

Environmental Product Declaration

In accordance with ISO 14025 and EN 15804:2012+A2:2019

ODE Starflex & Evomineral 035 Glasswool Insulation Materials

Programme:

The International EPD® System
www.environdec.com

Programme Operator:

EPD Turkey, fully aligned
with International EPD System

S-P Code:

S-P-03935

Publication Date:

16.06.2021

Validity Date:

15.06.2026

Geographical Scope:

Global



An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

Programme Information

Programme	The International EPD® System	EPD Turkey, managed and run by:
	EPD International AB Box 210 60 SE-100 31 Stockholm, Sweden	SÜRATAM, www.suratam.org Nef 09 B Blok No:7/15 34415 Kağıthane/Istanbul, Turkey
	www.environdec.com info@environdec.com	www.epdturkey.org info@epdturkey.org
Product Category Rules (PCR):	2019:14 Version 1.11, 2021-02-05, Construction Products and CPC 54 Construction Services, EN 15804:2012 + A2:2019 Sustainability of Construction Works	
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	EPD process certification EPD verification X	
Third party verifier:	Professor Vladimír Kocí	
Approved by:	The International EPD® System	
Procedure for follow-up of data during EPD validity involves third party verifier: NO		

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.

About ODE

ODE embarked on its business journey in 1985 with contracting operations. In 1998, ODE decided to move forward in the insulation industry, one that would serve Turkey's need. Having become an importer in 1990 and a manufacturer in 1996, ODE now manufactures products in 2 main categories, Building and HVAC insulation. ODE is now among the largest manufacturers of the insulation industry with 5 state-of-the-art manufacturing facilities, over 4 thousand product varieties, and expert workforce.

We manufacture extruded polystyrene thermal insulating material under the brand of ODE Isıpan; polymer modified bituminous waterproofing blankets under the brand of ODE Membrane, glass wool products used for heat and sound insulation and fire safety under the brand of ODE Starflex; and elastomeric rubber foam insulating material under the brand of ODE R-Flex.

As its Eskişehir Manufacturing Facility comes into play, ODE which currently exports to 5 continents aims to increase its export capacity even further, and become the leader in waterproofing in Turkey.

ODE reflects its social responsibility awareness to all its operations, and is the first company in the insulation industry of Turkey to publish a "Corporate Social Responsibility Report". Furthermore, ODE has been the first among its peers to earn the internationally recognized Environmental Product Declaration (EPD) certificate which is compatible with European standards and which applies for all markets to all heat and water insulation products manufactured by ODE in its facilities in Çorlu.

Having implemented pioneering efforts toward raising public awareness of insulation and energy awareness, and taking care to be involved in projects that will hand down permanent value to the future, ODE changed its company motto to "Insulates the Future" in 2014. In knowledge of the universal responsibility of being in the global market, ODE continues to operate as a company which encourages its social stakeholders through visionary and innovative work.



*ODE Çorlu/Tekirdağ, Turkey
Production Facilities*



*ODE Eskişehir, Turkey
Production Facilities*

About Product

ODE Glasswool blankets, boards and pipes are the insulating blankets, boards and pipes used for thermal and sound insulation of buildings and HVAC ducts from outside. ODE Glasswool has products with facing and without facing.

The ODE Glasswool Blanket Group is manufactured in the thermal conductivity range of $\lambda = 0.032\text{--}0.044\text{ W/(m.K)}$.

The weight providing $1\text{ m}^2\text{K/W}$ thermal insulation is 0.63 kg .

ADVANTAGES

- It is used for thermal insulation, sound insulation, acoustic design, and for the purposes of fire safety.
- Its classification as a "Class A1 Non-Combustible" (EN 13501-1) material is a very significant advantage for fire safety.*
- It easily conforms to all types of wooden and metal roofs.
- Since it is lightweight, it is very easy to lift up to the roof and to cut and install.
- Due to the properties of glass wool, it does not tear or produce wastage during installation.
- It does not degrade, decompose, become mouldy in time.
- Thanks to its natural content, it does not degrade and is user friendly.
- It is EUCB certified as not harmful to human health.

* Unfaced types.



For product accessories, certificates and detailed information, please click or scan the QR code

Technical Specifications

	UNIT	Value
Thickness	mm	25-200
Reaction to Fire	Euro Class	A1
Thermal Conductivity (λ) (10°C)	W/(m.K)	0.035
Thermal Resistance (R)	(m²K)/W	0.70-5.70
Water Vapor Permeability	μ	1.1
Maximum Service Temperature	°C	250

APPLICATION AREA

Depending on the field and purpose of application, blankets and panels with different coating materials are available at different sizes and technical properties. ODE Starflex Glasswool insulation products are mainly used for thermal insulation whereas they can be used for acoustic insulation.

PRODUCT CONTENT

Components	Amount, %
Cullet	70-80
Borax	<10%
Sand	<7%
Soda Ash	<5%
Additives	<5%



Why do I need insulation?

The cheapest energy is the one that is unexpended. Apart from energy efficiency, there are also additional benefits of insulation construction, which are determined below.

- Insulation prevents fuel consumption, therefore decreases waste-gas emissions, which cause global warming and environmental pollution.
- Insulation provides concrete resistivity by averting concrete corrosion. Thus, it increases the durability and the safety of the building against earthquakes.
- Insulation saves %60 of the expenditure on heating & cooling the building. It assists better quality of heating during winter, and better quality of cooling during summer.
- Insulation assists on avoiding the formation of mould growth, black spots and whitcomb in houses by preventing condensation.
- Insulation raises the life standard by balancing the temperature of the building. Thus, it provides a snuggy and heathy environment in our life time ritual.
- Insulation plays crucial role in country's economy by decreasing energy dependency on other countries.

LCA Information

Functional Unit	1 R (m ² K/W) ODE Starflex & Evomineral 035 Glasswool Insulation Materials
Time Representativeness	2020
Database(s) and LCA Software Used	Ecoinvent 3.6, SimaPro 9.1

X	A1	Raw Material Supply	Product Stage
X	A2	Transport	
X	A3	Manufacturing	
X	A4	Transport	Construction Process Stage
X	A5	Construction Installation	
ND	B1	Use	Use Stage
ND	B2	Maintenance	
ND	B3	Repair	
ND	B4	Replacement	
ND	B5	Refurbishment	
ND	B6	Operational Energy Use	
ND	B7	Operational Water Use	
X	C1	Deconstruction, demolition	End of Life Stage
X	C2	Transport	
X	C3	Waste Processing	
X	C4	Disposal	
X	D	Future reuse, recycling or energy recovery potentials	Benefits and Loads


X = Included in LCA, ND = Not Declared

The EPD evaluates the environmental impacts of 1 m²K/W ODE Starflex & Evomineral 035 Glasswool products and during the modeling, all values are taken into account for this unit.

The inventory for the LCA study is based on the 2020 production figures for Starflex and Evomineral 035 Glasswool by ODE.

The system boundaries in tabular form for all modules are shown in the table left. This EPD's system boundary is cradle to grave. The system boundary covers A1 - A3 Product Stages, A4-A5 Construction Process Stage and C1-C4 End of Life Stage.

System Boundary

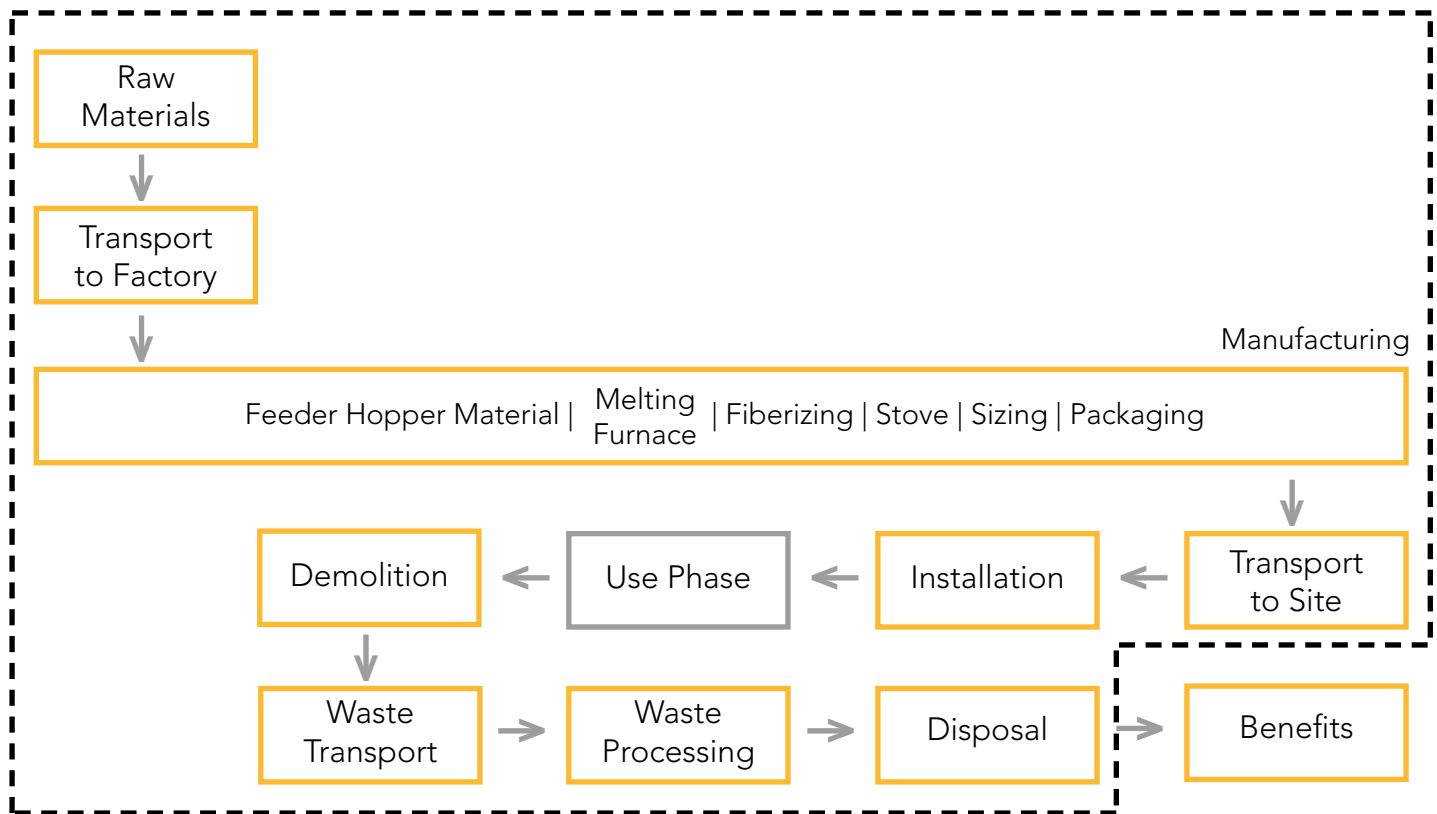

A1: Raw Material Supply

ODE Glaswool products production starts with raw materials, mainly locally sourced but some transported from other parts of the world. Environmental impacts during the production of all raw materials are reflected in this EPD.

A2: Transport to Factory

Transport is relevant for delivery of raw materials to the plant and internal transport within the manufacturing plant for each product.

A3 : Manufacturing

Manufacture of glasswool products are starts with feeder continues with melting silica sand at high temperatures and making it fibres. Both natural gas and electricity are consumed

during the production of glasswool insulation materials. Electricity consumed within the packaging process is also considered in manufacturing stages.

A4 : Transport to Site

Manufactured products are sent to customers in different parts of the world. 200 km of road transport and 2000 km (1243 miles) of sea transport are assumed for transportation to clients or to the construction site.

A5 : Installation

Glasswool products are direct applied to the surface. For installation of glasswool products, 100g/m² plastic fixing pin using is assumed.

C1 : Demolition

It is assumed that there is no energy use during uninstalation process. This stage is usually done by manpower.

C2 : Waste Transport

Average distance from demolition site to final destination is assumed as 100 km.

C3 : Waste Processing

There is no need for any waste process.

C4 : Disposal


For XPS products, relevant disposal scenarios

are modelled by taking into consideration the fate of the construction and packaging wastes. All construction products disposed into a landfill, which is modelled as such in this LCA. Packaging waste is assumed to end up at packaging recycling.

D : Benefits & Loads

There is no potential benefit as the products go completely to the landfill at the end of life. Only the benefit from packaging recycling is taken into account in this LCA model.

Insulates the Future

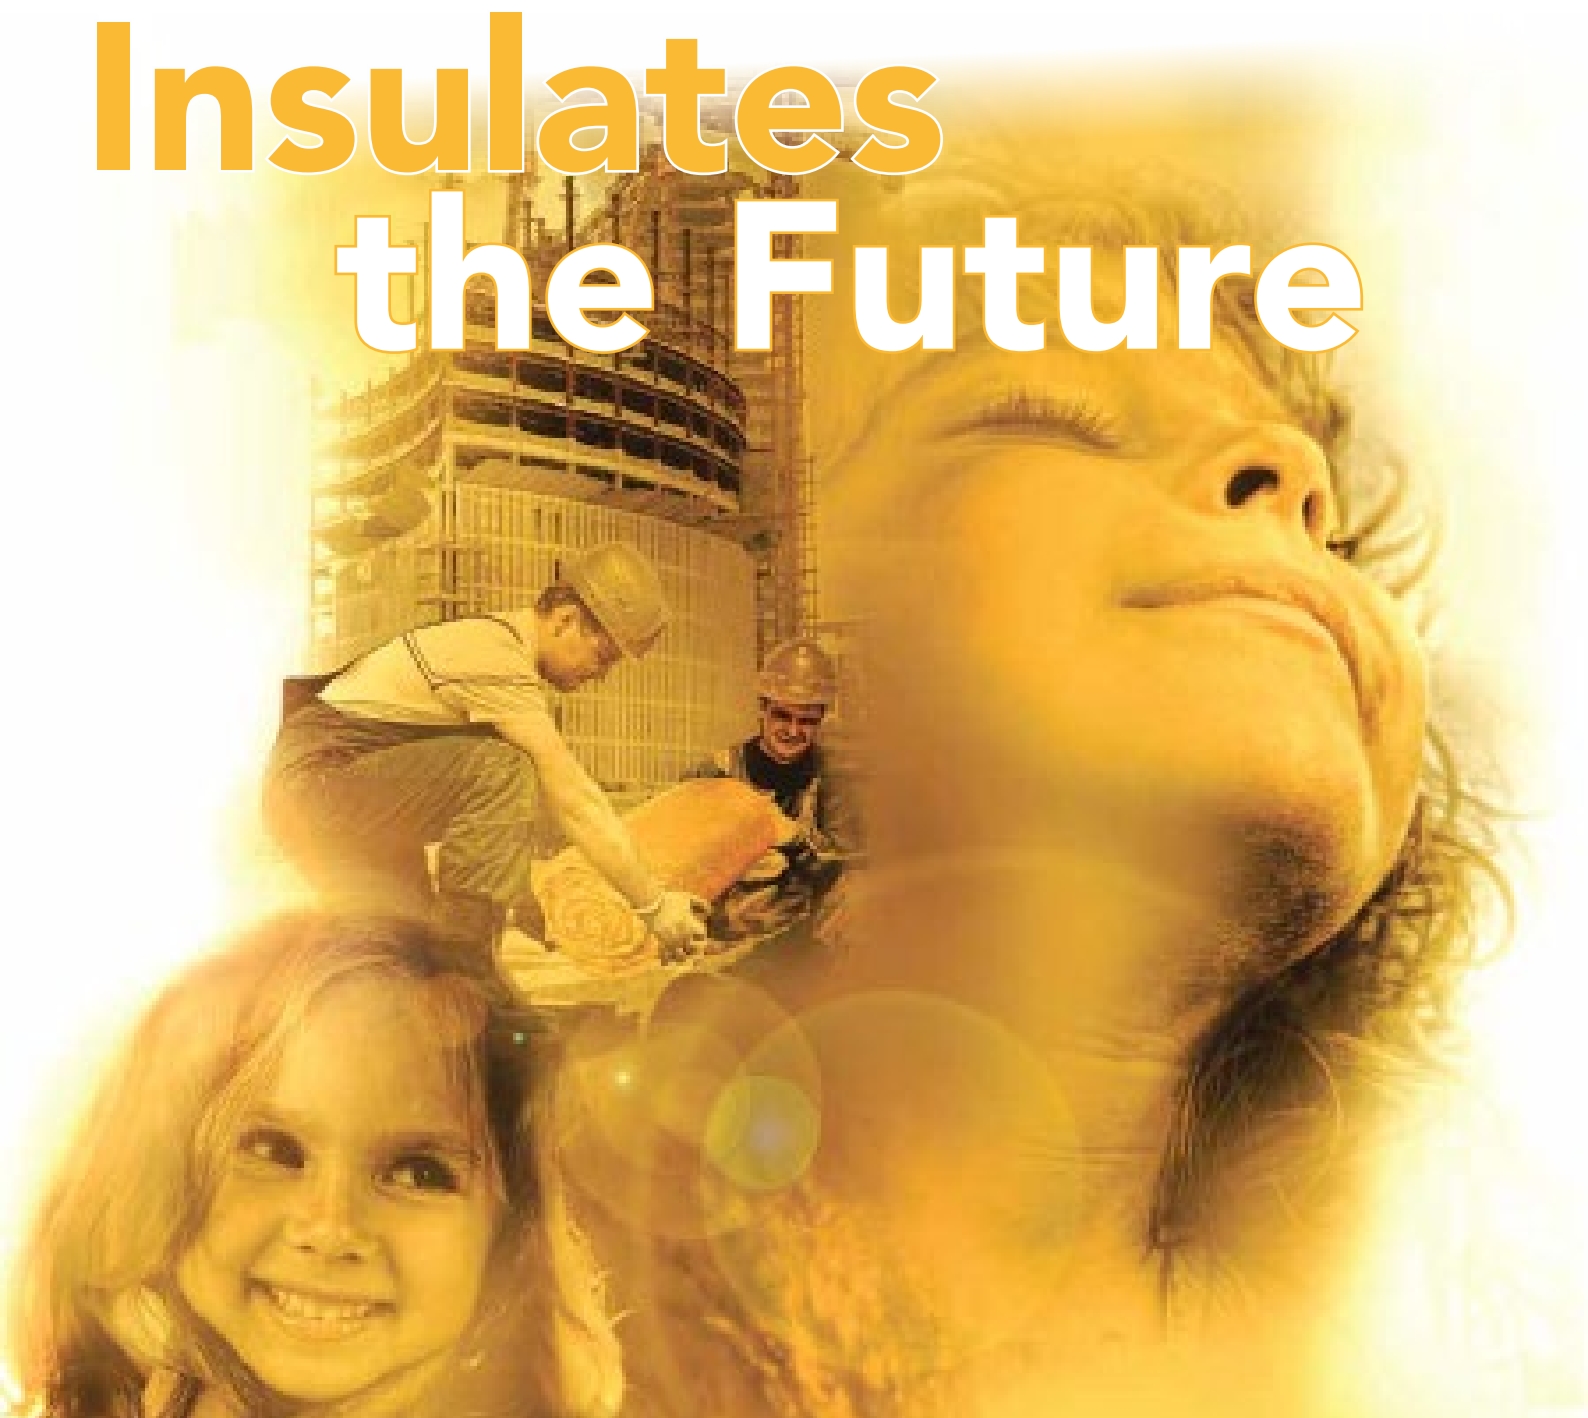

More Information

Allocations

There are no co-products in the production of ODE. Hence, there is no need for co-product allocation. Transport is allocated according to tonnages for almost all raw materials bought by ODE. For the manufacturing of product, no allocation for energy consumption or water consumption was made as the product specific data was available.

Water consumption, energy consumption and raw material transportation were weighted according to 2020 production figures.

In addition, hazardous and non-hazardous waste amounts were also allocated from the 2020 total waste generation.

Cut-Off Criteria

1% cut-off rule is applied to raw materials less than 1% in the composition but making sure their total is below this threshold.

REACH Regulation

No substances included in the Candidate List of Substances of Very High Concern for authorization under the REACH regulations are present in this product either above the threshold for registration with the European Chemicals Agency or above 0.1 % (wt/wt).

LCA Modelling, Calculation and Data Quality

The results of the LCA with the indicators as per EPD requirement are given in the LCA result tables. All energy calculations were obtained using Cumulative Energy Demand (LHV) methodology, while fresh water use is calculated with selected inventory flows in SimaPro according to the PCR.

The SimaPro 9.1 LCA software and the Ecoinvent 3.6 LCA database were used to calculate the environmental impacts. Ecoinvent database were used as generic background data source.

The regional energy datasets were used for all energy calculations.

Geographical Scope

The geographical scope of this EPD is global.

Comperability

A comparison or an evaluation of EPD data is only possible where EN 15804 has been followed, and the same building context and product-specific characteristics of performance are taken into account and the same stages have been included in the system boundary. According to EN 15804, EPD of construction products may not be comperable if they do not comply with the standards.



LCA

Results

Environmental Impacts for 1 m²KW ODE Starflex & Evomineral 035 Glaswool Insulation Materials (Without Facing)									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
GWP - Fossil	kg CO ₂ eq	1.20	0.039	0.859	0	0.011	0	0.038	-0.011
GWP - Biogenic	kg CO ₂ eq	0.009	6.92E-6	0.003	0	4.20E-6	0	0.565	265E-6
GWP - Luluc	kg CO ₂ eq	0.005	18.0E-6	617E-9	0	3.93E-6	0	11.4E-6	-8.25E-6
GWP - Total	kg CO ₂ eq	1.22	0.039	0.863	0	0.011	0	0.603	-0.011
ODP	kg CFC-11 eq	128E-9	8.31E-9	248E-12	0	2.37E-9	0	2.27E-9	-346E-12
AP	mol H ⁺ eq	0.005	500E-6	0.004	0	45.4E-6	0	113E-6	-47.0E-6
EP - Freshwater	kg P eq	486E-6	2.76E-6	44.4E-6	0	918E-9	0	10.3E-6	-3.22E-6
*EP - Freshwater	kg PO ₄ eq	0.001	8.45E-6	136E-6	0	2.81E-6	0	31.6E-6	-9.85E-6
EP - Marine	kg N eq	0.001	128.3E-6	0.001	0	13.4E-6	0	0.001	-9.21E-6
EP - Terrestrial	mol N eq	0.009	0.001	0.007	0	146E-6	0	308E-6	-94.8E-6
POCP	kg NMVOC	0.003	384E-6	0.002	0	44.5E-6	0	221E-6	-43.0E-6
ADPE	kg Sb eq	7.48E-6	807E-9	291E-9	0	287E-9	0	94.0E-9	-102.3E-9
ADPF	MJ	19.5	0.555	12.6	0	0.161	0	0.214	-0.301
WDP	m³ depriv.	0.873	0.002	0.971	0	522E-6	0	0.007	-0.008
PM	disease inc.	40.0E-9	2.25E-9	30.2E-9	0	755E-12	0	1.33E-9	-368E-12
IR	kBq U-235 eq	0.050	0.003	113E-6	0	750E-6	0	0.001	-0.001
ETP - FW	CTUe	15.2	0.452	1.11	0	0.142	0	3.23	-0.128
HTTP - C	CTUh	537E-12	15.9E-12	82.2E-12	0	3.65E-12	0	20.1E-12	-3.20E-12
HTTP - NC	CTUh	7.99E-9	435E-12	1.56E-9	0	143E-12	0	1E-9	-88.3E-12
SQP	Pt	1.99	0.293	0.012	0	0.109	0	0.384	-0.048
Acronyms	GWP-total: Climate change, GWP-fossil: Climate change- fossil, GWP-biogenic: Climate change - biogenic, GWP-luluc: Climate change - land use and transformation, ODP: Ozone layer depletion, AP: Acidification terrestrial and freshwater, EP-freshwater: Eutrophication freshwater, EP-marine: Eutrophication marine, EP-terrestrial: Eutrophication terrestrial, POCP: Photochemical oxidation, ADPE: Abiotic depletion - elements, ADPF: Abiotic depletion - fossil resources, WDP: Water scarcity, PM: Respiratory inorganics - particulate matter, IR: Ionising radiation, ETP-FW: Ecotoxicity freshwater, HTP-c: Cancer human health effects, HTP-nc: Non-cancer human health effects, SQP: Land use related impacts, soil quality.								
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A2-A3: Sum of A1, A2 and A3, A4:Transport to Site, A5: Installation, C1: Demolition, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads.								

**This indicator has been calculated as "kg P eq" as required in the characterization model. (EUTREND model, Struijs et al, 2009b, as implemented in ReCiPe; <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>)*

Resource Use for 1 m²K/W 1 m³K/W ODE Starflex & Evomineral 035 Glaswool Insulation Materials (Without Facing)									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	1.37	0.006	0.133	0	0.002	0	0.009	-0.013
PERM	MJ	0	0	0	0	0	0	0	0
PERT	MJ	1.37	0.006	0.133	0	0.002	0	0.009	-0.013
PENRE	MJ	19.5	0.555	12.6	0	0.161	0	0.214	-0.301
PENRM	MJ	0	0	0	0	0	0	0	0
PENRT	MJ	19.5	0.555	12.6	0	0.161	0	0.214	-0.301
SM	kg	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m³	0.004	83.8E-6	0.017	0	27.8E-6	0	197E-6	-38.5E-6
Waste & Output Flows for 1 m²K/W ODE Starflex & Evomineral 035 Glaswool Insulation Materials (Without Facing)									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	66.3E-6	0	0	0	0	0	0	0
NHWD	kg	0.071	0	0	0	0	0	0	0
RWD	MJ	0	0	0	0	0	0	0	0
CRU	MJ	0	0	0	0	0	0	0	0
MFR	MJ	0	0	0	0	0	0	0	0
MER	MJ	0	0	0	0	0	0	0	0
EE (Electrical)	kg	0	0	0	0	0	0	0	0
EE (Thermal)	MJ	0	0	0	0	0	0	0	0
Acronyms	PERE: Use of renewable primary energy excluding resources used as raw materials, PERM: Use of renewable primary energy resources used as raw materials, PERT: Total use of renewable primary energy, PENRE: Use of non-renewable primary energy excluding resources used as raw materials, PENRM: Use of non-renewable primary energy resources used as raw materials, PENRT: Total use of non-renewable primary energy, SM: Secondary material, RSF: Renewable secondary fuels, NRSF: Non-renewable secondary fuels, FW: Net use of fresh water, HWD: Hazardous waste disposed, NHWD: Non-hazardous waste disposed, RWD: Radioactive waste disposed, CRU: Components for reuse, MFR: Material for recycling, MER: Materials for energy recovery, EE (Electrical): Exported energy electrical, EE (Thermal): Exported energy, Thermal.								
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A2-A3: Sum of A1, A2 and A3, A4: Transport to Site, A5: Installation, C1: Demolition, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads.								

Environmental Impacts for 1 m²KW ODE Starflex & Evomineral 035 Glaswool Insulation Materials (With Aluminium Foil Facing)									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
GWP - Fossil	kg CO ₂ eq	1.75	0.039	0.859	0	0.011	0	0.043	-0.011
GWP - Biogenic	kg CO ₂ eq	0.009	6.92E-6	0.003	0	4.20E-6	0	0.646	265E-6
GWP - Luluc	kg CO ₂ eq	0.007	18.0E-6	617E-9	0	3.93E-6	0	13.0E-6	-8.25E-6
GWP - Total	kg CO ₂ eq	1.77	0.039	0.863	0	0.011	0	0.689	-0.011
ODP	kg CFC-11 eq	153E-9	8.31E-9	248E-12	0	2.37E-9	0	2.60E-9	-346E-12
AP	mol H+ eq	0.008	500E-6	0.004	0	45.4E-6	0	129E-6	-47.0E-6
EP - Freshwater	kg P eq	680E-6	2.76E-6	44.4E-6	0	918E-9	0	11.8E-6	-3.22E-6
*EP - Freshwater	kg PO ₄ eq	0.002	8.45E-6	136E-6	0	2.81E-6	0	36.2E-6	-9.85E-6
EP - Marine	kg N eq	0.001	128E-6	0.001	0	13.4E-6	0	0.001	-9.21E-6
EP - Terrestrial	mol N eq	0.015	0.001	0.007	0	146E-6	0	352E-6	-94.8E-6
POCP	kg NMVOC	0.005	384E-6	0.002	0	44.5E-6	0	253E-6	-43.0E-6
ADPE	kg Sb eq	277.9E-6	807E-9	291E-9	0	287E-9	0	107.4E-9	-102E-9
ADPF	MJ	25.0	0.555	12.6	0	0.161	0	0.245	-0.301
WDP	m³ depriv.	1.01	0.002	0.971	0	522E-6	0	0.009	-0.008
PM	disease inc.	78.6E-9	2.25E-9	30.2E-9	0	755E-12	0	1.52E-9	-368E-12
IR	kBq U-235 eq	0.072	0.003	113E-6	0	750E-6	0	0.002	-0.001
ETP - FW	CTUe	31.1	0.452	1.11	0	0.142	0	3.69	-0.128
HTTP - C	CTUh	1.27E-9	15.9E-12	82.2E-12	0	3.65E-12	0	23.0E-12	-3.20E-12
HTTP - NC	CTUh	22.1E-9	435E-12	1.56E-9	0	143E-12	0	1.15E-9	-88.3E-12
SQP	Pt	3.27	0.293	0.012	0	0.109	0	0.439	-0.048
Acronyms	GWP-total: Climate change, GWP-fossil: Climate change- fossil, GWP-biogenic: Climate change - biogenic, GWP-luluc: Climate change - land use and transformation, ODP: Ozone layer depletion, AP: Acidification terrestrial and freshwater, EP-freshwater: Eutrophication freshwater, EP-marine: Eutrophication marine, EP-terrestrial: Eutrophication terrestrial, POCP: Photochemical oxidation, ADPE: Abiotic depletion - elements, ADPF: Abiotic depletion - fossil resources, WDP: Water scarcity, PM: Respiratory inorganics - particulate matter, IR: Ionising radiation, ETP-FW: Ecotoxicity freshwater, HTP-c: Cancer human health effects, HTP-nc: Non-cancer human health effects, SQP: Land use related impacts, soil quality.								
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A2-A3: Sum of A1, A2 and A3, A4:Transport to Site, A5: Installation, C1: Demolition, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads.								

**This indicator has been calculated as "kg P eq" as required in the characterization model. (EUTREND model, Struijs et al, 2009b, as implemented in ReCiPe; <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>)*

Resource Use for 1 m²K/W 1 m²K/W ODE Starflex & Evomineral 035 Glaswool Insulation Materials (With Aluminium Foil Facing)									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	2.03	0.006	0.133	0	0.002	0	0.011	-0.013
PERM	MJ	0	0	0	0	0	0	0	0
PERT	MJ	2.03	0.006	0.133	0	0.002	0	0.011	-0.013
PENRE	MJ	25.0	0.555	12.6	0	0.161	0	0.245	-0.301
PENRM	MJ	0	0	0	0	0	0	0	0
PENRT	MJ	25.0	0.555	12.6	0	0.161	0	0.245	-0.301
SM	kg	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m³	0.009	83.8E-6	0.017	0	27.8E-6	0	225E-6	-38.5E-6
Waste & Output Flows for 1 m²K/W ODE Starflex & Evomineral 035 Glaswool Insulation Materials (With Aluminium Foil Facing)									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	66.3E-6	0	0	0	0	0	0	0
NHWD	kg	0.071	0	0	0	0	0	0	0
RWD	MJ	0	0	0	0	0	0	0	0
CRU	MJ	0	0	0	0	0	0	0	0
MFR	MJ	0	0	0	0	0	0	0	0
MER	MJ	0	0	0	0	0	0	0	0
EE (Electrical)	kg	0	0	0	0	0	0	0	0
EE (Thermal)	MJ	0	0	0	0	0	0	0	0
Acronyms	PERE: Use of renewable primary energy excluding resources used as raw materials, PERM: Use of renewable primary energy resources used as raw materials, PERT: Total use of renewable primary energy, PENRE: Use of non-renewable primary energy excluding resources used as raw materials, PENRM: Use of non-renewable primary energy resources used as raw materials, PENRT: Total use of non-renewable primary energy, SM: Secondary material, RSF: Renewable secondary fuels, NRSF: Non-renewable secondary fuels, FW: Net use of fresh water, HWD: Hazardous waste disposed, NHWD: Non-hazardous waste disposed, RWD: Radioactive waste disposed, CRU: Components for reuse, MFR: Material for recycling, MER: Materials for energy recovery, EE (Electrical): Exported energy electrical, EE (Thermal): Exported energy, Thermal.								
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A2-A3: Sum of A1, A2 and A3, A4: Transport to Site, A5: Installation, C1: Demolition, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads.								

Environmental Impacts for 1 m²KW ODE Starflex 035 Glaswool Insulation Pipe									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
GWP - Fossil	kg CO ₂ eq	1.75	0.039	0.859	0	0.011	0	0.043	-0.011
GWP - Biogenic	kg CO ₂ eq	0.009	6.92E-6	0.003	0	4.20E-6	0	0.646	265E-6
GWP - Luluc	kg CO ₂ eq	0.007	18.0E-6	617E-9	0	3.93E-6	0	13.0E-6	-8.25E-6
GWP - Total	kg CO ₂ eq	1.77	0.039	0.863	0	0.011	0	0.689	-0.011
ODP	kg CFC-11 eq	153E-9	8.31E-9	248E-12	0	2.37E-9	0	2.60E-9	-346E-12
AP	mol H+ eq	0.008	500E-6	0.004	0	45.4E-6	0	129E-6	-47.0E-6
EP - Freshwater	kg P eq	680E-6	2.76E-6	44.4E-6	0	918E-9	0	11.8E-6	-3.22E-6
*EP - Freshwater	kg PO ₄ eq	0.002	8.45E-6	136E-6	0	2.81E-6	0	36.2E-6	-9.85E-6
EP - Marine	kg N eq	0.001	128E-6	0.001	0	13.4E-6	0	0.001	-9.21E-6
EP - Terrestrial	mol N eq	0.015	0.001	0.007	0	146E-6	0	352E-6	-94.8E-6
POCP	kg NMVOC	0.005	384E-6	0.002	0	44.5E-6	0	253E-6	-43.0E-6
ADPE	kg Sb eq	277.9E-6	807E-9	291E-9	0	287E-9	0	107.4E-9	-102E-9
ADPF	MJ	25.0	0.555	12.6	0	0.161	0	0.245	-0.301
WDP	m³ depriv.	1.01	0.002	0.971	0	522E-6	0	0.009	-0.008
PM	disease inc.	78.6E-9	2.25E-9	30.2E-9	0	755E-12	0	1.52E-9	-368E-12
IR	kBq U-235 eq	0.072	0.003	113E-6	0	750E-6	0	0.002	-0.001
ETP - FW	CTUe	31.1	0.452	1.11	0	0.142	0	3.69	-0.128
HTTP - C	CTUh	1.27E-9	15.9E-12	82.2E-12	0	3.65E-12	0	23.0E-12	-3.20E-12
HTTP - NC	CTUh	22.1E-9	435E-12	1.56E-9	0	143E-12	0	1.15E-9	-88.3E-12
SQP	Pt	3.27	0.293	0.012	0	0.109	0	0.439	-0.048
Acronyms	GWP-total: Climate change, GWP-fossil: Climate change- fossil, GWP-biogenic: Climate change - biogenic, GWP-luluc: Climate change - land use and transformation, ODP: Ozone layer depletion, AP: Acidification terrestrial and freshwater, EP-freshwater: Eutrophication freshwater, EP-marine: Eutrophication marine, EP-terrestrial: Eutrophication terrestrial, POCP: Photochemical oxidation, ADPE: Abiotic depletion - elements, ADPF: Abiotic depletion - fossil resources, WDP: Water scarcity, PM: Respiratory inorganics - particulate matter, IR: Ionising radiation, ETP-FW: Ecotoxicity freshwater, HTP-c: Cancer human health effects, HTP-nc: Non-cancer human health effects, SQP: Land use related impacts, soil quality.								
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A2-A3: Sum of A1, A2 and A3, A4:Transport to Site, A5: Installation, C1: Demolition, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads.								

**This indicator has been calculated as "kg P eq" as required in the characterization model. (EUTREND model, Struijs et al, 2009b, as implemented in ReCiPe; <http://eplca.jrc.ec.europa.eu/LCDN/developerEF.xhtml>)*

Resource Use for 1 m²K/W 1 m²K/W ODE Starflex 035 Glaswool Insulation Pipe									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	2.03	0.006	0.133	0	0.002	0	0.011	-0.013
PERM	MJ	0	0	0	0	0	0	0	0
PERT	MJ	2.03	0.006	0.133	0	0.002	0	0.011	-0.013
PENRE	MJ	25.0	0.555	12.6	0	0.161	0	0.245	-0.301
PENRM	MJ	0	0	0	0	0	0	0	0
PENRT	MJ	25.0	0.555	12.6	0	0.161	0	0.245	-0.301
SM	kg	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m³	0.009	83.8E-6	0.017	0	27.8E-6	0	225E-6	-38.5E-6
Waste & Output Flows for 1 m²K/W ODE Starflex 035 Glaswool Insulation Pipe									
Impact Category	Unit	A1-A2-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	66.3E-6	0	0	0	0	0	0	0
NHWD	kg	0.071	0	0	0	0	0	0	0
RWD	MJ	0	0	0	0	0	0	0	0
CRU	MJ	0	0	0	0	0	0	0	0
MFR	MJ	0	0	0	0	0	0	0	0
MER	MJ	0	0	0	0	0	0	0	0
EE (Electrical)	kg	0	0	0	0	0	0	0	0
EE (Thermal)	MJ	0	0	0	0	0	0	0	0
Acronyms	PERE: Use of renewable primary energy excluding resources used as raw materials, PERM: Use of renewable primary energy resources used as raw materials, PERT: Total use of renewable primary energy, PENRE: Use of non-renewable primary energy excluding resources used as raw materials, PENRM: Use of non-renewable primary energy resources used as raw materials, PENRT: Total use of non-renewable primary energy, SM: Secondary material, RSF: Renewable secondary fuels, NRSF: Non-renewable secondary fuels, FW: Net use of fresh water, HWD: Hazardous waste disposed, NHWD: Non-hazardous waste disposed, RWD: Radioactive waste disposed, CRU: Components for reuse, MFR: Material for recycling, MER: Materials for energy recovery, EE (Electrical): Exported energy electrical, EE (Thermal): Exported energy, Thermal.								
Legend	A1: Raw Material Supply, A2: Transport, A3: Manufacturing, A1-A2-A3: Sum of A1, A2 and A3, A4: Transport to Site, A5: Installation, C1: Demolition, C2: Waste Transport, C3: Waste Processing, C4: Disposal, D: Benefits and Loads.								

References

/GPI/ General Programme Instructions of the International EPD® System. Version 4.0

/ISO 9001/ Quality management systems – Requirements

/ISO 14001/ Environment Management System- Requirements

/EN 15804:2012+A2:2019/ Sustainability of construction works - Environmental Product Declarations — Core rules for the product category of construction products

/ISO 14020:2000/ Environmental labels and declarations — General principles

/ISO 14025/ ISO 14025:2006 Preview Environmental labels and declarations -- Type III environmental declarations -- Principles and procedures

/ISO 14040-44/ ISO 14040:2006-10, Environmental management - Life cycle assessment -Principles and framework (ISO 14040:2006) and Requirements and guidelines (ISO 14044:2006)

/ISO 27001/ ISO 27001-2013 Information Security Management System - Requirements

/ISO 45001/ Health and Safety Management System - Requirements

/ISO 50001/ Energy Management Certificate - Requirements

/PCR for Construction Products and CPC 54 Construction Services/ Prepared by IVL
IVL Swedish Environmental Research Institute Secretariat of the International EPD® System, 2019:14 Version 1.11, DATE 2021-02-05

/Ecoinvent/ Ecoinvent Centre, www.ecoinvent.org

/SimaPro/ SimaPro LCA Package, Pré Consultants, the Netherlands, www.pre-sustainability.com

Contact Informations

Programme	EPD registered through fully aligned regional programme: EPD Turkey: www.epdturkey.org  ENVIRONMENTAL PRODUCT DECLARATIONS	The International EPD® System www.environdec.com  THE INTERNATIONAL EPD® SYSTEM
Programme operator	EPD Turkey: SÜRATAM – Turkish Centre for Sustainable Production Research & Design Nef 09 B Blok No:7/15, 34415 Kagithane / Istanbul, TURKEY www.epdturkey.org info@epdturkey.org	EPD International AB Box 210 60 SE-100 31 Stockholm, Sweden www.environdec.com info@environdec.com
Owner of the declaration	 ODE Industry and Trade Inc. Piyale Paşa Bulvarı Ortadoğu Plaza K.12 34384 Okmeydanı Şişli / İstanbul/Turkey	Contact: Derya Gürbüz Ilgaz Quality Manager Phone: +90 212 210 49 06 www.ode.com.tr ode@ode.com.tr
LCA practitioner & EPD Design	 Turkey: Lalegül Sok. No:7/18 Kagithane 34415 4. Levent – Istanbul, Turkey +90 212 281 13 33	United Kingdom: 4 Clear Water Place Oxford OX2 7NL, UK 0 800 722 0185 www.metsims.com info@metsims.com
3rd party verifier		Professor Vladimír Kocí LCA Studio Šárecká 5,16000 Prague 6 - Czech Republic www.lcastudio.cz



INSULATES THE FUTURE

www.ode.com.tr