



# Environmental Product Declaration of Reflective Glass – Hard Coated & Soft Coated

In accordance with EN 15804 and ISO 14025

**ASAHI INDIA GLASS LTD.(AIS)**

**October 2018**

EPD registration number:	S-P-01115
Publication date:	2018-11-01
Validity date:	2023-10-31
Geographical scope:	India

## 1. Introduction

This current declaration aims to provide the effects measurable and verifiable for the environmental assessment of 1 m<sup>2</sup> of Reflective Glass (hard coated and soft coated) of varying thicknesses manufactured at Asahi India Glass Ltd. (AIS)

Asahi India Glass Ltd. (AIS) is India's leading integrated glass solutions company and a dominant player both in the automotive glass and architectural glass segments. It commands over 70% share in the Indian automotive glass market. Established in 1984, AIS is an outcome of a Joint Venture between the Labroo family, Asahi Glass Co. Limited Japan, and Maruti Suzuki India Limited. AIS is an ISO 9001, OHSAS 14001, EnMS 50001 and ISO 14001 company listed on the National Stock Exchange Limited and Bombay Stock Exchange Limited.

Today, more than ever, AIS - India's leading glass manufacturer, is driven to market-leading innovations providing the right blend between daylight and energy saving, visual and thermal comfort, technology and sensitivity, along with state-of-the-art glass manufacturing plants. AIS enables an age of Green Buildings and supporting a truly sustainable future resources and offers effective solutions for waste management including testing and co-processing.

Life Cycle Assessment approach is one of the key tool for evaluating and assessing the environmental burdens associated with resource consumption, energy consumption, emissions, effluent and solid waste generation during the life span of the product. It means the study helps in identifying the "hot-spots" with respect to various environment parameters at various stages of production process value chain.

The EPD is declared for a) Reflective glass with hard coating (online coating) and b) Reflective glass with soft coating (offline coating) manufactured at Roorkee and Talaja units of AIS respectively

The LCA conducted is in accordance with PCR 2012:01 Construction products and construction services (EN 15804) for preparation of Environmental Product Declaration (EPD).

## 2. General Information

### 2.1 EPD, PCR, LCA Information

**Table 1 EPD Information**

Programme	The International EPD® System, www.environdec.com
Program operator	EPD International AB Box 210 60, SE- 100 31 Stockholm, Sweden.
Declaration holder	Mr. Praveen Saini Asahi India Glass Ltd Unit Head – Quality Assurance Platinum Techno Park, Sector 30, Vashi Navi Mumbai, Maharashtra 400703, India Email: <a href="mailto:praveen.saini@aisglass.com">praveen.saini@aisglass.com</a>
Product	Coated Glass, CPC Code: 37113
Reference standards	ISO 14025:2010; ISO 14001; ISO 14040/44 EN 15804:2012

**Table 2 PCR Information**

Reference PCR	PCR 2012:01 Construction products and construction services, version 2.2, in compliant with EN 15804
Date of Issue	2018-11-01
Period of Validity	2023-10-31

**Table 3 Verification Information**

Demonstration of verification	External, independent verification
Third party verifier	Dr Hudai Kara, Metsims Sustainability Consulting, 4 Clear Water Place, Oxford OX2 7NL, UK Email: <a href="mailto:hudai.kara@metsims.com">hudai.kara@metsims.com</a>

**Table 4 LCA Information**

Title	Environmental Product Declaration of Reflective Glass - Hard Coated and Soft Coated
Preparer	Dr. Rajesh Kumar Singh Thinkstep Sustainability Solutions Pvt. Ltd. 421, MIDAS, Sahar Plaza, Andheri Kurla Road, Andheri East, Mumbai, India - 400059 Email: <a href="mailto:rajesh.singh@thinkstep.com">rajesh.singh@thinkstep.com</a>
Reference standards	ISO 14040/44 standard

## 2.2 Reference Period of EPD Data

The reference period for the data used within this EPD is the year April' 2016 – March' 2017

## 2.3 Geographical Scope of EPD Application

The geographical scope of this EPD is India.

## 2.4 Additional Information about EPD

AIS manufactures hard coated and soft coated Reflective Glass of varying thicknesses at their Roorkee and Taloja plants respectively. The EPD is declared for both the types of Reflective Glass. The upstream float glass for manufacturing Reflective glass has been considered as an average float glass comprising of weighted average production volume of clear and tinted float glass at AIS for the year April' 2016 – March' 2017. The target group of EPD are Green Building Certification Program holders and consultants, customers, project developers, statutory agencies and government.

This EPD is in accordance with ISO 14025 and EN 15804. EPD of construction products may not be comparable if they do not comply with EN 15804. Product Category Rules (PCR) used for the assessment of the environmental performance of glass is PCR 2012:01 Construction products and construction services, version 2.2, in compliant with EN 15804.

The environmental impacts are calculated on the basis of the functional unit wherein each flow related to material consumption, energy consumption, emissions, effluent and waste is scaled to the reference flow.

The processes listed below for the production of the final product including primary packaging is included. The processes which are mandatory to be included in plant operation, in particular are:

- Raw material production (mining and crushing)
- Batch mixing
- Float Glass production
- Coating of the float glass
- Cutting and Packing
- Storage and Dispatch of the coated float glass

The installation of glass in buildings, end of life and reuse is not included. Inbound transportation of raw materials and fuel are included and outbound transportation of glass product is not included

## 3. Product Description and System Boundaries

### 3.1 Product Identification and Usage

#### (A) Hard Coated Reflective Glass (On-line Coating)

Hard coated Reflective Glass is soda-lime silicate glass produced using the float procedure, on which a CVD coating has been applied. The glass is a reflective, solar control glass and is meant to be used in building and industrial applications.

This reflective solar control glass product is manufactured by a process known as “on-line Pyrolytic coating” or “hard coating” wherein silicon based coating is applied to the glass surface by means of pyrolysis. This coating gives it a number of properties:

- Total integration with surface of the glass,
- Strength and stability over time

- Solar control properties and a reflective appearance

Hard coating can be applied on both clear and tinted float glass. The product studied in the EPD is a representative of all hard coated glass, i.e., “Hard coating on 1m<sup>2</sup> of average float glass”.

Table 4 – 9 shows the performance data for hard coated reflective glass of various thicknesses. It is in accordance to EN 410 – 2011 standard.

### Hard Coated Clear Float Glass

**Table 4 Performance Data of Opal White Gold Glass (Hard Coat)**

Thickness (mm)	3	3.5	4	5	6	8	10	12
<b>Visible parameters</b>								
Light transmittance (LT) %	NA	NA	NA	58	63	NA	NA	NA
External light reflection (RLE) (%)	NA	NA	NA	37	34	NA	NA	NA
<b>Energetic parameters</b>								
Energy transmittance (ET) %	NA	NA	NA	53	64	NA	NA	NA
Energy absorbance (EA) %	NA	NA	NA	21	13	NA	NA	NA
Solar factor g	NA	NA	NA	60	68	NA	NA	NA

### Hard Coated Tinted Glass (Dark Grey)

**Table 5 Performance Data of Opal Pearl Grey (Hard Coat)**

Thickness (mm)	3	3.5	4	5	6	8	10	12
<b>Visible parameters</b>								
Light transmittance (LT) %	NA	20	20	15	NA	NA	NA	NA
External light reflection (RLE) (%)	NA	9	9	7	NA	NA	NA	NA
<b>Energetic parameters</b>								
Energy transmittance (ET) %	NA	37	36	30	NA	NA	NA	NA
Energy absorbance (EA) %	NA	71	70	61	NA	NA	NA	NA
Solar factor g	NA	51	50	46	NA	NA	NA	NA

### Hard Coated Tinted Glass (Aqua Blue)

**Table 6 Performance Data of Opal Royal Blue (Hard Coat)**

Thickness (mm)	3	3.5	4	5	6	8	10	12
<b>Visible parameters</b>								
Light transmittance (LT) %	NA	NA	28	25	20	NA	NA	NA
External light reflection (RLE) (%)	NA	NA	13	10	9	NA	NA	NA
<b>Energetic parameters</b>								
Energy transmittance (ET) %	NA	NA	41	36	33	NA	NA	NA
Energy absorbance (EA) %	NA	NA	58	51	70	NA	NA	NA
Solar factor g	NA	NA	53	49	47	NA	NA	NA

### Hard Coated Tinted Glass (Bronze)

Table 7 Performance Data of Opal Golden Bronze (Hard Coat)

Thickness (mm)	3	3.5	4	5	6	8	10	12
<b>Visible parameters</b>								
Light transmittance (LT) %	NA	NA	39	35	30	NA	NA	NA
External light reflection (RLE) (%)	NA	NA	19	14	13	NA	NA	NA
<b>Energetic parameters</b>								
Energy transmittance (ET) %	NA	NA	47	43	38	NA	NA	NA
Energy absorbance (EA) %	NA	NA	42	43	56	NA	NA	NA
Solar factor g	NA	NA	56	55	51	NA	NA	NA

### Hard Coated Tinted Glass (Green)

Table 8 Performance Data of Opal Cool Green (Hard Coat)

Thickness (mm)	3	3.5	4	5	6	8	10	12
<b>Visible parameters</b>								
Light transmittance (LT) %	NA	NA	48	44	NA	NA	NA	NA
External light reflection (RLE) (%)	NA	NA	26	22	NA	NA	NA	NA
<b>Energetic parameters</b>								
Energy transmittance (ET) %	NA	NA	41	36	NA	NA	NA	NA
Energy absorbance (EA) %	NA	NA	26	51	NA	NA	NA	NA
Solar factor g	NA	NA	53	47	NA	NA	NA	NA

### Hard Coated Tinted Glass (Dark Blue)

Table 9 Performance Data of Opal Aqua Blue (Hard Coat)

Thickness (mm)	3	3.5	4	5	6	8	10	12
<b>Visible parameters</b>								
Light transmittance (LT) %	NA	NA	NA	25	22	NA	NA	NA
External light reflection (RLE) (%)	NA	NA	NA	11	10	NA	NA	NA
<b>Energetic parameters</b>								
Energy transmittance (ET) %	NA	NA	NA	31	27	NA	NA	NA
Energy absorbance (EA) %	NA	NA	NA	58	67	NA	NA	NA
Solar factor g	NA	NA	NA	44	44	NA	NA	NA

The average float glass model has been considered by taking the weighted average production volume of clear and tinted float glass for FY 16-17 as shown in table 10.

Table 10 Production Volume of Clear and Tinted Float Glass

	Average Float Glass	Clear Float Glass	Tinted Float Glass
Quantity (in %)	100	60	40

100% of clear float glass is manufactured at Taloja plant and 100% tinted float glass is manufactured at Roorkee plant.

**(B) Soft Coated Reflective Glass (Off-line Coating)**

Soft coated Reflective Glass is soda-lime silicate glass produced using the float procedure, on which a magnetron coating has been applied. The glass is meant to be used in building, furniture and industrial applications. A combination of thin multiple metal oxide layers are applied to float glass using a magnetically enhance cathodic sputtering process under vacuum conditions.

Depending on the composition of these transparent coating layers, several different products can be produced, distinguishable by the thermal performance, spectrophotometric values and processing characteristics.

Soft coating can be applied on both clear and tinted float glass. The product studied in the EPD is a representative of all soft coated glass, i.e., “Soft coating on 1m<sup>2</sup> of average float glass”.

Table 11 – 16 shows the performance data for soft coated reflective glass of various thicknesses. It is in accordance to EN 410 – 2011 standard.

**Soft Coated Clear Float Glass**

**Table 11 Performance Data of Soft Coated Clear Float Glass (With Ref. to 6mm Thk.)**

Product Name	Dawn	Spring	Aura	Snow	Nectar	Ivory	Natura	Gold	Natura Plus
<b>Visible parameters</b>									
Light transmittance (LT) %	29	65	53	23	37	23	30	40	35
External light reflection (RLE) (%)	18	26	25	26	22	34	28	24	15
<b>Energetic parameters</b>									
Energy transmittance (ET) %	30	60	49	24	31	18	19	40	24
Energy absorbance (EA) %	55	14	34	57	54	58	54	38	50
Solar factor g	43	64	58	38	45	34	33	50	45

For 6mm Thick	Clear Vision	Clear Lite Plus	Clear Essence Plus	Clear Radiance Plus	Clear Brook Plus	Clear Platina	Excel Clear Pearl
<b>Visible parameters</b>							
Light transmittance (LT) %	44	58	72	55	36	30	40
External light reflection (RLE) (%)	25	18	20	20	40	42	18
<b>Energetic parameters</b>							
Energy transmittance (ET) %	30	37	52	35	22	18	20
Energy absorbance (EA) %	37	35	31	37	35	37	42
Solar factor g	40	47	60	45	31	28	32

### Soft Coated Tinted Glass (Bronze)

Table 12 Performance Data of Soft Coated Bronze Tinted Float Glass (With Ref. to 6mm Thk.)

Product Name	Maple	Bronze Essence							
<b>Visible parameters</b>									
Light transmittance (LT) %	33	35							
External light reflection (RLE) (%)	10	6							
<b>Energetic parameters</b>									
Energy transmittance (ET) %	38	28							
Energy absorbance (EA) %	53	62							
Solar factor g	52	45							

### Soft Coated Tinted Glass (Green)

Table 13 Performance Data of Soft Coated Green Tinted Float Glass (With Ref. to 6mm Thk.)

Product Name	Pine	Meadow	Coral	Jade	Lime	Citrus	Green Vision	Green Essence	Green Lite Plus	Green Radiance Plus
<b>Visible parameters</b>										
Light transmittance (LT) %	25	56	44	21	31	18	39	68	50	45
External light reflection (RLE) (%)	14	22	19	20	17	25	20	8	15	15
<b>Energetic parameters</b>										
Energy transmittance (ET) %	16	35	28	16	18	10	19	40	23	20
Energy absorbance (EA) %	75	49	62	73	72	77	68	55	65	67
Solar factor g	35	48	46	36	37	31	36	54	40	38

### Soft Coated Tinted Glass (Dark Blue)

Table 14 Performance Data of Soft Coated Dark Blue Tinted Float Glass (With Ref. to 6mm Thk.)

Product Name	Cove	Marine	Bay	Orchid Blue	Indigo	Blue bell	Blue Vision	Blue Essence	Blue Lite Plus	Blue Radiance plus
<b>Visible parameters</b>										
Light transmittance (LT) %	20	43	35	15	24	14	28	55	40	35
External light reflection (RLE) (%)	12	17	12	14	12	17	14	7	10	10
<b>Energetic parameters</b>										
Energy transmittance (ET) %	17	34	28	13	18	10	18	40	25	20
Energy absorbance (EA) %	74	50	63	78	73	78	68	52	65	68
Solar factor g	36	48	46	35	38	32	35	53	42	38

AIS manufactures a wide variety of other hard coated and soft coated Reflective Glass, the performance data of which can be found on: <https://www.aisglass.com/ais-glass-performance-parameters>.

### Declaration of the main products components and/or materials

The product is 100% glass CAS number 65997-17-3, EINECS number 266-046-0.

At the date of issue of this declaration, there is no “Substance of Very High Concern” (SVHC) in concentration above 0.1% by weight, and neither do their packaging, following the European REACH regulation (Registration, Evaluation, Authorization and Restriction of Chemicals).

### 3.2 Product Manufacturing

The main steps in float glass manufacturing process are:

#### 3.2.1 Batch Mixer

Mix of raw materials (silica, soda ash, lime, feldspar and dolomite) to which is added recycled glass (cullet) and other compounds depending on the desired color and properties.

#### 3.2.2 Float Glass Production

Raw materials are melted at 1550 °C in a furnace by fuel oil. Bubbles inside the glass are removed and the temperature is lowered to a level suitable for forming (1100 to 1300 °C). The molten glass is fed into a bath of molten tin. The glass floats on this flat surface and is drawn off in a ribbon. Serrated wheels, or top rolls, pull and push the glass sideways depending on the desired thickness (from 3 to 12 millimeters).

#### 3.2.3 Annealing

Since the sharp temperature change causes distortion to appear in formed glass, temperature control is carried out to cool glass slowly. The glass is lifted onto conveyor rollers and passes through a controlled cooling tunnel measuring more than 150 meters in length. Approximately 680 °C at the start of this step, the glass exits the lehr at room temperature.

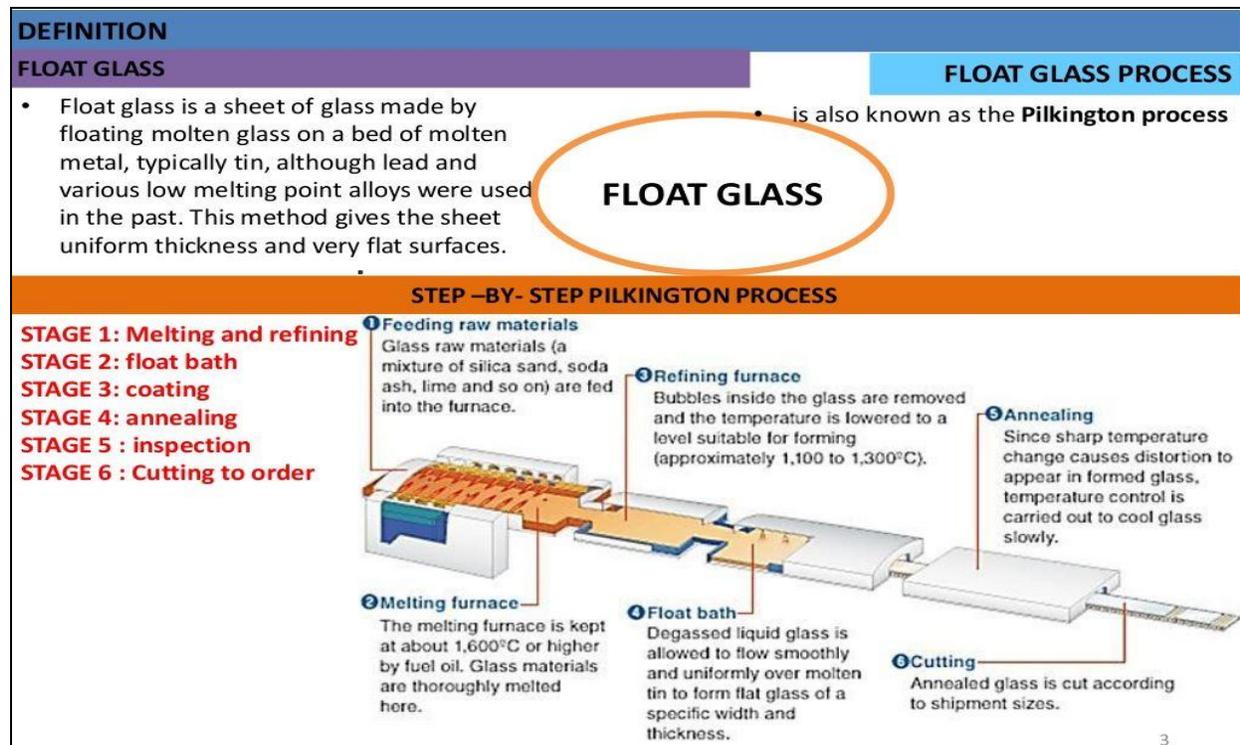


Figure 1: Manufacturing Process Flow Diagram of Float Glass

Environmental Product Declaration- Reflective Glass- Hard Coated & Soft Coated, 2018

3.2.4 Cutting and Packing

The glass is automatically cut lengthwise and crosswise. The sheets of glass are raised by vacuum cups that then place them for packing.

3.2.5 Storage and Dispatch

The glass is then stored in warehouses which are then dispatched to the corresponding locations.

Coatings can be applied either on-line (with the float glass manufacturing process) or off-line (independently of the float glass manufacturing process).

- **On-Line Coating** is a silicon based coating and is deposited onto the surface of the glass during glass production and while the glass is still in semi molten state, typically at 600-700 °C. A chemical reaction occurs between the silicon vapour and the glass surface, changing the chemical composition of the glass surface, resulting in a hard coating that strongly adheres to the glass.
- **Off-Line Coating** the glass passes through a tightly sealed pumping chamber in which the vacuum is formed. Multiple layers of metals, metal and non-metal oxides and nitrides are then applied to the glass using a magnetically enhanced cathodic sputtering method. The resultant thin and transparent coating offers thermal insulation and solar control properties.

3.3 System Boundaries

The LCA model of float glass represents a cradle-to-gate system starting from raw materials extraction and ending with the processing of flat glass (A1 to A3). The table below shows the description of the system boundary considered for conducting the LCA of float glass. The environmental impacts of all the other stages in the life cycle of average float glass are not assessed (MNA).

Table 15 Description of the system boundary (X = Included in LCA, MNA = Module Not Assessed)

Product Stage			Installation Stage		Use stage							End-of-Life Stage				Benefits beyond system boundary
Raw material supply	Transport	Manufacturing	Transport to building site	Installation into building	Use / application	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction / demolition	Transport to EoL	Waste processing for reuse, recovery or recycling	Disposal	Reuse, recovery or recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA	MNA

Table 18 summarizes those processes that are included within the system boundaries of the study.

**Table 16 Details of System Boundary Included in the Study**

Life Cycle stages	Life Cycle sub-stages	Definitions	Module
<b>Materials</b>	Primary raw materials production	Extraction, production of the raw materials such as silica, soda ash, lime, dolomite, etc.)	A1
<b>Upstream Transport</b>	Ocean Rail and Road Transport	Transport of the raw materials	A2
<b>Manufacturing</b>	Float Glass Production by mixing of raw materials and disposal of waste generated.	Manufacturing and processing of float glass, Disposal of waste generated	A3

The system boundary does not include:

- Capital equipment and maintenance of production facility
- Maintenance and operation of equipment
- Human labor
- Distribution of the product
- Use phase of the product
- Disposal phase of the product

## 4. LCA

### 4.1 Information Sources and Data Quality

It is important that data quality is in accordance with the requirements of the LCA's goal and scope. This is essential to the reliability of LCA and achievement of the intended application. The quality of the LCI data for modelling the life cycle stages have been assessed according to ISO 14044 (ISO, 2006b). Data quality is judged by its precision (measured, calculated or estimated), completeness (e.g. are there unreported emissions?), consistency (degree of uniformity of the methodology applied on a LCA serving as a data source) and representativeness (geographical, time period, technology). To cover these requirements and to ensure reliable results, first-hand industry data in combination with consistent, upstream LCA information is used. The datasets have been used in LCA-models worldwide for several years in industrial and scientific applications for internal as well as critically reviewed studies. In the process of providing these datasets, they have been cross-checked with other databases and values from industry and science. AIS provided the most accurate and representative data for cement production. For all data requirements, primary data were used where possible.

### 4.2 Estimations and Methodology

#### 4.2.1 Allocation procedures

As much as possible, allocation has been avoided by expanding the system boundaries.

#### 4.2.2 Average float glass

The average is determined based on the produced amounts of clear and tinted float glass by weight for the year April 2016 – March 2017.

#### 4.2.3 Declared unit

The declared unit for the EPD is 1 m<sup>2</sup> of reflective glass (hard coated and soft coated) for a range of thicknesses: 3 mm, 3.5 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm and 12 mm

#### 4.2.4 Impact assessment

A list of relevant impact categories and category indicators is defined and associated with the inventory data. Various environmental impacts and emissions are associated with production of float glass, from raw material production, transport of materials to manufacturing site to final glass production.

CML 2001 (April 2013) method developed by Institute of Environmental Sciences, Leiden University, Netherlands have been selected for evaluation of environmental impacts. These indicators are scientifically and technically valid.

A list of relevant impact categories and category indicators is defined and associated with the inventory data. PCR EN 15804 has been used to conduct the LCA. The PCR identifies the following LCI and LCIA.

1. Potential Environmental Impact (according with EN15804)
  - Global warming potential, GWP (100 years) (kg CO<sub>2</sub> equivalent)
  - Depletion potential of the stratospheric ozone layer, ODP (20 years) (kg CFC-11 equivalent)
  - Acidification potential of soil and water, AP (kg SO<sub>2</sub> equivalent)
  - Eutrophication potential, EP (kg PO<sub>4</sub><sup>3-</sup> equivalent)
  - Formation potential of tropospheric ozone, POCP (kg Ethene (C<sub>2</sub>H<sub>2</sub>) equivalent)
  - Abiotic depletion potential (ADP-elements) for non-fossil resources (kg Sb equivalent)
  - Abiotic depletion potential (ADP-fossil fuels) for fossil resources (MJ, net calorific value)
2. Use of Natural Resources (according with EN15804)
  - Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) (MJ, net calorific value)
  - Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) (MJ, net calorific value)
  - Use of secondary material (kg)
  - Use of renewable secondary fuels (MJ, net calorific value)
  - Use of non-renewable secondary fuels (MJ, net calorific value)
  - Use of net fresh water (m<sup>3</sup>)
3. Other Environmental Indicators
  - Components for re-use (kg)
  - Materials for recycling (kg)
  - Materials for energy recovery (kg)
  - Exported energy (MJ)
  - Dust (total dust and PM<sub>10</sub>) (kg)
  - Hazardous waste (as defined by regional directives) disposed (kg)
  - Non-hazardous waste disposed (kg)
  - Radioactive waste disposed/stored (kg)

#### 4.3 Cut Off Rules

Input and output data have been collected through detailed questionnaires which have been developed and refined. In practice, this means that, at least, all material flows going into the reflective glass production processes (inputs) higher than 1% of the total mass flow (t) or higher than 1% of the total primary energy input (MJ) are part of the system and modelled in order to calculate elementary flows. All material flows leaving the product system (outputs) accounting for more than 1% of the total mass flow is part of the system. All available inputs and outputs, even below the 1% threshold, have been considered for the LCI calculation. For hazardous and toxic materials and substances the cut-off rules do not apply.

Environmental Product Declaration- Reflective Glass- Hard Coated & Soft Coated, 2018

Secondary raw materials used in the production system is accounted adopting the following approach:

- The environmental impacts related to the ‘previous life’ is not considered.
- The processes needed to prepare the secondary raw material to the new use is considered.
- If the secondary raw material contains energy, the amount is estimated considering the gross calorific value and presented as secondary energy resource.
- If the secondary raw material does not contain energy, the quantity that enter the system is considered as secondary raw material.

**4.4 Background Data**

All relevant background datasets were taken from the GaBi-8 software database (2018) developed by thinkstep AG. To ensure comparability of results in the LCA, the basic data from the GaBi-8 database were used for fuel, energy, transportation and auxiliary materials.

**4.5 Comparability**

The EPD is established on the basis of the Product Category Rules (PCR) EN 15804 for construction products and services. According to these standards, EPDs do not compare the environmental performance of products in the construction sector. Any comparison of the declared environmental performance of products lies outside the scope of these standards and is suggested to be feasible only if all compared declarations follow equal standard provisions.

**4.6 Results**

**- Hard Coated Reflective Glass**

This section covers the environmental impacts of 1 m<sup>2</sup> of hard coated reflective glass of thicknesses: 3 mm, 3.5 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm and 12 mm respectively in the sub sections.

4.6.1 Reflective Glass (Hard Coat): 3 mm

Table 19 (a-c) shows the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 3 mm thickness.

**Table 17 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 3 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP fossil)	kg CO <sub>2</sub> -eq	9.70
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	4.76E-11
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.04
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.004
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.0019
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	5.50E-05
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	118

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 3 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	3.67

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	3.67
Non-renewable primary energy as energy carrier	MJ	119
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	119
Use of secondary material	kg	3.67
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.021

 (c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 3 mm

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.22
Hazardous waste	kg	3.00E-07
Radioactive waste	kg	2.7E-04

## 4.6.2 Reflective Glass (Hard Coat): 3.5 mm

Table 20 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 3.5 mm thickness.

 Table 18 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 3.5 mm

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	11.3
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	5.56E-11
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.047
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.0046
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.0022
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	6.42E-05
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	138

 (b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 3.5 mm

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	4.27
Renewable primary energy resources as material utilization	MJ	0

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Total use of renewable primary energy resources	MJ	4.27
Non-renewable primary energy as energy carrier	MJ	138
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	138
Use of secondary material	kg	3.7
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.024

 (c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 3.5 mm

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.26
Hazardous waste	kg	3.5E-07
Radioactive waste	kg	3.2E-04

## 4.6.3 Reflective Glass (Hard Coat): 4 mm

Table 21 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 4 mm thickness.

 Table 19 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 4 mm

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	12.9
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	6.35E-11
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.054
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.0052
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.0025
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	7.30E-05
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	157

 (b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 4 mm

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	4.88
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	4.88

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Non-renewable primary energy as energy carrier	MJ	158
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	158
Use of secondary material	kg	4.20
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.028

 (c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 4 mm

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.30
Hazardous waste	kg	4.00E-07
Radioactive waste	kg	3.60E-04

## 4.6.4 Reflective Glass (Hard Coat): 5 mm

Table 22 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 5 mm thickness.

 Table 20 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 5 mm

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	16.2
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	8.00E-11
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.067
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.0066
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.003
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	9.16E-05
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	197

 (b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 5 mm

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	6.10
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	6.10
Non-renewable primary energy as energy carrier	MJ	198

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	198
Use of secondary material	kg	5.25
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.035

 (c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 5 mm

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.37
Hazardous waste	kg	5.01E-07
Radioactive waste	kg	4.50E-04

## 4.6.5 Reflective Glass (Hard Coat): 6 mm

Table 23 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 6 mm thickness.

 Table 21 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 6 mm

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	19.4
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	9.53E-11
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.08
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.008
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.0038
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	1.10E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	236

 (b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 6 mm

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	7.30
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	7.30
Non-renewable primary energy as energy carrier	MJ	237
Non-renewable primary energy as material utilization	MJ	0

Environmental Product Declaration- Reflective Glass- Hard Coated & Soft Coated, 2018

Total use of non-renewable primary energy resources	MJ	237
Use of secondary material	kg	6.30
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.042

(c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 6 mm

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.44
Hazardous waste	kg	6.01E-07
Radioactive waste	kg	5.40E-04

4.6.6 Reflective Glass (Hard Coat): 8 mm

Table 24 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 8 mm thickness.

Table 22 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 8 mm

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	25.9
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	1.27E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.11
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.01
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.005
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	1.50E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	315

(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 8 mm

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	9.76
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	9.76
Non-renewable primary energy as energy carrier	MJ	317
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy	MJ	317

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

<b>resources</b>		
<b>Use of secondary material</b>	kg	8.4
<b>Use of renewable secondary fuels</b>	MJ	0
<b>Use of non-renewable secondary fuels</b>	MJ	0
<b>Use of net fresh water</b>	m <sup>3</sup>	0.056

 (c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 8 mm

Parameter	Unit	Module A1-A3
<b>Non-hazardous waste</b>	kg	0.59
<b>Hazardous waste</b>	kg	8.0E-07
<b>Radioactive waste</b>	kg	7.2E-04

## 4.6.7 Reflective Glass (Hard Coat): 10 mm

Table 25 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 10 mm thickness.

 Table 23 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 10 mm

Parameter	Unit	Module A1-A3
<b>Global warming potential (GWP)</b>	kg CO <sub>2</sub> -eq	32.4
<b>Depletion potential of the stratospheric ozone layer (ODP)</b>	kg CFC 11-eq	1.58E-10
<b>Acidification potential of land and water (AP)</b>	kg SO <sub>2</sub> -eq	0.135
<b>Eutrophication potential (EP)</b>	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.0132
<b>Formation potential of tropospheric ozone photochemical oxidants (POCP)</b>	kg ethene-eq	0.006
<b>Abiotic depletion potential for non-fossil resources (ADP elements)</b>	kg Sb-eq	1.83E-04
<b>Abiotic depletion potential for fossil resources (ADP fossil fuels)</b>	MJ	393

 (b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 10 mm

Parameter	Unit	Module A1-A3
<b>Renewable primary energy as energy carrier</b>	MJ	12.2
<b>Renewable primary energy resources as material utilization</b>	MJ	0
<b>Total use of renewable primary energy resources</b>	MJ	12.2
<b>Non-renewable primary energy as energy carrier</b>	MJ	396
<b>Non-renewable primary energy as material utilization</b>	MJ	0
<b>Total use of non-renewable primary energy resources</b>	MJ	396
<b>Use of secondary material</b>	kg	10.5

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.07

 (c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 10 mm

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.74
Hazardous waste	kg	1.00E-06
Radioactive waste	kg	9.00E-04

## 4.6.8 Reflective Glass (Hard Coat): 12 mm

Table 26 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (hard coat) product for 12 mm thickness.

 Table 24 (a) LCIA for 1 m<sup>2</sup> of hard coated reflective glass of thickness 12 mm

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	38.8
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	1.90E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.163
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.016
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.0076
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	2.20E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	472

 (b) Use of Natural Resources analysis for 1 m<sup>2</sup> of hard coated reflective glass of thickness 12 mm

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	14.6
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	14.6
Non-renewable primary energy as energy carrier	MJ	475
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	475
Use of secondary material	kg	12.6
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Use of net fresh water	m <sup>3</sup>	0.084
------------------------	----------------	-------

 (c) Waste Category for 1 m<sup>2</sup> of hard coated reflective glass of thickness 12 mm

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.89
Hazardous waste	kg	1.2E-06
Radioactive waste	kg	0.0011

## - Soft Coated Reflective Glass

This section covers the environmental impacts of 1 m<sup>2</sup> of soft coated reflective glass of thicknesses: 3 mm, 3.5 mm, 4 mm, 5 mm, 6 mm, 8 mm, 10 mm and 12 mm respectively in the sub sections.

## 4.6.9 Reflective Glass (Soft Coat): 3 mm

Table 27 (a-c) shows the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 3 mm thickness.

 Table 25 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 3 mm

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	15.0
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	1.63E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.12
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.0086
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.0057
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	7.65E-05
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	173

 (b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 3 mm

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	10.3
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	10.3
Non-renewable primary energy as energy carrier	MJ	176
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	176
Use of secondary material	kg	3.67

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.055

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 3 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.24
Hazardous waste	kg	3.28E-07
Radioactive waste	kg	9.50E-04

## 4.6.10 Reflective Glass (Soft Coat): 3.5 mm

Table 28 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 3.5 mm thickness.

**Table 26 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 3.5 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	17.5
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	1.90E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.14
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.01
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.007
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	8.92E-05
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	202

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 3.5 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	12
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	12
Non-renewable primary energy as energy carrier	MJ	205
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	205
Use of secondary material	kg	3.7
Use of renewable secondary fuels	MJ	0

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.064

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 3.5 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.28
Hazardous waste	kg	3.83E-07
Radioactive waste	kg	0.0011

## 4.6.11 Reflective Glass (Soft Coat): 4 mm

Table 29 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 4 mm thickness.

**Table 27 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 4 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	19.9
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	2.17E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.16
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.012
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.007
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	1.02E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	231

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 4 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	13.7
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	13.7
Non-renewable primary energy as energy carrier	MJ	234
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	234
Use of secondary material	kg	4.20
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0

Use of net fresh water	m <sup>3</sup>	0.074
------------------------	----------------	-------

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 4 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.32
Hazardous waste	kg	4.38E-07
Radioactive waste	kg	1.26E-03

4.6.12 Reflective Glass (Soft Coat): 5 mm

Table 30 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 5 mm thickness.

**Table 28 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 5 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	24.9
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	2.7 E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.202
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.014
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.009
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	1.20E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	289

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 5 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	17.2
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	17.2
Non-renewable primary energy as energy carrier	MJ	293
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	293
Use of secondary material	kg	5.25
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.092

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 5 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.40
Hazardous waste	kg	5.50E-07
Radioactive waste	kg	1.58E-03

4.6.13 Reflective Glass (Soft Coat): 6 mm

Table 31 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 6 mm thickness.

**Table 29 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 6 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	29.9
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	3.26E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.24
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.017
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.012
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	1.50E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	346

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 6 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	20.6
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	20.6
Non-renewable primary energy as energy carrier	MJ	351
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	351
Use of secondary material	kg	6.3
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.11

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 6 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.48
Hazardous waste	kg	6.57E-07
Radioactive waste	kg	1.80E-03

## 4.6.14 Reflective Glass (Soft Coat): 8 mm

Table 32 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 8 mm thickness.

**Table 30 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 8 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	39.9
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	4.34E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.32
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.02
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.015
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	2.0E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	462

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 8 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	27.5
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	27.5
Non-renewable primary energy as energy carrier	MJ	468
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	468
Use of secondary material	kg	8.40
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.14

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 8 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.64
Hazardous waste	kg	8.70E-07
Radioactive waste	kg	2.50E-03

## 4.6.15 Reflective Glass (Soft Coat): 10 mm

Table 33 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 10 mm thickness.

**Table 31 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 10 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	49.9
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	5.4E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.41
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.03
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.019
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	2.50E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	577

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 10 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	34.3
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	34.3
Non-renewable primary energy as energy carrier	MJ	585
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	585
Use of secondary material	kg	10.5
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.18

## Environmental Product Declaration- Reflective Glass- Hard Coated &amp; Soft Coated, 2018

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 10 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.81
Hazardous waste	kg	1.09E-06
Radioactive waste	kg	3.10E-03

## 4.6.16 Reflective Glass (Soft Coat): 12 mm

Table 34 (a-c) show the life cycle environmental impacts for 1 m<sup>2</sup> of Reflective Glass (soft coat) product for 12 mm thickness.

**Table 32 (a) LCIA for 1 m<sup>2</sup> of soft coated reflective glass of thickness 12 mm**

Parameter	Unit	Module A1-A3
Global warming potential (GWP)	kg CO <sub>2</sub> -eq	59.8
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC 11-eq	6.52E-10
Acidification potential of land and water (AP)	kg SO <sub>2</sub> -eq	0.48
Eutrophication potential (EP)	kg PO <sub>4</sub> <sup>3-</sup> -eq	0.034
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg ethene-eq	0.023
Abiotic depletion potential for non-fossil resources (ADP elements)	kg Sb-eq	3.00E-04
Abiotic depletion potential for fossil resources (ADP fossil fuels)	MJ	693

**(b) Use of Natural Resources analysis for 1 m<sup>2</sup> of soft coated reflective glass of thickness 12 mm**

Parameter	Unit	Module A1-A3
Renewable primary energy as energy carrier	MJ	41.2
Renewable primary energy resources as material utilization	MJ	0
Total use of renewable primary energy resources	MJ	41.2
Non-renewable primary energy as energy carrier	MJ	703
Non-renewable primary energy as material utilization	MJ	0
Total use of non-renewable primary energy resources	MJ	703
Use of secondary material	kg	12.6
Use of renewable secondary fuels	MJ	0
Use of non-renewable secondary fuels	MJ	0
Use of net fresh water	m <sup>3</sup>	0.22

**(c) Waste Category for 1 m<sup>2</sup> of soft coated reflective glass of thickness 12 mm**

Parameter	Unit	Module A1-A3
Non-hazardous waste	kg	0.96
Hazardous waste	kg	1.31E-06
Radioactive waste	kg	0.0038

#### 4.7 Interpretation

1 m<sup>2</sup> of reflective glass with 10 mm thickness is used for interpreting the LCIA results in this section. Other thicknesses are on the basis of relative mass of the reflective glass for the respective thickness and the same interpretation will apply. The LCIA interpretations of 10 mm thickness reflective glass are as given below:-

##### 4.7.1 Hard Coated Reflective Glass

**Table 33 Interpretation of most significant contributors to life cycle parameters for 1 m<sup>2</sup> of hard coated reflective glass of thickness 10 mm**

Parameter	Most significant contributor
ADP elements	Abiotic depletion potential (ADP element) is 1.83E-04 Kg Sb-Equiv. of which 99.9% contribution is from the production of float glass.
ADP Fossil	Abiotic depletion potential for fossil resources (ADP fossil) is 393.34 MJ of which 99% contribution is from the production of float glass, and 1% from electricity consumption by the CVD coating machine,
Acidification Potential	Acidification Potential is 0.135 Kg SO <sub>2</sub> -Equiv. of which 97.8% contribution is from the production of float glass, 0.6% from the CVD coating material and 1.3% from the electricity consumption by the CVD coater.
Eutrophication Potential	Eutrophication Potential is 0.013 kg Phosphate-Equiv. of which 99% contribution is from the production of float glass and 0.6% from the electricity consumption by the CVD coater.
Global Warming Potential	Global Warming Potential is 32.37 kg CO <sub>2</sub> -Equiv., of which 99.3% contribution is from the production of float glass and 0.5% from the electricity consumption by the CVD coater.
Ozone Layer Depletion Potential	Ozone Layer Depletion Potential is 1.58E-10 kg CFC 11-Equiv. of which 97.5% contribution is from the production of float glass and 2.15% from the electricity consumption by the CVD coater.
Photochemical Ozone Creation Potential	Photochemical Ozone Creation Potential is 0.006 kg Ethene-Equiv. of which 98.2% contribution is from the production of float glass and 1.3% from the electricity consumption by the CVD coater.
Water Demand	The net fresh water used is 0.069 m <sup>3</sup>
Waste Generation	The total amount of hazardous waste generated is 1.0E-06 kg and the non-hazardous waste is 0.74 kg. The amount of radioactive waste disposed is 9.0E-04 kg. Most of the hazardous and non-hazardous waste is contributed by the production of float glass (98.8% and 98% respectively). A very small amount is contributed from packaging of the glass. (1.2%)

#### 4.7.2 Soft Coated Reflective Glass

**Table 34 Interpretation of most significant contributors to life cycle parameters for 1 m<sup>2</sup> of soft coated reflective glass of thickness 10 mm**

Parameter	Most significant contributor
ADP elements	Abiotic depletion potential (ADP element) is 2.5 E-04 Kg Sb-Equiv. of which 69% contribution is from the production of float glass, 28.6% from the production of silver cathode and 2.2% from silica gel desiccant.
ADP Fossil	Abiotic depletion potential for fossil resources (ADP fossil) is 577.4 MJ of which 64% contribution is from the production of float glass, 28.4% from energy production and 5.6% from transport of raw materials.
Acidification Potential	Acidification Potential is 0.40 Kg SO <sub>2</sub> -Equiv. of which 31% contribution is from the production of float glass, 48.6% from energy production and 18% from transport of raw materials.
Eutrophication Potential	Eutrophication Potential is 0.3 kg Phosphate-Equiv. of which 43% contribution is from the production of float glass, 30% from energy production and 26.3% from transport of raw materials.
Global Warming Potential	Global Warming Potential is 49.9 kg CO <sub>2</sub> -Equiv., of which 61.7% contribution is from the production of float glass, 32% from energy production and 5.3% from transport of raw materials.
Ozone Layer Depletion Potential	Ozone Layer Depletion Potential is 5.43E-10 kg CFC 11-Equiv. of which 27% contribution is from the production of float glass and 72% from energy production.
Photochemical Ozone Creation Potential	Photochemical Ozone Creation Potential is 0.019 kg Ethene-Equiv. of which 31% contribution is from the production of float glass, 48% from energy production and 19% from transport of raw materials.
Water Demand	The net fresh water used is 0.18 m <sup>3</sup>
Waste Generation	The total amount of hazardous waste generated is 1.10E-06 kg and the non-hazardous waste is 0.81 kg. The amount of radioactive waste disposed is 3.1E-03 kg. Most of the hazardous and non-hazardous waste is contributed by the production of float glass (86% and 85% respectively) and about 10% contribution from energy production.

## 5. Other Environmental Information

The constituent materials used within our products are responsibly sourced and we apply the principles of Sustainable Development and of Environmental Stewardship as a standard business practice in our operations. Protecting the environment by preserving non-renewable natural resources, increasing energy efficiency, reducing the environmental emissions, limiting the impact of materials transportation to and from our operations is part of our way in doing business.

## 6. References

- EN 15804:2012, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- GABI 8: 2017. thinkstep AG; GaBi 8: Software-System and Database for Life Cycle Engineering. Copyright. Leinfelden, Echterdingen, 1992-2017.
- ISO 14020:2001 Environmental labels and declarations - General principles
- ISO 14025:2006 Environmental labels and declarations - Type III environmental declarations - Principles and procedures
- ISO 14040:2006 Environmental management - Life cycle assessment - Principles and framework
- ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines
- Product Category Rules PCR 2012:01 Construction products and construction services, version 2.2 in compliance with EN 15804