

we-ef



Environmental Product Declaration

In accordance with ISO 14025
and EN 15804+A1 for:
RFL500-SE SERIES
WE-EF LEUCHTEN GmbH



Programme: The International EPD® System, www.environdec.com

Programme operator: EPD International AB

EPD registration number: S-P-02408

Version: 1.1

Publication date: 2021-01-25

Version date: 2021-04-19

Valid until: 2026-01-25


Geographical scope of EPD: Germany

Life Cycle Assessment

WE-EF was one of the first organisations in the lighting industry to provide EPDs (Environmental Product Declarations) in accordance with ISO 14025 and EN 15804 standards. These EPDs entail detailed documentation on the environmental footprint of our outdoor luminaires over all phases of their life cycle. To compile the required information, we collaborate closely with external specialists in life cycle analysis.


EPDs are product specific data sheets that contain verifiable and easily comparable information on the environmental impact of any given product. They document this impact not only for the time in which the product is actively used, but across its entire life cycle, from raw material extraction to recycling. For investors, operators and designers who care for the sustainability of their projects, this information is vital for sourcing decisions.

Prime concern of this life cycle assessment are luminaires for street and area lighting. The EPDs for these luminaires as well as detailed additional information and environmental performance statements are available online at our website.

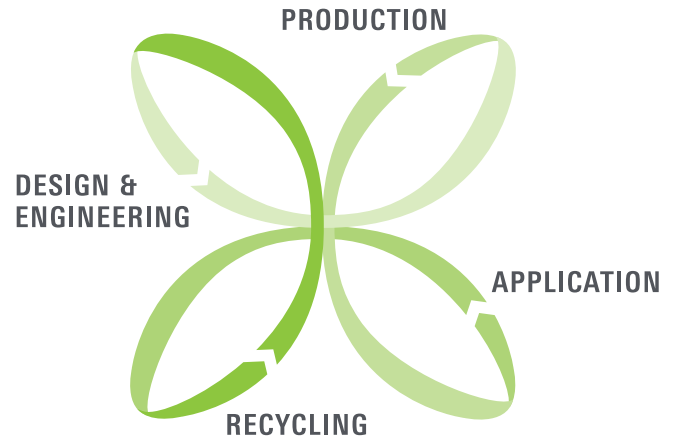


WE-EF consider the entire process of a luminaires design life as a continuous cycle. Each of the four major processes (Design and Engineering, Production, Application and Recycling) has a role in responsible environmental management, from reducing energy consumption and material inputs to controlling unnecessary light pollution. It is the Total Cost of Ownership.

Life Assessment Cycle quantifies the potential lighting in five different areas




Ozone layer

Damage to the protective ozone layer in the atmosphere



Breathing air

Smog




Global Warming

The emission of green house gas



Eco Systems

The acidification of water and soil



Non-renewable energy sources

The depletion of non-renewable energy resources

WE-EF and the environment

WE-EF recognises the importance of good environmental practices. Our entire operation from product design through to the production process and subsequent product application is based on the principle of environmental protection and the most effective use of resources. The most recent environmental legislation is strictly adhered to.

Our most significant contribution to the environment is the creation of products that are engineered to endure, essentially minimising the need to replace or recycle them for many years.


The longevity of our products is a major asset for our customers — and, at the same time, a significant contribution to the protection of our environment: Durable products need to be replaced and recycled far less often, saving energy and resources.



Franklin Square
Hobart (AU)

CONTENTS

Product Overview	1
Design and Engineering	2
Production	6
Application	10
Recycling	11
Product Information	12
System Boundaries	15
LCA Scenario and Additional Technical Information	18
▪ Environmental Performance – RFL540-SE	21
▪ Environmental Performance – RFL530-SE	22
References	23
General Information	24

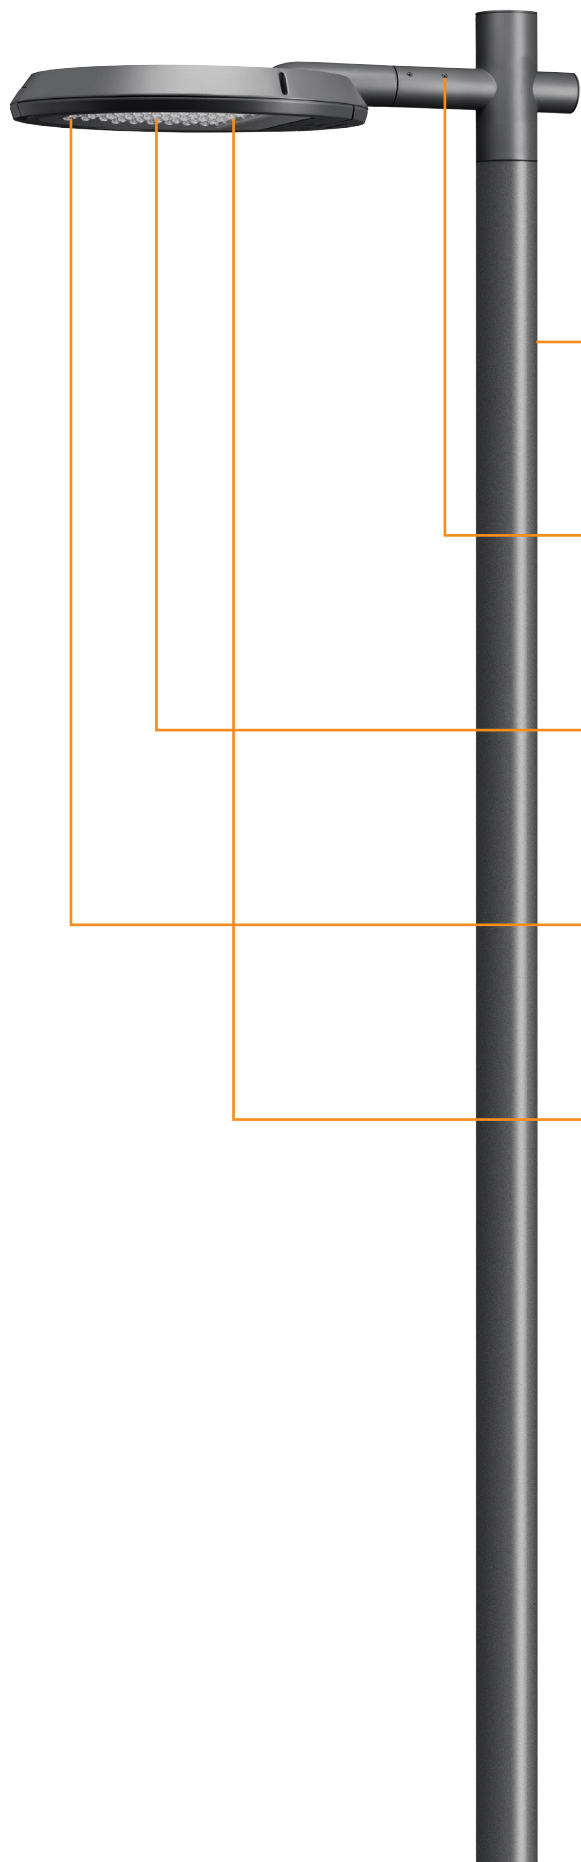

Marine-grade, all-aluminium construction

- Die-cast aluminium alloy luminaire body
- Extruded aluminium alloy pole section



FS Factory-sealed

Luminaire does not need to be opened during installation. This unique feature is found in the majority of WE-EF's LED luminaires that consequently do not need to be opened during installation. A contractor's job has never been faster, more economical and straightforward.

5CE Superior Corrosion Protection

Five Critical Elements provide outstanding and long-lasting anti-corrosion properties



PCS Hardware

- Austenitic stainless steel
- Tough, impregnated polymer coating
- Non-metallic barrier, protects against galvanic corrosion



IOS® Innovative Optical System

- CAD-optimised for superior illumination and glare control
- Dark sky compliant




Main Lens

Non-reflecting safety glass, hinged


OLC® One LED Concept

Lens system follow the approach of the 'multi-layer' principle. These layers result in a uniform and efficient illumination

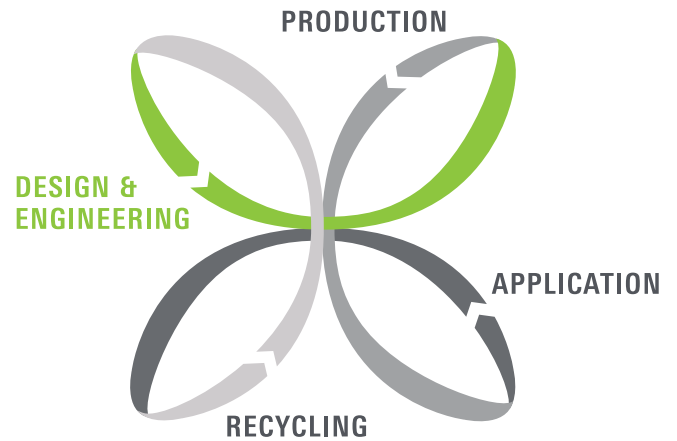

The timeless design of WE-EF luminaires is a reflection of their longevity. The way we see it, environmentally friendly engineering that accepts and masters the challenges of our times involves selecting materials and processes according to ecological criteria, high IP protection classes, efficient thermal management and IOS® Innovative Optical Systems. The development of high-quality, efficient reflector and lens technologies meeting these standards – IOS® – is one of WE-EF's core competences.

Meeting international lighting and safety standards comes as naturally to our luminaires as matching the requirements of the Dark Sky organisations. It is one of the reasons why we constantly invest in research and development.

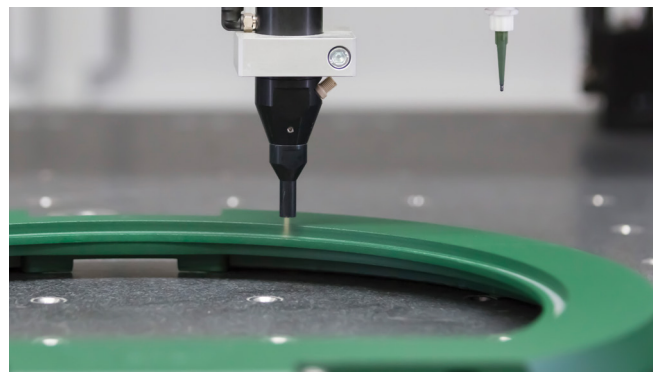

Lighting Performance



IOS® Innovative Optical System



IOS® is a complete system that provides solutions. It applies across the WE-EF range of luminaires.


In-house CAD design of lenses

- Delivers tightly controlled light distribution
- High efficiency
- Minimum light spill outside the field angle

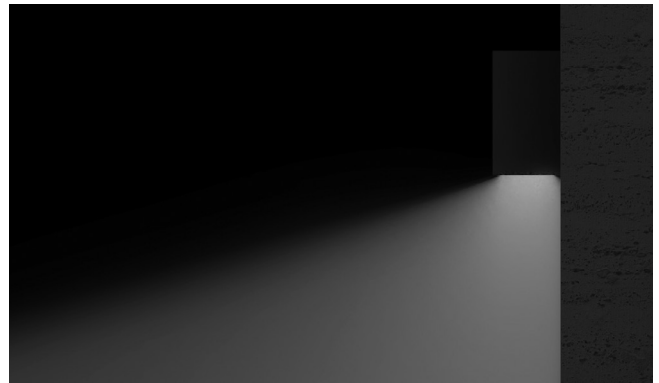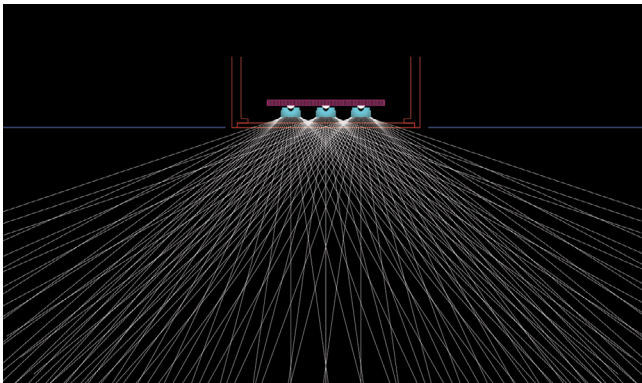

High photometric performance, beam efficiency and control

- Street and area lighting features full cut-off light distribution
- Zero light emission above 90° horizontal
- Solutions to light trespass and dark sky concerns
- Strict control in 80° – 90° zone

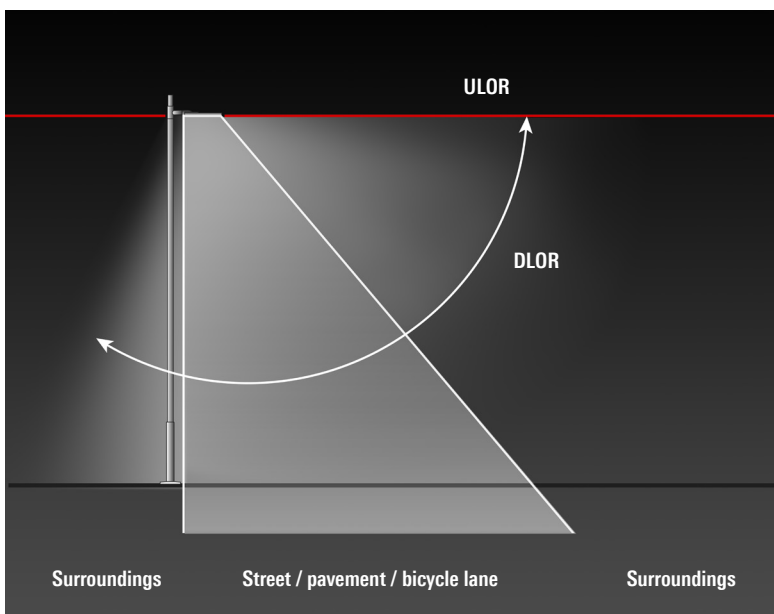


ULOR: The main purpose of an optical system is to direct light onto a specified target surface. Particularly in street lighting applications, any amount of light that is emitted above the horizontal, must be considered not merely as being wasteful, but equally so as polluting the night sky.

The Upward Light Output Ratio (ULOR) is a measure of how much light escapes from a luminaire into the sky. Obviously, a ULOR of zero percent is desirable. The better the optical system, the lower the burden on our environment.


IOS® Innovative Optical System

IOS® optics for street and area lighting applications currently comprise 11 distinctly different versions for distinctly different applications and counting. Below are some of the common light distributions used in street and area lighting.

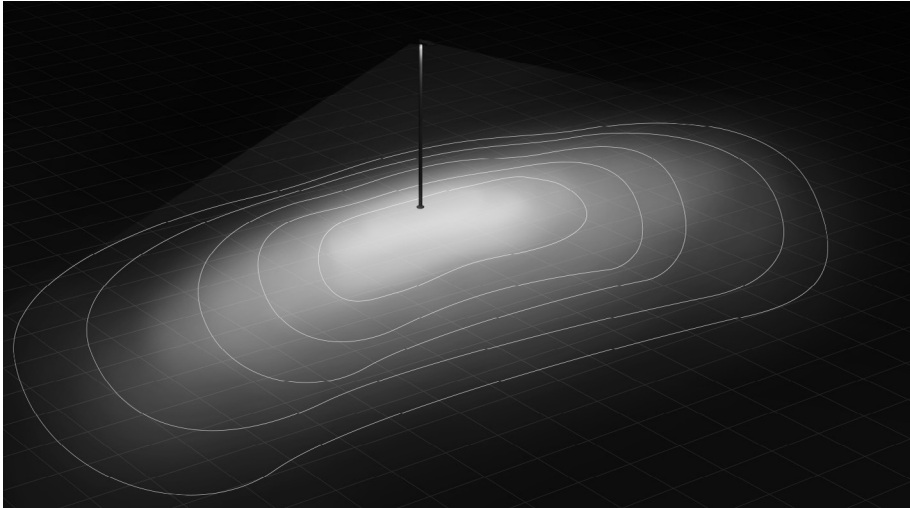


[S70] Streetlighting

Optimised for illuminance-based street lighting applications (maximum spacing between luminaires).

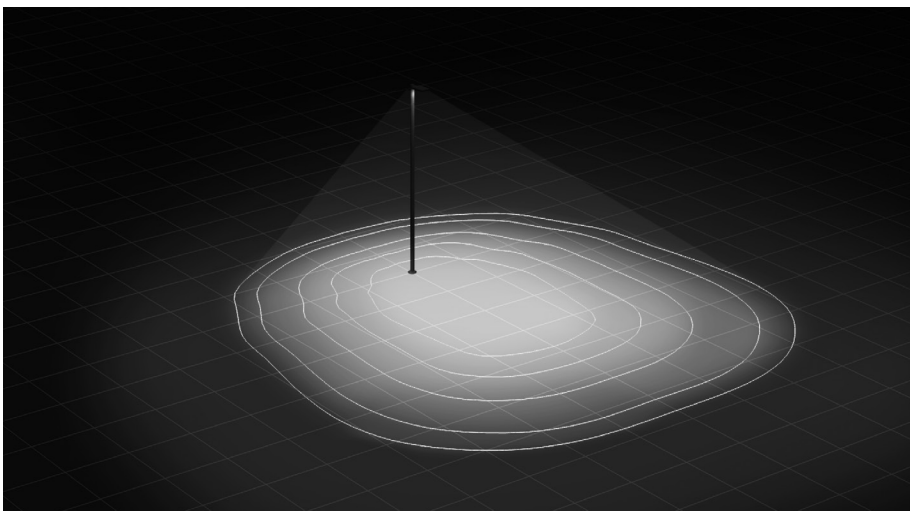

[A60] Asymmetric 'forward throw'

Particularly suitable for area lighting such as car parks etc.

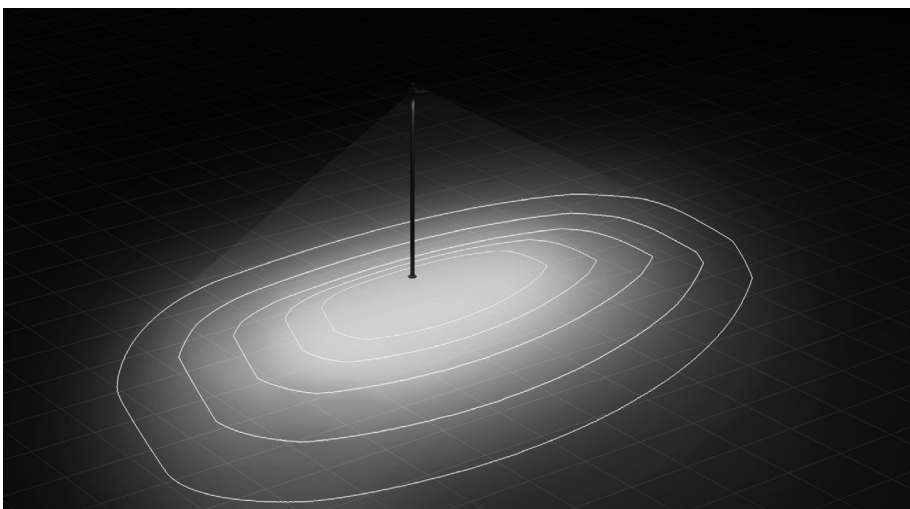


[R65] Rectangular 'side throw'

Developed for area lighting applications where a combination of side and forward throw of light is required.


OLC® One LED Concept



- CAD design lenses set to aim in the same direction
- In case of LED failure, light levels drop however uniformity remains
- Replaceable LEDs and PCBs in case of failure and upgrade

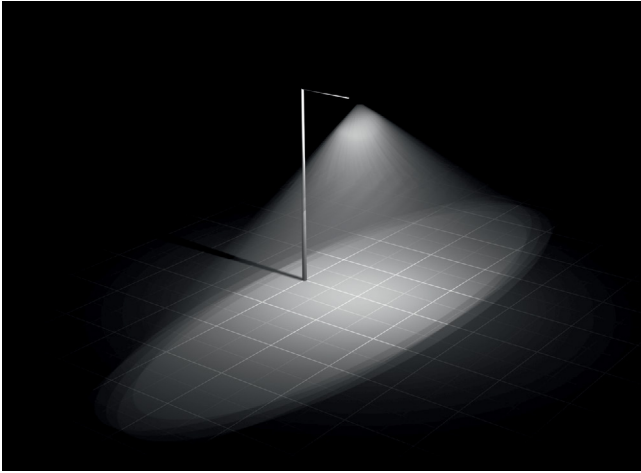


WE-EF's multi-layer technique – 100% light

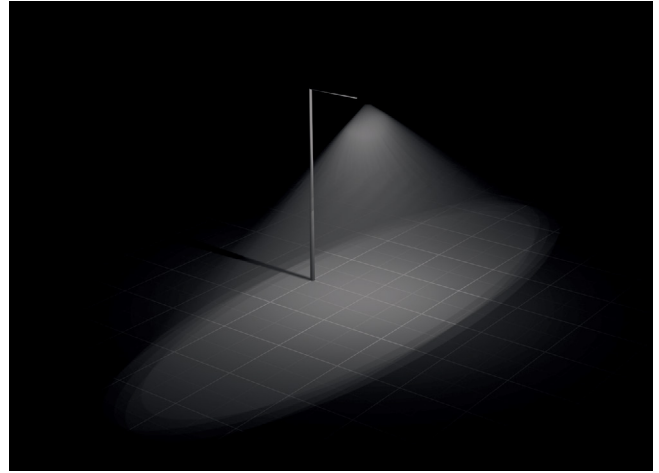

WE-EF's multi-layer technique – 70%

PRODUCTION

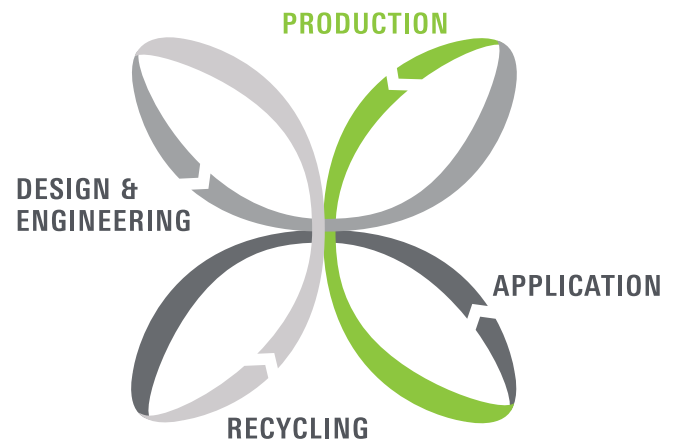


"Made by WE-EF" is more than just a phrase – it is the summation of the philosophy behind our high production depth. Our means of manufacturing range from tool-making for die-casting and injection moulding equipment to aluminium die-casting, CNC production, CNC sheet metal working, powder coating and pole production to pre- and end-assembly.



5CE Superior Corrosion Protection



A decisive quality feature for exterior luminaires is their resistance to corrosion. Outstanding and long-lasting anti-corrosion properties can only be achieved by a comprehensive, integrated approach. The result of many years of research and development, hands-on testing and experience, **WE-EF's unique 5CE system encompasses five critical elements:**



Substrate


A marine-grade, low copper content aluminium alloy is used for all WE-EF above ground luminaires.

Conversion Coating

The multi-step pre-treatment and conversion coating process includes degreasing, deoxidising, etching and depending on product, non-hazardous trivalent chromium or zirconium conversion coating. Both are considered the most effective conversion coats available for aluminium substrates.

Powder

WE-EF uses special UV-stabilised, architectural grade polyester powder, which is electrostatically bonded (60-100 µm) and oven cured at ~ 200°C. The grade of polyester powder applied is based on saturated polyester resins.

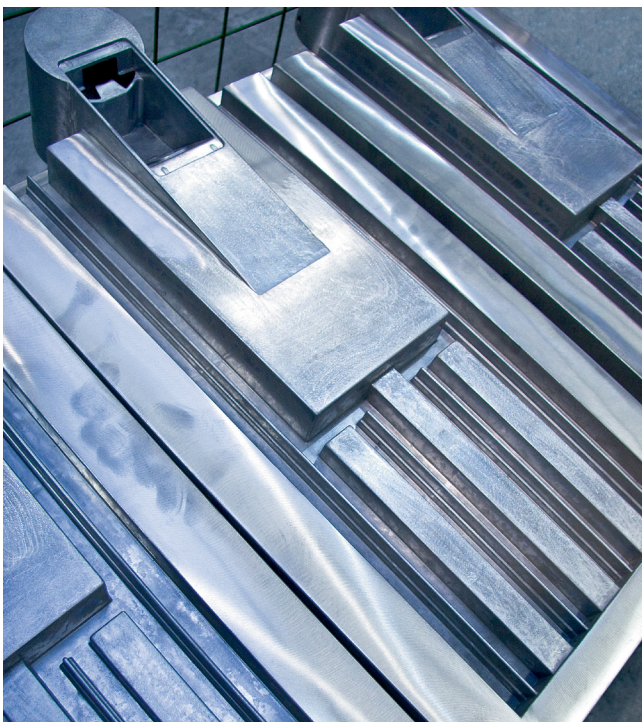


5CE Superior Corrosion Protection



+Primer



For installations where corrosion protection over and above the 5CE system is required,

5CE + Primer introduces an additional element to the process:



Primer

Immediately after conversion coating, a specially formulated 'intercoat' bonding, epoxy primer is electrostatically bonded (80-100 µm), and initially semi-cured in a 180°C oven. Following the subsequent application of the polyester powder top coat, full curing and essential 'intercoat' bond is achieved at 200°C. Top coat and primer are perfectly merged. The 5CE + Primer anti-corrosion technology is available on request for most luminaires from the WE-EF range.

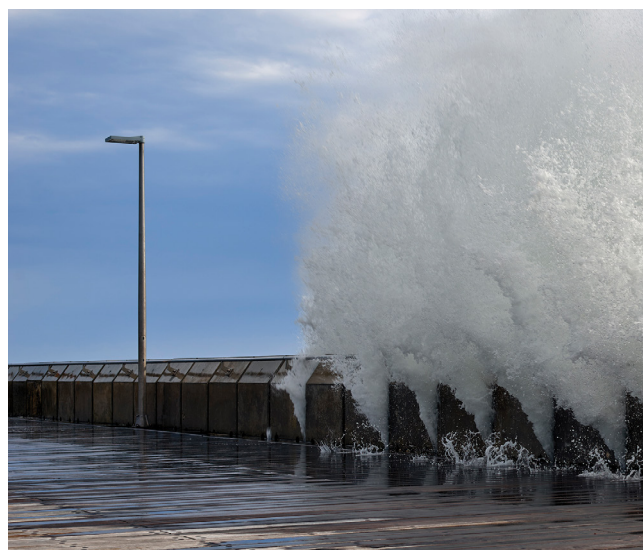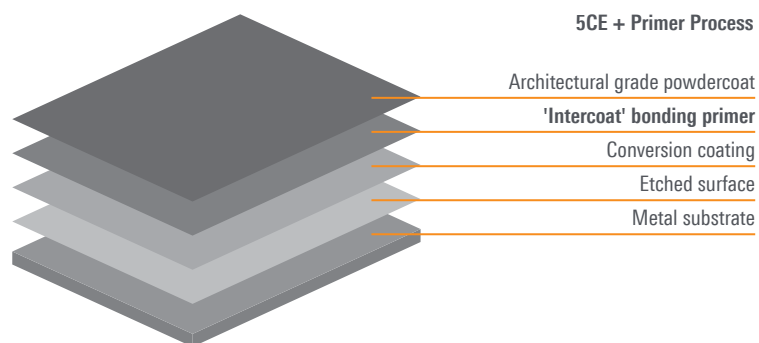


5CE tested to withstand any environment

PCS Hardware




In the context of 5CE, WE-EF only uses hardware made from austenitic stainless steel, and additionally sealed with a tough, impregnated polymer coat that fulfills two functions:

- Reduced friction between male and female thread causes tighter fit between connected parts.
- Non-metallic barrier between the two metals, aluminium and steel, prevents galvanic corrosion that otherwise occurs when metals of dissimilar electro-negativities are in contact.

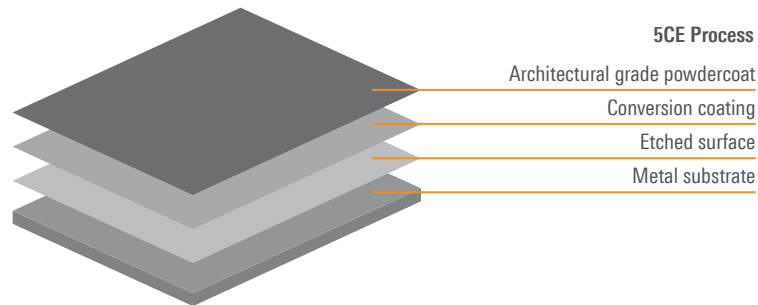


Process Control

All materials and production steps at WE-EF are part of a tightly controlled process under ISO 9001 quality assurance. It includes ongoing spectrometer analysis of aluminium alloy used, daily checks of chemical concentration in the pre-treatment phase, quality control checks on finished parts, up to 3,000 hours salt spray exposure tests etc.

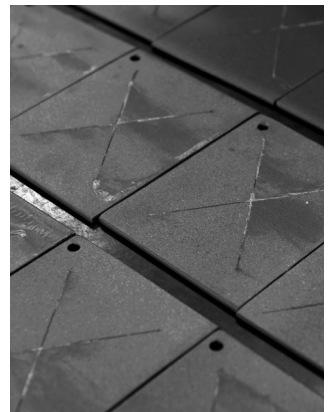

Salt spray testing

APPLICATION

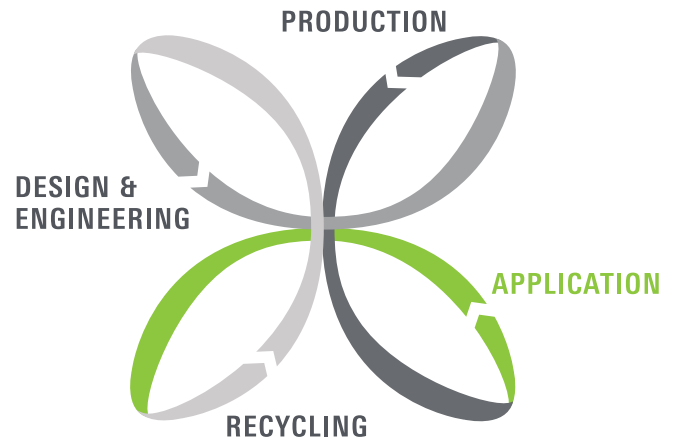

Each lighting project will have its unique characteristics and accordingly its challenges. Achieving a desired outcome balanced against the demands of environmental protection, lighting standards, public health and safety, and budgets can complicate the lighting design process.


WE-EF encourages a collaborative approach on lighting projects as a way to find the solutions that work.

By using innovative light sources in combination with appropriately adapted optics, we achieve the optimum product characteristics for any given application.



Franklin Square
Hobart (AU)


RECYCLING

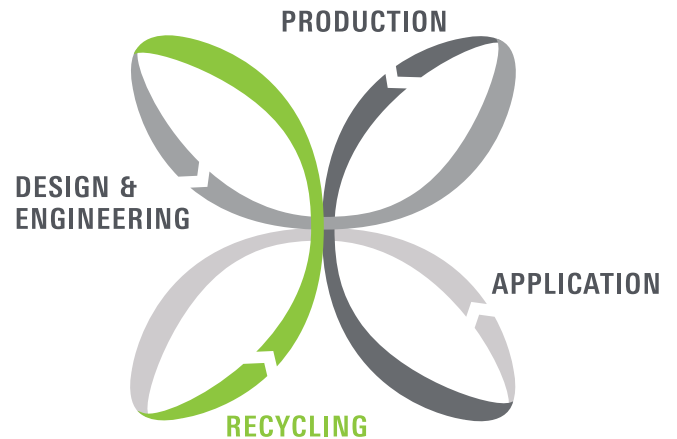

We began with an aluminium substrate that was sourced from 90% authentic, refined, recycled aluminium. At end of life approximately 90% of a WE-EF luminaire is recyclable, based on weight. Materials that can be recycled from the luminaire are as follows

- Aluminium
- Plastic Material
- Galvanised Sheet Metal

Our luminaire housings are made of high-grade, recycled aluminium alloy that can be recycled repeatedly without loss of quality. All packaging material used by WE-EF are also fully recyclable and contain no dangerous chemicals. Compliance with WEEE and RHoS also ensure latest standards are adhered to. WE-EF are also members of Interseroh, who handle the recycling of all packaging material.

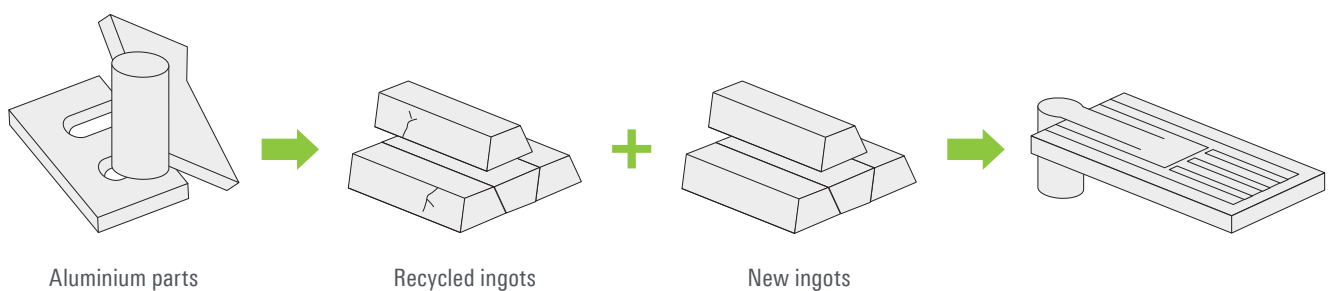

Products covered by EPD

This EPD is for the RFL540-SE and RFL530-SE, which are pole mounted luminaires with street lighting distributions.

The following luminaires are IP66 classification with IK07 rating.

Luminaire housing:	Marine-grade, die-cast aluminium alloy
Corrosion protection:	5CE, including PCS hardware
Driver:	Integral EC electronic converter in thermally-shielded compartment
Main lens:	Non-reflecting safety glass, hinged
Gasketing:	Silicone CCG® Controlled Compression Gasket
Optics:	IOS® Innovative Optical System CAD-optimised for superior illumination and glare control OLC® One LED Concept
Installation:	FS Factory-sealed luminaire does not need to be opened during installation

Maximum spacing for streetlighting applications depends on wattage and light distribution: 5.5 to 9 times the mounting height.



Front de mer
Mers-les-Bains (FR)

Table 1: Industry classification

Product	Classification	Code	Category
RFL540-SE RFL530-SE	UN CPC Ver.2.1	46539	Other electric lamps and lighting fittings (including lamps and lighting fittings of a kind used for lighting public open spaces or thoroughfares)
	EN 13201	ME3-ME6	Main and minor road lighting, class S1-S6

Table 2: Product specifications

Product	Mass [kg]	Max Wattage [W]	Electricity Consumption [kWh/y]	Colour Temperature [K]	Luminous Efficacy [lm/W]
RFL540-SE	15.98	162	473.04	4000	119
RFL530-SE	10.55	81	236.52	4000	119

Declared unit & reference service life

The declared unit for the EPD is one luminaire, installed in place as a street light and operational for 20 years (73,000 hours) in Germany. The reference service life of the product is 20 years.

Rated service life LxBy (h): The number of hours after which: Requirement L90B10 – 90,000 h means that after 90,000 hours the group of LED luminaires in question must still provide 90% of the initial luminous flux, whereby 10% of the LED luminaires in question are permitted to provide less than 90% of the initial luminous flux.



Content declaration

The primary materials and components in the products are provided below. The product does not contain any harmful substances and does not produce harmful emissions in use. Packaging materials are a cardboard folding box (1.45 kg) and slotted plate (0.05 kg) with expanded polystyrene (0.05 kg) corners.

Table 3: Content declaration (kg)

Module	Component	RFL540-SE	RFL530-SE
Main body	Aluminium frame	2.20	1.65
	Aluminium housing	8.19	5.00
	Aluminium cover plate	0.0506	0.0506
	Steel chassis	0.400	0.400
	Holder plate (steel)	0.00655	0.00655
	Silicone seal	1.90	1.50
Lamp	6 LED PWB	0.052	0.104
	9 LED PWB	0.152	
	Glass cover	2.17	1.20
Electronics	Power control gear	0.160	0.080
	PWB housing	0.06	0.03
	Cabling	0.22	0.22
Minor components	Miscellaneous (e.g. screws, plugs, labels, stickers etc.)	0.096	0.096
Coating	Powder coating (on main body)	0.326	0.213
Packaging	Cardboard	1.50	1.50
	Expanded polystyrene (EPS)	0.05	0.05
Total	Total without packaging	16.0	10.6
	Total with packaging	17.5	12.1

Manufacturing process

WE-EF manufacturing range from tool-making for die-casting and injection moulding equipment to aluminium die-casting, CNC production, CNC sheet metal working, powder coating and pole production to pre- and end-assembly. To meet our high-quality standards, we continuously invest in tools, production facilities and the training of our staff.



SYSTEM BOUNDARIES

As shown in the table below, this EPD is of the 'cradle-to-gate' type with options . The options include the construction process stage (Modules A4-A5), use stage replacement (B4) and operational energy use (B6), end-of-life transport and processing (Modules C2-C4) and recycling potential (Module D). Other life cycle stages (Modules B1-B3, B5, B7, and C1) are dependent on particular scenarios and best modelled at the infrastructure project level.

Table 4: Modules included in the scope of the EPD

Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundary
Raw material supply	Transport of raw materials	Manufacturing	Transport to customer	Construction / Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction / demolition	Transport to waste processing	Waste processing	Disposal	<ul style="list-style-type: none"> ■ Reuse ■ Recovery ■ Recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	X	MND	X	MND	MND	X	X	X	X

X = included in the EPD

MND = Module not declared (such a declaration shall not be regarded as an indicator result of zero)

Production (Module A)

The production stage includes the environmental impacts associated with raw materials extraction and processing of inputs, transport to, between and within the manufacturing site, manufacturing of average product at the exit gate of the manufacturing site.

The construction process stage includes the environmental impacts associated with transport of the product to site and its installation, including disposal of associated waste. The installation materials (e.g. pole and cabling) have been excluded from this study.

Use stage (Module B)

The use stage includes the emissions and resource consumption associated with the use of construction products, equipment and services in their proper function. The replacement module (B4) is included for the electronic control gear at 50,000 hours of operation, and for LED PWBs at 90,000 hours of operation. This equates to the replacement of the electronic control gear and LED PWBs once during the Reference Service Life.

The operational energy use of the luminaires is calculated based on manufacturer data.

End of life (Module C)

When an infrastructure project reaches its end-of-life, lighting products are disposed of. Waste processing includes collection of waste fractions from the deconstruction and waste processing of material flows intended for reuse, recycling and energy recovery.

This study considers the disassembly of the luminaires into components. Metal components are recycled. The glass cover is sent to landfill. Plastic components are incinerated, and incineration emissions declared since the R1-value is < 0.6. Electronic components including cabling are shredded for recovery of precious metals, with the remainder incinerated. A collection rate of 75% is assumed for electronic components, with the remainder sent to landfill (C4).

Recovery and recycling potential (Module D)

The recovery and recycling potential module considers the environmental benefits or loads resulting from reusable products, recyclable materials and/or useful energy carriers leaving a product system e.g. as secondary materials or fuels. A credit is calculated for the net scrap sent to recycling by comparing the impacts associated with primary and secondary production.

This study includes the recovery of material (metal scrap) arising from the product stage, use stage (B4, replacement) and the end-of-life stage (C3 waste processing) that can be used in a second life cycle. Scrap metals arising through the life cycle are collected for recycling, including precious metals (copper, gold, palladium, platinum, and silver) used in the electronic components and cabling, as well as aluminium, steel, and stainless steel used in the body.

Life cycle inventory (LCI) data and assumption

This EPD is based on an original study from 2012, based on WE-EF's 2011 production year. Primary data were used for all manufacturing operations up to the factory gate, including upstream data for die-casting of aluminium house and frame parts as shown in **Figure 1**. WE-EF confirmed that the primary data for their operations sourced for the production year 2011 remained unchanged. Background data was used for input materials sourced from other suppliers.

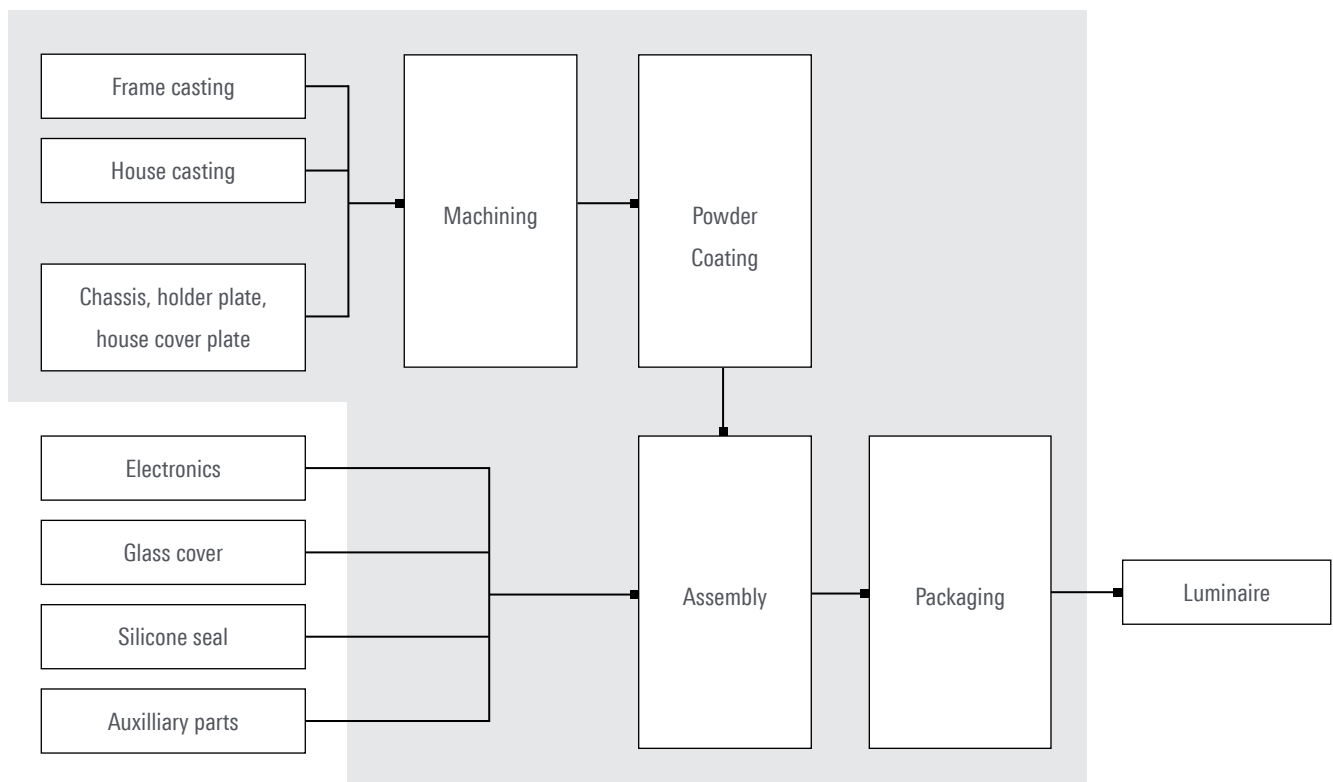


Figure 1: Product stage (cradle to gate) flowchart

All data in the background system were from the GaBi Life Cycle Inventory Database 2020 (Sphera 2020). Most datasets have a reference year between 2016 and 2019 and all fall within the 10 year limit allowable for generic data under EN 15804.

Differences to original EPD

The original EPD was published under the IBU programme. The underlying primary data for the production processes remains the same, but there are a number of changes compared to the original study. The most significant are listed here:

- The maximum wattage of the luminaires has increased, leading to increased electricity consumption across the reference service life.
- The mass of some components (steel chassis, silicone seal and cover) has been updated, affecting the upstream impacts and also the A4 and C2 transport steps. The cover material has also been corrected from the original PMMA lens to a glass cover.
- The aluminium input to the die-casting processes has been changed from primary to secondary, to reflect the actual production process.

This has reduced the A1-A3 impacts and the relative significance of aluminium, but note that this is an improvement in modelling and not a change in the production process. The transport of raw materials has also been improved to include the inbound transport of the aluminium to the die-casting process.

Upstream data

Raw materials used in the product are sourced from Germany. The datasets used for raw materials in the supply chain were sourced from Germany, except for operational materials used in Thailand and Taiwan, which were specific to the country of use.

Electricity

National electricity mixes were used throughout, including Thai and Taiwanese grid mixes for relevant production steps and a German grid mix for all other electricity consumption.

Recycling

It is assumed the luminaires will be decommissioned and dismantled, since they contain valuable materials. The collection rate is therefore assumed to be 100% for the luminaire assemblies. A conservative assumption is made that only 75% of precious metals are recovered from electronic components, with the remainder being sent to inert landfill.

Cut off criteria

Items that represented less than 1% and summed to less than 5% of the total input of mandatory modules (A1-A3) were excluded. No excluded flows were of any known particular environmental concern.

Allocation

Where subdivision of processes was not possible, allocation rules listed in PCR chapter 7.7 have been applied. No allocation has been applied to the foreground processes in this study. In the modules (A1-A3), co-product allocations have only been made in background datasets.

End-of-life allocation follows the requirements of ISO 14044 section 4.3.4.3. Open scrap inputs from the production stage are subtracted from scrap to be recycled at end of life to give the net scrap output from the product life cycle. This remaining net scrap is sent to material recycling.

LCA SCENARIO AND ADDITIONAL TECHNICAL INFORMATION

Transport to the building site (A4)

Name	Unit	Value
Transport distance	km	1,500
Capacity utilisation (including empty runs)	%	61

Installation into the building (A5)

Name	Unit	Value
EPS packaging (incinerated)	kg	0.05
Cardboard packaging (recycled)	kg	1.5

Replacement (B4)

Name	Unit	RFL540-SE	RFL530-SE
Replacement of control gear PWBs (50,000 hours) [number of pieces]	Number/RSL	2	1
Replacement of nine LED PWBs (90,000 hours) [number of pieces]	Number/RSL	9	n/a
Replacement of six LED PWBs (90,000 hours) [number of pieces]	Number/RSL	2	4
Disposal of replaced components (recycling) [kg]	kg	0.364	0.184

Reference service life (RSL)

Name	Unit	Value
Reference service life	years	20

Operational energy use (B6)

Name	Unit	RFL540-SE	RFL530-SE
Electricity consumption (RSL)	kWh	9,460	4,730

End of life (C1-C4)

Name	Unit	RFL540-SE	RFL530-SE
Recycling	kg	11.09	7.30
Waste incineration	kg	2.66	2.03
Landfill	kg	2.20	1.23

Assessment indicators

The results tables describe the different environmental indicators for each product per declared unit, for each declared module. The first section of results contains the environmental impact indicators, describing the potential environmental impacts of the product as shown in **Table 5**.


The final section shows the resource indicators, describing the use of renewable and non-renewable material resources, renewable and non-renewable primary energy and water, as shown in **Table 6** sections display.

Table 5: Indicators for life cycle impact assessment

Abbreviation	Unit	Indicator
GWP	kg CO ₂ eq.	Global warming potential
ODP	kg CFC 11 eq.	Ozone depletion potential
AP	kg SO ₂ eq.	Acidification potential
EP	kg PO ₄ ³⁻ eq.	Eutrophication potential
POCP	kg ethene eq.	Photochemical ozone creation potential
ADPE	kg Sb eq.	Abiotic depletion potential for non-fossil resources
ADPF	MJ	Abiotic depletion potential for fossil resources

Table 6: Life cycle inventory indicators on use of resources

Abbreviation	Unit	Indicator
PERE	MJ, net calorific value	Use of renewable primary energy excluding renewable primary energy resources used as raw materials
PERM	MJ, net calorific value	Use of renewable primary energy resources used as raw materials
PERT	MJ, net calorific value	Total use of renewable primary energy resources
PENRE	MJ, net calorific value	Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials
PENRM	MJ, net calorific value	Use of non-renewable primary energy resources used as raw materials
PENRT	MJ, net calorific value	Total use of non-renewable primary energy resources
SM	kg	Use of secondary material;
RSF	MJ, net calorific value	Use of renewable secondary fuels
NRSF	MJ, net calorific value	Use of non-renewable secondary fuels
FWT	m ³	Total use of net fresh water

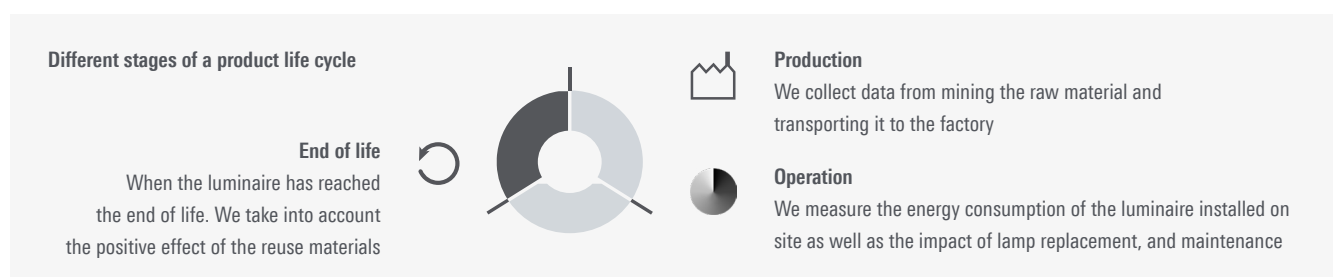

Abbreviation	Unit	Indicator
HWD	kg	Hazardous waste disposed
NHWD	kg	Non-hazardous waste disposed
RWD	kg	Radioactive waste disposed
CRU	kg	Components for reuse
MER	kg	Materials for energy recovery
MFR	kg	Materials for recycling
EEE	MJ	Exported electrical energy
EET	MJ	Exported thermal energy

For WE-EF products, the following indicators are not relevant, hence result in zero values:

- Renewable primary energy resources as material utilisation (PERM)
- Use of renewable secondary fuels (RSF)
- Use of non-renewable secondary fuels (NRSF)
- Components for re-use (CRU)
- Exported electrical energy (EEE)
- Exported thermal energy (EET)

ENVIRONMENTAL PERFORMANCE – RFL540-SE

Environmental impact	Unit	Production	Installation		Use Stage		End-of-life			Mod D
		A1-A3	A4	A5	B4	B6	C2	C3	C4	D
Global warming potential (total)	kg CO ₂ -eq.	84.8	0.130	0.126	11.3	5,310	0.118	6.23	0.0300	-65.2
Depletion potential of the stratospheric ozone layer	kg CFC 11-eq.	1.82E-10	4.30E-17	8.55E-17	1.47E-10	2.20E-10	3.92E-17	1.21E-14	1.67E-16	-9.18E-14
Acidification potential of land and water	kg SO ₂ -eq.	0.249	8.92E-05	1.40E-05	0.0521	6.29	8.14E-05	9.84E-04	1.91E-04	-0.236
Eutrophication potential	kg PO ₄ ³⁻ -eq.	0.0282	1.68E-05	3.13E-06	0.00385	1.24	1.53E-05	2.20E-04	2.15E-05	-0.0141
Photochemical ozone creation potential	kg C ₂ H ₄ -eq.	0.0174	-3.03E-06	1.30E-06	0.00393	0.518	-2.76E-06	8.69E-05	1.45E-05	-0.0137
Abiotic depletion potential – elements	kg Sb-eq.	0.00130	1.09E-08	8.92E-10	7.34E-04	0.00206	9.97E-09	1.16E-07	3.04E-09	-0.00108
Abiotic depletion potential – fossil fuels	MJ	1,130	1.74	0.0534	129	52,800	1.59	4.53	0.426	-691

Resource use

Renewable primary energy as energy carrier	MJ	338	0.102	0.0153	30.8	38,500	0.0927	2.13	0.0575	-276
Renewable primary energy resources as material utilization	MJ	0	0	0	0	0	0	0	0	0
Total use of renewable primary energy resources	MJ	338	0.102	0.0153	30.8	38,500	0.0927	2.13	0.0575	-276
Non-renewable primary energy as energy carrier	MJ	1,220	1.75	0.0589	143	67,000	1.59	5.30	0.438	-858
Non-renewable primary energy as material utilization	MJ	6.84	0	0	1.99	0	0	0	0	0
Total use of non-renewable primary energy resources	MJ	1,230	1.75	0.0589	145	67,000	1.59	5.30	0.438	-858
Use of secondary material	kg	2.98	0	0	0	0	0	0	0	0
Use of renewable secondary fuels	MJ	0	0	0	0	0	0	0	0	0
Use of non-renewable secondary fuels	MJ	0	0	0	0	0	0	0	0	0
Use of net fresh water	m ³	0.327	9.11E-05	3.11E-04	0.0805	20.8	8.31E-05	0.0163	1.10E-04	-0.597

Waste categories and output flows

Hazardous waste disposed	kg	1.68E-05	6.53E-08	2.25E-10	9.55E-07	4.50E-05	5.95E-08	1.31E-08	6.68E-09	-3.41E-07
Non-hazardous waste disposed	kg	5.19	3.07E-04	0.0132	0.834	51.5	2.80E-04	0.666	2.20	-14.9
Radioactive waste disposed	kg	0.0390	1.84E-06	2.19E-06	0.00621	5.60	1.68E-06	3.07E-04	4.92E-06	-0.0661
Components for re-use	kg	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	0	0	1.50	0.0356	0	0	8.29	0	0
Materials for energy recovery	kg	0	0	0.0500	0	0	0	0	0	0
Exported electrical energy	MJ	0	0	0	0	0	0	0	0	0
Exported thermal energy	MJ	0	0	0	0	0	0	0	0	0

ENVIRONMENTAL PERFORMANCE – RFL530-SE

Environmental impact	Unit	Production	Installation		Use Stage		End-of-life			Mod D
		A1-A3	A4	A5	B4	B6	C2	C3	C4	D
Global warming potential (total)	kg CO ₂ -eq.	57.4	0.0896	0.126	5.77	2,650	0.0781	4.85	0.0167	-37.3
Depletion potential of the stratospheric ozone layer	kg CFC 11-eq.	1.08E-10	2.97E-17	8.55E-17	7.35E-11	1.10E-10	2.59E-17	1.10E-14	9.28E-17	-5.05E-14
Acidification potential of land and water	kg SO ₂ -eq.	0.165	6.16E-05	1.40E-05	0.0263	3.15	5.37E-05	8.02E-04	1.06E-04	-0.135
Eutrophication potential	kg PO ₄ ³⁻ -eq.	0.0189	1.16E-05	3.13E-06	0.00196	0.621	1.01E-05	1.77E-04	1.19E-05	-0.00805
Photochemical ozone creation potential	kg C ₂ H ₄ -eq.	0.0125	-2.09E-06	1.30E-06	0.00198	0.259	-1.82E-06	7.07E-05	8.05E-06	-0.00785
Abiotic depletion potential – elements	kg Sb-eq.	8.79E-04	7.55E-09	8.92E-10	3.67E-04	0.00103	6.58E-09	1.06E-07	1.69E-09	-6.35E-04
Abiotic depletion potential – fossil fuels	MJ	781	1.20	0.0534	65.9	26,400	1.05	3.91	0.237	-395

Resource use

Renewable primary energy as energy carrier	MJ	249	0.0702	0.0153	16.2	19,300	0.0612	1.95	0.0320	-156
Renewable primary energy resources as material utilization	MJ	0	0	0	0	0	0	0	0	0
Total use of renewable primary energy resources	MJ	249	0.0702	0.0153	16.2	19,300	0.0612	1.95	0.0320	-156
Non-renewable primary energy as energy carrier	MJ	843	1.21	0.0589	73.2	33,500	1.05	4.62	0.244	-490
Non-renewable primary energy as material utilization	MJ	5.23	0	0	0.993	0	0	0	0	0
Total use of non-renewable primary energy resources	MJ	849	1.21	0.0589	74.2	33,500	1.05	4.62	0.244	-490
Use of secondary material	kg	2.48	0	0	0	0	0	0	0	0
Use of renewable secondary fuels	MJ	0	0	0	0	0	0	0	0	0
Use of non-renewable secondary fuels	MJ	0	0	0	0	0	0	0	0	0
Use of net fresh water	m ³	0.232	6.29E-05	3.11E-04	0.0409	10.4	5.48E-05	0.0127	6.14E-05	-0.340

Waste categories and output flows

Hazardous waste disposed	kg	1.58E-05	4.51E-08	2.25E-10	4.78E-07	2.25E-05	3.93E-08	1.04E-08	3.72E-09	-2.01E-07
Non-hazardous waste disposed	kg	3.90	2.12E-04	0.0132	0.423	25.8	1.85E-04	0.512	1.23	-8.52
Radioactive waste disposed	kg	0.0266	1.27E-06	2.19E-06	0.00324	2.80	1.11E-06	2.82E-04	2.74E-06	-0.0375
Components for re-use	kg	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	0	0	1.50	0.0178	0	0	4.89	0	0
Materials for energy recovery	kg	0	0	0.0500	0	0	0	0	0	0
Exported electrical energy	MJ	0	0	0	0	0	0	0	0	0
Exported thermal energy	MJ	0	0	0	0	0	0	0	0	0

REFERENCES

EN 15804:2012+A1:2013; Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. Brussels: European Committee for Standardization.

EPD Australasia (2018). Instructions of the Australasian EPD Programme: A regional annex to the General Programme Instructions of the International EPD® System. URL: www.epd-australasia.com.

EPD International (2019a). General Programme Instructions of the International EPD® System.
Stockholm: International EPD® System. URL: www.environdec.com

EPD International (2019b). PCR 2012:01 Construction Products and Construction Services, Version 2.31, 2019-12-20.
Stockholm: International EPD® System. URL: www.environdec.com

ISO 14040:2006; Environmental management – Life cycle assessment – Principles and framework.
Geneva: International Organization for Standardization.

ISO 14044:2006; Environmental management – Life cycle assessment – Requirements and guidelines.
Geneva: International Organization for Standardization.

ISO 14025:2006; Environmental labels and declarations – Type III environmental declarations – Principles and procedures.
Geneva: International Organization for Standardization.

Sphera. (2020). GaBi life cycle inventory database documentation.
URL: <http://www.gabi-software.com/support/gabi/gabi-database-2020-lci-documentation/>

thinkstep-anz (2020); LCA of LED Street and Area Lighting Luminaires v1.0 22/10/2020.

GENERAL INFORMATION

An Environmental Product Declaration, or EPD, is a standardised and verified way of quantifying the environmental impacts of a product based on a consistent set of rules known as a PCR (Product Category Rules).

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.

Declaration owner:



WE-EF LEUCHTEN GmbH

Web: www.we-ef.com

Email: info.germany@we-ef.com

Post: Toepinger Strasse 16, 29646 Bispingen, Germany

Reference year for data: 2019

EPD produced by:



thinkstep Pty Ltd

Web: www.thinkstep-anz.com

Email: anz@thinkstep-anz.com

Post: 25 Jubilee street, Perth, Western Australia 6151

EPD produced by:



The International EPD® System

Web: www.environdec.com

Email: info@environdec.com

Post: EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden

CEN standard EN 15804+A1 served as the core PCR

PCR:

PCR 2012:01 Construction products and construction services, version 2.33, 2020-09-18

PCR review was conducted by:

The Technical Committee of the International EPD® System

Chair:

Massimo Marino. Contact via info@environdec.com

Independent verification of the declaration
and data, according to ISO 14025:

☐ EPD process certification (Internal) ☒ EPD verification (External)

Third party verifier:

Martin Erlandsson

Email: martin.erlandsson@ivl.se

Verifier approved by:

The International EPD® System

Procedure for follow-up of data during EPD
validity involved third-party verifier:

☐ Yes ☒ No

Version history:

v1.0: Original publication

v1.1: Minor error identified and corrected, results updated

■ WE-EF LEUCHTEN GmbH

Toepinger Strasse 16

29646 Bispingen

Germany

Tel +49 5194 909 0

info.germany@we-ef.com

www.we-ef.com
