

# Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

## Precast concrete products – Linear structural elements

from

**Perdanga, UAB**



Programme:	The International EPD® System, <a href="http://www.environdec.com">www.environdec.com</a>
Programme operator:	EPD International AB
EPD registration number:	S-P-04752
Publication date:	2021-10-06
Valid until:	2026-10-05

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)*



# Environmental Product Declaration

This is an Environmental Product Declaration for precast concrete products – linear structural elements (columns and beams), produced by Perdanga, UAB. The declaration is registered in accordance with the EPD programme of the International EPD® System and the Product Category Rules for Construction Products 2019:14, version 1.1. The EPD are used in both business-to-business (B2B) and business-to-consumer (B2C) communication.

## Company information

Owner of the EPD:

Perdanga, UAB

e-mail: [valaitis@perdanga.lt](mailto:valaitis@perdanga.lt)

[www.perdanga.lt](http://www.perdanga.lt)

Description of the organisation: The factory counts its age since 1961. Since 1992 the enterprise has been registered as the Limited Liability Company "Perdanga". Perdanga is the one of the largest producers of concrete products in Lithuania with a turnover of 28 MEUR. In year 2003 company established second factory in Vilnius. The Company's products were used in major construction projects: Klaipeda city waste-water treatment plant, Butinge Oil Terminal, Mazeikiai Refinery, Klaipeda Container Terminal, Cruise Terminal, production facilities of foreign capital companies "Philip Morris", Master Foods. Perdanga production is also exported to neighbouring countries – Latvia, Russia, Sweden and Norway. Company has implemented Quality management systems EN ISO 9001:2015 and EN ISO 14001:2015

Product-related or management system-related certifications: linear structural elements (columns and beams) have CE marking. They are produced according to requirements of EN 13225. Common aspects which apply to all precast products are specified in EN 13369 and EN 206-1.

Name and location of production site(s): Perdanga, UAB Dubysos str. 27, 91181 Klaipeda, Lithuania

## Product information

Product name: linear structural elements

Product description: Precast concrete products – linear structural elements refer to beams and columns. Prefabricated reinforced linear structural elements are produced in a variety of sizes, shapes, and length. Usually, the surface of the elements is smooth, and edges are chamfered. The cross-sections of the rectangular elements can be from 300x300 mm to 1000x1000 mm. The diameter of circular elements is available from 250 mm to 800 mm. Elements of other cross-sectional shapes, such as e.g., polygonal, oval, etc. are produced according to special orders. Concrete grades from C30/37 to C55/67 are used in the production.

Fire resistance of elements - 30-120 min. The fact that reinforced concrete structural elements have high fire resistance index without use of additional materials allows to use them in various projects.

Linear structural elements lengths can reach 40 m as one unit. But generally, elements with a maximum length up to 13,5 m are produced. Such length is limited by rules of transportation without special permits and lifting capacity of tower cranes at building sites. For higher buildings compound elements are used. Columns can have corbels or structural inserts to provide support for beams.

There are three possible column-foundation connection types:

- bolt connection,
- grouted connection,
- pocket foundations.

UN CPC code: 375

Geographical scope: Europe

## LCA information

Functional unit / declared unit: In accordance with the PCR the declared unit is 1 metric tonne of the product.

Reference service life: The reference service life for the linear structural elements is set at 100 years.

Time representativeness: Primary data was collected internally. The production data refers to the average of the year 2020.

Database(s) and LCA software used: The Ecoinvent database provides the life cycle inventory data for the raw and process materials obtained from the background system. The used database is Ecoinvent 3.6. The LCA software used is One Click LCA.

### Description of system boundaries:

Cradle to gate with options, modules C1-C4 and module D. The LCA was carried out considering the Product stage phases (A1, A2, A3), Distribution (A4), End of life (C1, C2, C3, C4), Potential environmental benefits (D) in accordance with EN 15804.

### Modules declared:


	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X

Description of the system boundary (X = Included in LCA; MND = Module Not declared; MNR = Module Not relevant)

Data quality: The foreground data collected internally is based on yearly production amounts and extrapolations of measurements on specific machines and plants. Overall, the data quality can be described as good. The primary data collection has been done thoroughly.

Cut-off criteria: Life cycle inventory data for a minimum of 99% of total material and energy input flows have been included in the life cycle analysis. Although only materials having in summa less than 1% of weight of product were not used in calculations.

#### System diagram:

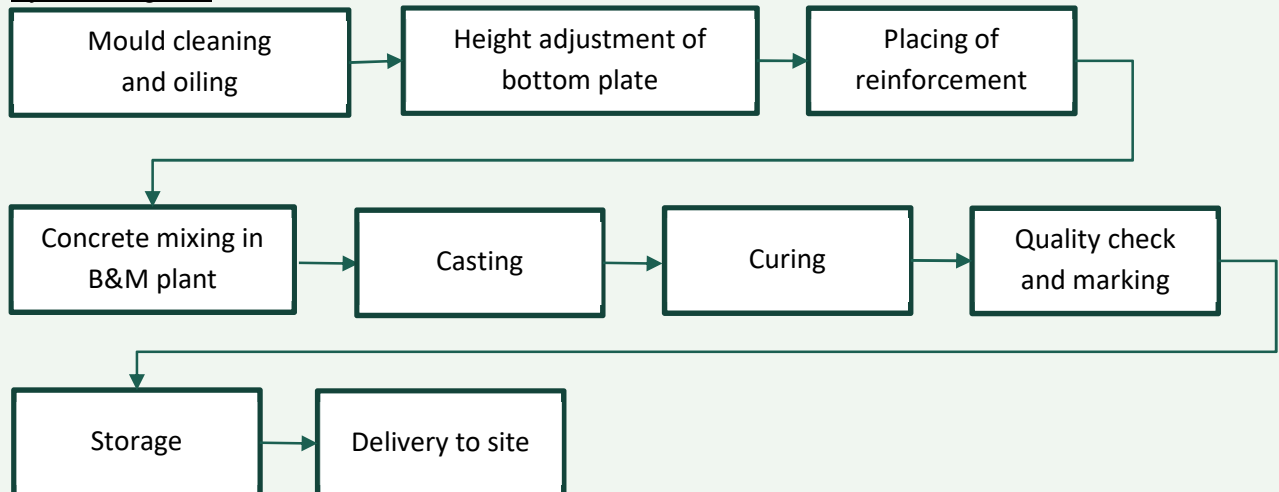

#### Product stage:

A1: This stage considers the extraction and processing of raw materials as well as energy consumption.

A2: The raw materials are transported to the manufacturing plant. In this case, the model includes road transportation of each raw material.

A3: This stage includes the manufacture of products and packaging. It also considers the energy consumption and waste generated at production plant.

#### **Production process description**

Precast concrete structural elements are produced on linear tables with hydraulic side moulds. Reinforcement is placed and position is fixed by using plastic fixators. Reinforcement intensity is calculated by structural designer. After checking of reinforcement positioning, concrete is poured into mould. Pocket vibrators are used for compaction of concrete. After casting whole bed is covered with PVC coat for curing process. When taken out of mould columns are inspected visually and geometrical measurements are checked. If needed, small surface repair works are done. After finishing works are done, elements are delivered to stockyard for storage or directly loaded to truck and delivered to building site.

#### Construction process stage:

A4: This stage includes transport from the production gate to the construction site where the product shall be installed. Transportation is calculated based on data form manufacturer and a scenario with the parameters described in the following table. The transportation doesn't cause losses as products are packaged properly.

Parameter	Value/Description
Vehicle type used for transport	EURO 5 truck with a trailer with an average load of 16-32t
Distance	100 % of production: Truck – 169 km.
Capacity utilization	56 % of the capacity in volume (truck),

#### Use stage:

In normal use scenario, it is assumed that no maintenance (B2), repair (B3), replacement (B4) and refurbishment (B5) is needed.

#### End of Life stage:

This stage includes the following modules:

#### **C1: Deconstruction, dismantling, demolition**

Consumption of fuel in demolition process is calculated according to transported mass. Energy consumption demolition is 10 kWh for 1000 kg. The source of energy is diesel fuel used by work machines.

#### **C2: Transport of the discarded product to the processing site**

It is estimated that there is no mass loss during the use of the product, therefore the end-of-life product is assumed that it has the same weight with the declared product. All the end-of-life product is assumed to be sent to the closest facilities such as recycling and landfill. Transportation distance to the closest disposal area is estimated as 50 km and the transportation method is lorry which is the most common.

#### **C3: Waste processing for reuse, recovery and/or recycling**

Based on Europe average 90% of steel are transformed into secondary material in a recycling plant. According to European Commission Waste Framework Directive by 2020, the preparing for re-use, recycling and other material recovery of non-hazardous construction and demolition waste shall be increased to a minimum of 70 % by weight. It is assumed that 70% of the concrete waste is recycled.

#### **C4: Discharge (disposal)**

The remaining 30 % of concrete and 10 % of steel are assumed to be sent to the landfill.

#### **Benefits and loads beyond the system boundary (D):**

Benefits of recyclable waste generated in the phase C3 are considered in the phase D. The recycled steel has been modelled to avoid use of primary materials. The scrap content in the studied product has been acknowledged and only the mass of primary steel in the product provides the benefit to avoid double counting. 70 % of concrete is assumed to be converted into a raw material.

## **Content information**

Product components	Weight, kg	Weight, %
Cement	159.83	15.98
Gravel	231.46	23.15
Breakstone	161.11	16.11
Sand	327.39	32.74
Reinforcement	55.17	5.52
Water	64.7	6.47
Additives	0.36	0.04
<b>TOTAL</b>	<b>1000</b>	<b>100</b>

No dangerous substances from the candidate list of SVHC for Authorisation are used in the product

## **Packaging**

Distribution packaging: wooden gaskets. After use, packaging materials can be re-used or recycled.

# Environmental Information

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Results per functional or declared unit											
Impact category	Unit	A1	A2	A3	A1-A3	A4	C1	C2	C3	C4	D
GWP – total	kg CO <sub>2</sub> e	2.49E2	5.86E0	4.15E0	2.59E2	1.52E1	3.30E0	4.55E0	3.80E0	1.52E0	-3.49E1
GWP – fossil	kg CO <sub>2</sub> e	2.46E2	5.86E0	4.09E0	2.56E2	1.54E1	3.30E0	4.54E0	3.87E0	1.52E0	-3.49E1
GWP – biogenic	kg CO <sub>2</sub> e	2.53E0	4.10E-3	5.39E-2	2.59E0	1.12E-2	9.17E-4	3.30E-3	-6.95E-2	3.02E-3	2.87E-2
GWP – LULUC	kg CO <sub>2</sub> e	9.57E-2	1.82E-3	4.27E-3	1.02E-1	4.62E-3	2.79E-4	1.37E-3	1.62E-3	4.52E-4	-1.28E-2
Ozone depletion pot.	kg CFC11e	1.23E-5	1.37E-6	4.55E-7	1.41E-5	3.61E-6	7.12E-7	1.07E-6	7.48E-7	6.27E-7	-1.44E-6
Acidification potential	mol H <sup>+</sup> e	8.91E-1	2.89E-2	1.57E-2	9.35E-1	6.45E-2	3.45E-2	1.91E-2	4.25E-2	1.44E-2	-1.80E-1
EP-freshwater <sup>2)</sup>	kg Pe	8.20E-3	4.71E-5	1.69E-4	8.42E-3	1.25E-4	1.33E-5	3.7E-5	9.53E-5	1.84E-5	-2.12E-3
EP-marine	kg Ne	1.98E-1	8.43E-3	3.48E-3	2.10E-1	1.94E-2	1.52E-2	5.75E-3	1.55E-2	4.97E-3	-3.56E-2
EP-terrestrial	mol Ne	2.30E0	9.32E-2	3.98E-2	2.44E0	2.15E-1	1.67E-1	6.35E-2	1.72E-1	5.48E-2	-4.19E-1
POCP (“smog”)	kg NMVOCe	7.74E-1	2.91E-2	1.24E-2	8.15E-1	6.90E-2	4.59E-2	2.04E-2	4.73E-2	1.59E-2	-1.77E-1
ADP-minerals & metals	kg Sbe	2.64E-3	9.85E-5	3.05E-5	2.77E-3	2.62E-4	5.03E-6	7.75E-5	7.19E-5	1.39E-5	-1.13E-3
ADP-fossil resources	MJ	1.90E3	9.07E1	6.11E1	2.05E3	2.39E2	4.54E1	7.07E1	5.34E1	4.25E1	-3.20E2
Water use <sup>1)</sup>	m <sup>3</sup> e depr.	9.01E1	3.34E-1	9.91E-1	9.14E1	8.89E-1	8.46E-2	2.63E-1	3.09E-1	1.97E0	-2.35E1

GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential. 1) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator. 2) Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO<sub>4</sub>e.

## USE OF NATURAL RESOURCES

Results per functional or declared unit											
Impact category	Unit	A1	A2	A3	A1-A3	A4	C1	C2	C3	C4	D
Renew. PER as energy	MJ	1.68E2	1.13E0	2.82E1	1.98E2	3.01E0	2.45E-1	8.90E-1	2.86E0	3.44E-1	-3.07E1
Renew. PER as material	MJ	0.00	0.00	3.50E1	3.50E1	0.00	0.00	0.00	0.00	0.00	0.00
Total use of renew. PER	MJ	1.68E2	1.13E0	6.32E1	2.33E2	3.01E0	2.45E-1	8.90E-1	2.86E0	3.44E-1	-3.07E1
Non-re. PER as energy	MJ	1.90E3	9.07E1	6.11E1	2.05E3	2.39E2	4.54E1	7.07E1	5.34E1	4.25E1	-3.2E2
Non-re. PER as material	MJ	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total use of non-re. PER	MJ	1.90E3	9.07E1	6.11E1	2.05E3	2.39E2	4.54E1	7.07E1	5.34E1	4.25E1	-3.2E2
Secondary materials	kg	4.84E1	0.00	0.00	4.84E1	0.00	0.00	0.00	0.00	0.00	1.18E1
Renew. secondary fuels	MJ	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-ren. secondary fuels	MJ	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Use of net fresh water	m <sup>3</sup>	1.68E2	1.13E0	2.82E1	1.98E2	3.01E0	4.01E-3	1.47E-2	1.02E-2	4.65E-2	-9.83E-1

PER = Primary energy resources

## END OF LIFE – WASTE

Results per functional or declared unit											
Impact category	Unit	A1	A2	A3	A1-A3	A4	C1	C2	C3	C4	D
Hazardous waste	kg	3.79E1	8.85E-2	1.42E-1	3.81E1	2.32E-1	4.88E-2	6.87E-2	0.00	3.97E-2	-1.18E1
Non-hazardous waste	kg	4.03E2	9.57E0	5.24E0	4.17E2	2.57E1	5.22E-1	7.60E0	0.00	2.89E2	-1.13E2
Radioactive waste	kg	7.00E-3	6.23E-4	9.22E-5	7.71E-3	1.64E-3	3.18E-4	4.85E-4	0.00	2.81E-4	-4.06E-4

## END OF LIFE – OUTPUT FLOWS

Results per functional or declared unit											
Impact category	Unit	A1	A2	A3	A1-A3	A4	C1	C2	C3	C4	D
Components for re-use	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Materials for recycling	kg	0.00	0.00	2.45E0	2.45E0	0.00	0.00	0.00	7.11E2	0.00	0.00
Materials for energy rec	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Exported energy	MJ	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

## ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930


Results per functional or declared unit											
Impact category	Unit	A1	A2	A3	A1-A3	A4	C1	C2	C3	C4	D
Global Warming Pot.	kg CO2e	2.41E2	5.80E0	4.00E0	2.51E2	1.52E1	3.27E0	4.50E0	3.83E0	1.49E0	-3.34E1
Ozone depletion Pot.	kg CFC11e	1.09E-5	1.09E-6	3.61E-7	1.23E-5	2.87E-6	5.63E-7	8.49E-7	6.02E-7	4.97E-7	-1.28E-6
Acidification	kg SO2e	6.75E-1	1.55E-2	1.24E-2	7.03E-1	3.13E-2	4.87E-3	9.25E-3	1.31E-2	6.02E-3	-1.41E-1
Eutrophication	kg PO4 3e	3.50E-1	2.78E-3	5.70E-3	3.59E-1	6.31E-3	8.57E-4	1.87E-3	4.46E-3	1.17E-3	-9.31E-2
POCP ("smog")	kg C2H4e	6.40E-2	8.38E-4	8.10E-4	6.56E-2	1.98E-3	5.01E-4	5.86E-4	8.35E-4	4.42E-4	-2.11E-2
ADP-elements	kg Sbe	2.64E-3	9.85E-5	3.05E-5	2.77E-3	2.62E-4	5.03E-6	7.75E-5	7.19E-5	1.39E-5	-1.13E-3
ADP-fossil	MJ	1.90E3	9.07E1	6.11E1	2.05E3	2.39E2	4.54E1	7.07E1	5.34E1	4.25E1	-3.20E2



## General information

### Programme information

<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:info@environdec.com">info@environdec.com</a>

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)	
Product category rules (PCR): PCR 2019:14 Construction products (version 1.1); Complementary PCR (c-PCR):C-PCR-003 (TO PCR 2019:14) - Concrete and concrete elements, version: 2019-12-20;	
PCR review was conducted by: The International EPD® System	
Independent third-party verification of the declaration and data, according to ISO 14025:2006:  <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification	
Third party verifier: Vladimir Kočí, LCA Studio	
Approved by: The International EPD® System	
Procedure for follow-up of data during EPD validity involves third party verifier:  <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.



## References

- General Programme Instructions of the International EPD® System. Version 4.0;
- PCR 2019:14 Construction products (version 1.1)
- EN 15804:2012+A2:2019 Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products.
- ISO 14020:2001 Environmental labels and declarations – General principles.
- ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.
- ISO 14044:2006 Environmental management. Life Cycle Assessment. Requirements and guidelines.
- ISO 14025:2010 Environmental labels and declarations. Type III environmental declarations. Principles and procedures.

## Tools and database

- One Click LCA tool;
- Ecoinvent 3.6 database

## Contact information

EPD owner:

Perdanga, UAB  
[www.perdanga.lt](http://www.perdanga.lt)



LCA author:

Vesta Consulting, UAB  
[www.vestaconsulting.lt](http://www.vestaconsulting.lt)



Programme operator:

The International EPD®  
System  
<https://www.environdec.com>



