





Environmental Product Declaration

In accordance with ISO 14025 and EN 15804+A2:2019 for:

LIP Grouts

from LIP Bygningsartikler A/S



Programme: The International EPD® System, www.environdec.com

Programme operator: EPD International AB

EPD registration number: S-P-04249 available from EPD International

 Publication date:
 2021-11-02

 Valid until:
 2026-10-28

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com





General information

Owner of the declaration and manufacturer:

LIP Bygningsartikler A/S · Industrivej 16 · DK-5580 Nørre Aaby · Phone: +45 6442 1330 · Fax: +45 6442 3408

Declaration issued: 2021-11-02

EPD Prepared by: Bureau Veritas HSE, Denmark

Standards: ISO 14025 and EN 15804+A2:2019. EPD's of other construction products may not be comparable if they do not comply with this standard.

Scope: This LCA study is intended to be used in a cradle to grave with module D EPD covering the following grouts in table 1, all produced by LIP Bygningsartikler A/S at the same production site. The EPD will be accessible on http://www.lip.dk/ together with safety data sheets and product information, providing information for business-to-business communication. The Geographical scope is Europe.

About LIP Bygningsartikler A/S

LIP Bygningsartikler A/S is a Danish Company, which since its founding in 1967 has produced high quality products at competitive prices.

The product range from the beginning was tile adhesive and sealants, which since then has been expanded with products within flooring putty, waterproofing, silicone, epoxy, filler compounds, etc.

All our products are continuously under internal as well as external quality control, so that we can always live up to our slogan:

LIP - when building on quality!





Product information

Products represented

LIP Multi Grout Manhattan, LIP Multi Grout Grey, LIP Multi Grout Antracite, LIP Multi Grout Jasmin, LIP Multi Grout Pearl, LIP Multi Grout Sand, LIP Multi Grout White, LIP Natural Stone Grout, LIP Rapid-Setting Tile Adhesive.



Figure 1: Pictures of the ten LIP products covered in this project report.

Product description

These products are manufactured by LIP Bygningsartikler A/S in the production plants located in Nørre Aaby, Denmark. These products are used for fixing and laying wall and floor tiles, marble, facing bricks, glass wool batts, Rockwool batts, polystyrene veneers, etc.

The manufacturing process starts from raw materials purchased from suppliers and stored in the plant. Bulk raw materials are stored in specific silos and added mostly automatically in the production mixer, according to the formula of the product. Other raw materials, supplied in bags or big bags, are stored in the warehouse and added automatically or manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches.

The semi-finished product is then packaged in bags, put on wooden pallets, covered by stretched hoods and stored in the Finished Products' warehouse. The quality of final products is controlled before the sale.

The product is supplied from production in dry form, premixed in respect of all contents but water. Water is added at the building site in the construction/installation stage, in a defined amount and technique, in order to produce a deformable cementitious adhesive of high performance.

Table 1: Product information for the ten products covered by this EPD.

Prod	uct name	Article no.	Description
Danish	English	Article no.	Description
LIP Multifuge Manhattan	LIP Multi Grout Manhattan	230000	5 and 20 kg bags
			cement based
			0.2L water per kg
LIP Multifuge Grå	LIP Multi Grout Grey	230017	5 and 20 kg bags
			Grey cement based
			0.2L water per kg
LIP Multifuge Koksgrå	LIP Multi Grout Antracite	230024	5 and 20 kg bags
			Antracite cement based
			0.2L water per kg
LIP Multifuge Jasmin	LIP Multi Grout Jasmin	51063	5 kg bags





			Cement based
			0.2L water per kg
LIP Multifuge Perlehvid	LIP Multi Grout Pearl	230048	5 and 20 kg bags
			White cement based
			0.2L water per kg
LIP Multifuge Sand	LIP Multi Grout Sand	230031	5 and 20 kg bags
			Cement based
			0.2L water per kg
LIP Multifuge Hvid	LIP Multi Grout White	51124	5 kg bags
			White cement based
			0.2L water per kg
LIP Multifuge Sort	LIP Multi Grout Black	51117	5 kg bags
			Black cement based
			0.2L water per kg
LIP Naturstensklæb	LIP Natural Stone Grout	200058	20 kg bags
			White cement based
			0.24L water per kg
LIP Hurtighærdende	LIP Rapid-Setting Tile	200034	5 and 20 kg bags
Fliseklæb	Adhesive		Grey cement based
			0.24L water per kg

Declared Unit

Declared unit is 1 kg of finished product according to the PCR 2019-14 PCR Construction products v1.11.

The product consumption, of course, depends on the size of the tile, unevenness, grout size and the size of the toothpick.

Reference service life

According to LIP Bygningsartikler A/S experience, the Reference Service Life (RSL) of premade grouts has been known to be 50 years or longer.

Technical data

The products are designed, produced and CE marked according to DS/EN 13888 (grouts for ceramic tiles - Requirements, conformity assessment, classification and designations). They are classified as seen in table 2 according to DS/EN 13888 (grouts for ceramic tiles - Requirements, conformity assessment, classification and designations).





Table 2: Performance information for the ten products according to EN 12004:2007+A1:2012.

	LIP Multi Grout Manhattan	LIP Multi Grout Grey	LIP Multi Grout Antracite	LIP Multi Grout Jasmin	LIP Multi Grout Pearl	LIP Multi Grout Sand	LIP Multi Grout white	LIP Multi Grout black
	CG2WA	CG2WA	CG2WA	CG2WA	CG2WA	CG2WA	CG2WA	CG2WA
Bend's tearing strength	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2
Bend's tearing strength after freeze- thaw cycles	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2	≥ 3.5 N/mm2
Crushing strength	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2
Crushing strength after freeze-thaw cycles	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2	≥ 15 N/mm2
					LIP Natural Stone Grout	LIP Rapid- setting Tile Adhesive		
					C2-FE-S1	C2-FE-S1		
Initial tensile adhesion	strength				≥ 1 N/mm2	≥ 1 N/mm2		
Early adhesion					≥ 0.5 N/mm2	≥ 0.5 N/mm2		
Tensile adhesion streng	gth after hea	t aging			≥ 1 N/mm2	≥ 1 N/mm2		
Tensile adhesion streng	gth after wat	er immersio	n		≥ 1 N/mm2	≥ 1 N/mm2		

Air emission

All the seven Grouts covered in this EPD has low dust technology and very low emission of volatile organic compounds and documented with GEV-EMICODE EC $\mathbf{1}^{\text{PLUS}}$. Documentation attached for GEV-EMICODE.



Content declaration

Content declaration including packaging covering the seven LIP Grouts in this EPD.

Table 3: Content declaration, which covers the ten LIP products.

	·	·	LIP Grouts	
Product con	nponents	Weight%	Post-consumer material, weight-%	Renewable material, weight-%
Silica sand		35 - 60	0%	0%
Cement		25 - 30	0%	0%
Dolomite		0 - 30	0%	0%
Additives		1 - 10	0%	0%
Packaging m	naterials	Weight, kg	Weight-% (versus the prod	luct)
Bags	Paper	12 g/kg product	1.2 %	
	PE-film	0.5 g/kg product	0.05 %	
Transport packaging	PE-film	0.6 g/kg product	0.06 %	
Total:			<1.5%	





During the life cycle of the product no hazardous substance listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorization" has been used in a percentage higher than 0.1% of the weight of the product.

LCA information

Product category rules (PCR)

PCR 2019:14 Construction products (EN 15804:A2) Version 1.11.

Time representativeness

Data from factory (primary data) is from 2020 and 2021.

Database(s) and LCA software used

LCA Software: Simapro 9.1.0.7.

Database: Ecoinvent 3.6 – allocation, cut-off by classification – unit.

The impact models used are the ones included in the Simapro method named EN 15804 + A2.

Description of system boundaries

This study covers the cradle to grave with module D of PCR 2019-14 PCR Construction products v1.11. Table 4: Life cycle stages covered by this LCA study.

		Produ	ct stage	Instal proc	lation esses			U	se stag	ge			E	nd of I	ife stag	ge	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	comn s,	A1 uction of noditie raw erials	-A3 Product manufacture	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	С3	C4	D
Modules declared			Х	х	х	NR	NR	NR	NR	NR	NR	NR	х	Х	Х	Х	Х
Geography	Europ	е	Denmark					1		Euro	pe						
Process type	Upstro	eam	Processes the manufacture has influence over						D	ownst	ream						
Data type	Gener		Specific							Speci	fic						
Variation – products	in the imp L 25%	e largest act per d IP Rapid- adh variation	oduct, resulting environmental eclared unit is Setting Tile esive. n in GWP-GHG Rapid-Setting							-							





	• • •	<u> </u>	
	Tile adhesive and LIP Multi		
	Grout Manhattan.		
	26% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Multi		
	Grout Grey.		
	33% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Multi		
	Grout Antracite.		
	25% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Multi		
	Grout Jasmin.		
	25% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Multi		
	Grout Pearl.		
	25% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Multi		
	Grout Sand.		
	25% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Multi		
	Grout White.		
	28% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Multi		
	Grout Black.		
	11% variation in GWP-GHG		
	between LIP Rapid-Setting		
	Tile adhesive and LIP Natural		
	Stone Grout.		
Variation –	Manufactured in one site	-	
sites			

Product stage (A1-A3):

- A1-A2: extraction, supply and transport of raw materials and packaging to LIP Bygningsartikler A/S. Raw materials are purchased from European suppliers.
- A3: manufacturing process of product and its packaging and waste management from the same process. All the electricity comes from wind energy produced at Lindø Port with >3MW onshore wind turbines. Approximately 0.88MJ is used for the production of 1 kg product. A3 covers dosage and mixing of selected and measured raw materials and additives to ensure that the product meets desired properties and packaging material consumption. Packaging product materials consist of the bag material, wooden pallet and LDPE used as wrapping material. The wooden pallet is part of a return system, and therefore not a part of this study.



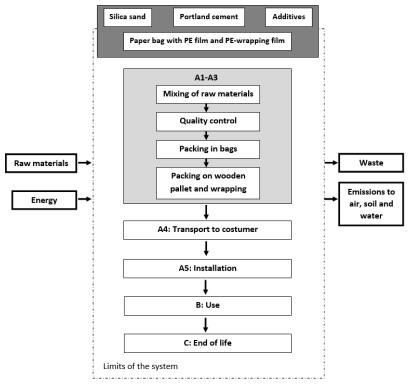


Figure 2: Limits of the system in this study.

Construction process stage (A4-A5):

- A4: distribution to typical Customer by transport of packaged product from production gate to end
 user (building site). The customers of LIP Bygningsartikler A/S are primarily from Denmark About 92
 percent of the products produced by LIP at the production site in Nørre Aaby in Denmark, are sold in
 Denmark, 4 percent in Sweden, 2 percent in Norway and 1 percent in both Germany and the
 Netherlands. The distance has in the present LCA study been estimated to be 500km via road
 transport by a Euro 6 lorry of 32 metric ton.
- A5: installation of product into building, including required water and its blending energy. For installation, water consumption can be found in table 1. Mixing electricity consumption is assumed to be 0.135 MJ/kg. This is equivalent to the use of a 1200-Watt handheld mixer for 3 minutes. We assume that there are no losses during installation. There is no sector specific standard for any losses or spillage. The product can be used in 12 months or 18 months. The electricity mix is modelled with European mix and it is considered as an adequate choice, but since more than 90% of the market is in Denmark, Danish residual mix would be a better choice to consider in this study's validity period of 5 years.

Use stage (B1-B7):

 B1 to B7 are not relevant (NR) as they are not applicable: the product does not need maintenance or replacement during its RSL. If professionally used and properly installed and according to LIP Bygningsartikler A/S experience, the Reference Service Life (RSL) of premade grouts has been known to be 50 years or longer.

End of life stage (C1-C4):

C1: deconstruction and demolition of the product into the building. Grouts for surface use are
typically not considered as part of the structure of the building. However, during the building
destruction, the quantity of extra energy required to break these applications can be neglected





compared to the energy required to demolish the structure of the building and are therefore not included in this LCA study.

- C2: transport of waste product from demolition to recycling/disposal facility that is waste collection. The distance is assumed to be 50 km via road transport by a Euro 6 lorry of 32 metric ton.
- C3: The product is expected to be disposed as landfill after end of life.
- C4: Waste disposal including physical pre-treatment.

D Reuse-Recovery-Recycling potential

Module D calculates the potential environmental benefits of the recycling or reuse of materials. This product has not considerable benefits due to recycling or/and reuse.

Environmental performance

All the environmental impacts have been calculated in SimaPro and with the EN 15804 + A2 Method, which takes all the methods defined by the European Standard EN 15804 + A2 into account.

All the LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.





LIP Multi Grout Manhattan

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 5: Core environmental impact results for the product LIP Multi Grout Manhattan

		R	esults per	declared u	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
GWP- total	kg CO₂ eq.	4,20E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0
GWP-fossil	kg CO₂ eq.	4,33E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0
GWP-biogenic	kg CO₂ eq.	-1,28E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0
GWP- luluc	kg CO₂ eq.	2,51E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0
ODP	kg CFC 11 eq.	2,42E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0
AP	mol H⁺ eq.	1,35E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0
EP-freshwater	kg PO ₄ 3- eq.	7,80E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0
	kg P eq.	2,54E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0
EP- marine	kg N eq.	3,18E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0
EP-terrestrial	mol N eq.	3,51E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0
POCP	kg NMVOC eq.	9,50E-04	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0
ADP-minerals&metals**	kg Sb eq.	4,25E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0
ADP-fossil**	MJ	3,10E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0
WDP **	m ³	7,81E-02	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0
Acronyms	GWP-fossil = Glo GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&r depletion for fo water consump	obal Warmin one layer; A potential, fra potential, fra potential, Ad metals = Abi ssil resource	ng Potential AP = Acidification of nusertion of nusertion of nusertion of nusertion of nusertion of nusertion depletion depletions.	land use and ation potentia trients reachi trients reachi Exceedance; on potential f	land al, Ad ng fr ng m POC	use comunication with the communication with	hange; ODP lated Excee ater end col end compa rmation pol ssil resource	= Dep dance mpart rtmer tentia s; ADI	pletion pote e; EP-freshw ment; EP-m nt; EP-terres I of tropospl P-fossil = Ab	ntial of the ater = arine = trial = heric ozone; iotic

Table 6: Additional environmental impact results for the product Multi Grout Manhattan

	Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D		
GWP-GHG	kg CO₂ eq.	4,39E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0		
PM	disease inc.	1,05E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0		
IRP*	kBq U235 eq	3,02E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0		
ETP-fw**	CTUe	6,00E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0		
HTP-c**	CTUh	1,20E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0		
HTP-nc**	CTUh	4,95E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0		
SQP**	Dimensionless	4,59E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0		
Acronyms	GWP-GHG: The carbon dioxide (equal to the GW	uptake and o /P indicator	emissions a originally de	nd biogenic ca efined in EN 1	arbo .580	n stor 4:201	ed in the pr 2+A1:2013.	oduct	. This indica	tor is thus		
	freshwater; HTP	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.										





Table 7: Resource use - LIP Multi Grout Manhattan

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D
PERE	MJ	5,38E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0
PERT	MJ	7,30E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PENRE	MJ	3,17E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
PENRM	MJ.	1,29E-01	0	0	0	0	0	0	0	0
PENRT	MJ	3,30E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
SM	kg	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0
FW	m3	6,98E-02	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0
Acronyms	PERE = Use of re materials; PERM renewable prim renewable prim energy resource SM = Use of sec secondary fuels	I = Use of re ary energy i ary energy i es used as ra ondary mat	enewable processine processing pr	imary energy ENRE = Use o sed as raw ma s; PENRT = To Use of renewa	reso f no iteria tal u	ources n-rene als; PE se of r	used as ravewable prime ENRM = Use non-renewa	v mat lary el of no ble pr	erials; PERT nergy exclud n-renewable imary energ	= Total use of ding non- e primary gy re-sources;

Waste production

At end of use, when the hardened product id demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 8: Waste - LIP Multi Grout Manhattan

Results per declared unit										
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
Hazardous waste disposed	kg	3,62E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0
Non-hazardous waste disposed	Non-hazardous waste disposed kg 2,77E-02 6,15E-02 1,13E-03 0 0 6,15E-03 0 1,00E+00 0									
Radioactive waste disposed	kg	1,42E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0

Output flows

Table 9: Output flows - LIP Multi Grout Manhattan

	Results per declared unit										
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D	
Components for re-use	kg	0	0	0	0	0	0	0	0	0	
Material for recycling	kg	0	0	9,00E-04	0	0	0	0	0	0	
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	
Exported energy, electricity	MJ	0	0	0	0	0	0	0	0	0	
Exported energy, thermal	MJ	0	0	0	0	0	0	0	0	0	

Information on biogenic carbon content

Table 10: Biogenic Carbon – LIP Multi Grout Manhattan

	Unit	Quantity							
Biogenic carbon content in product	kg C	<5%							
Biogenic carbon content in packaging	kg C	49%							
Results per functional or declared unit. Note: 1 kg biogenic carbon is eq	Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2.								





LIP Multi Grout Grey

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 11: Core environmental impact results for the product LIP Multi Grout Grey

Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D	
GWP- total	kg CO₂ eq.	4,17E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0	
GWP-fossil	kg CO₂ eq.	4,29E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0	
GWP-biogenic	kg CO₂ eq.	-1,28E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0	
GWP- luluc	kg CO₂ eq.	2,52E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0	
ODP	kg CFC 11 eq.	2,47E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0	
AP	mol H⁺ eq.	1,35E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0	
EP-freshwater	kg PO ₄ ³⁻ eq.	7,77E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0	
	kg P eq.	2,53E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0	
EP- marine	kg N eq.	3,19E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0	
EP-terrestrial	mol N eq.	3,52E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0	
POCP	kg NMVOC eq.	9,51E-04	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0	
ADP-minerals&metals**	kg Sb eq.	4,23E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0	
ADP-fossil**	MJ	3,08E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0	
WDP **	m ³	7,88E-02	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0	
Acronyms	GWP-fossil = Glo GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals& depletion for fo water consump	obal Warmin cone layer; A cotential, fra cotential, fra cotential, Ad metals = Abi ssil resource	ng Potential AP = Acidification of nusertion of nusertion of nusertion of nusertion of nusertion of nusertion depletion depletions.	land use and ation potentia trients reachi trients reachi Exceedance; on potential f	land al, Ad ng fr ng m POC or no	use comunication with the communication with	hange; ODP lated Excee ater end con end compa rmation po ssil resource	= Dependence mpart ertmentia tentia	oletion pote e; EP-freshw ment; EP-m nt; EP-terres I of tropospl P-fossil = Ab	ntial of the ater = arine = trial = heric ozone; iotic	

Table 12: Additional environmental impact results for the product LIP Multi Grout Grey

	Results per declared unit											
Indicator	Unit	A1-A3	Α4	A5	В	C1	C2	C3	C4	D		
GWP-GHG	kg CO₂ eq.	4,35E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0		
PM	disease inc.	1,05E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0		
IRP*	kBq U235 eq	2,98E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0		
ETP-fw**	CTUe	5,99E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0		
HTP-c**	CTUh	1,20E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0		
HTP-nc**	CTUh	4,89E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0		
SQP**	Dimensionless	4,59E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0		
Acronyms	GWP-GHG: The carbon dioxide of equal to the GW PM = Particulate freshwater; HTF Land use related	uptake and o /P indicator e Matter em r-c = Human	emissions and originally de hissions; IRP toxicity, can	nd biogenic ca efined in EN 1 = Ionizing rac	arbo 1580 diatio	n stor 4:201 on, hu	ed in the properties and the properties and the properties are seen are seen and the properties are seen ar	oduct ; ETP-	. This indicat	tor is thus		





Table 13: Resource use - LIP Multi Grout Grey

	Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D		
PERE	MJ	5,35E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0		
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0		
PERT	MJ	7,27E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0		
PENRE	MJ	3,14E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0		
PENRM	MJ.	1,29E-01	0	0	0	0	0	0	0	0		
PENRT	MJ	3,27E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0		
SM	kg	0	0	0	0	0	0	0	0	0		
RSF	MJ	0	0	0	0	0	0	0	0	0		
NRSF	MJ	0	0	0	0	0	0	0	0	0		
FW	m3	7,06E-02	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0		
Acronyms	PERE = Use of romaterials; PERN renewable prim renewable prim energy resource SM = Use of secondary fuels	I = Use of re lary energy re lary energy re les used as ra londary mat	enewable processine processing pr	imary energy ENRE = Use o sed as raw ma ; PENRT = To Use of renewa	resc f no iteria tal u	ources n-rene als; PE se of r	used as ravewable prim ENRM = Use non-renewa	v mate nary en of no ble pr	erials; PERT nergy exclud n-renewable imary energ	= Total use of ling non- e primary gy re-sources;		

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 14: Waste - LIP Multi Grout Grey

Results per declared unit										
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
Hazardous waste disposed	kg	3,63E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0
Non-hazardous waste disposed	kg	2,79E-02	6,15E-02	1,13E-03	0	0	6,15E-03	0	1,00E+00	0
Radioactive waste disposed	kg	1,40E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0

Output flows

Table 15: Output flows - LIP Multi Grout Grey

	Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D		
Components for re-use	kg	0	0	0	0	0	0	0	0	0		
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0		
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0		
Exported energy, electricity	MJ	0	0	0	0	0	0	0	0	0		
Exported energy, thermal	MJ	0	0	0	0	0	0	0	0	0		

Information on biogenic carbon content

Table 16: Biogenic Carbon - LIP Multi Grout Grey

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%





Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2.

LIP Multi Grout Antracite

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 17: Core environmental impact results for the product LIP Multi Grout Antracite

Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D	
GWP- total	kg CO₂ eq.	3,74E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0	
GWP-fossil	kg CO₂ eq.	3,87E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0	
GWP-biogenic	kg CO₂ eq.	-1,30E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0	
GWP- luluc	kg CO₂ eq.	2,36E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0	
ODP	kg CFC 11 eq.	2,49E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0	
AP	mol H⁺ eq.	1,29E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0	
EP-freshwater	kg PO ₄ 3- eq.	6,84E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0	
	kg P eq.	2,23E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0	
EP- marine	kg N eq.	3,11E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0	
EP-terrestrial	mol N eq.	3,46E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0	
POCP	kg NMVOC eq.	9,24E-04	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0	
ADP-minerals&metals**	kg Sb eq.	3,61E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0	
ADP-fossil**	MJ	2,72E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0	
WDP **	m³	7,83E-02	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0	
Acronyms	GWP-fossil = Glo GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&r depletion for fo water consump	obal Warmin cone layer; A cotential, fra cotential, fra cotential, Ad metals = Abi ssil resource	ng Potential AP = Acidification of nusertion of nusertion of nusertion of nusertion of nusertion of nusertion depletion depletions	land use and ation potentia trients reachi trients reachi Exceedance; on potential f	land al, Ad ng fr ng m POC or no	use comunication with the communication with	hange; ODP lated Excee ater end con end compa rmation por ssil resource	= Depote dance mpart rtmer tentials; ADI	pletion pote e; EP-freshw ment; EP-m nt; EP-terres I of tropospl P-fossil = Ab	ntial of the ater = arine = trial = heric ozone; iotic	

Table 18: Additional environmental impact results for the product LIP Multi Grout Antracite

	Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D		
GWP-GHG	kg CO₂ eq.	3,93E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0		
PM	disease inc.	1,05E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0		
IRP*	kBq U235 eq	2,40E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0		
ETP-fw**	CTUe	5,61E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0		
HTP-c**	CTUh	1,09E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0		
HTP-nc**	CTUh	4,08E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0		
SQP**	Dimensionless	4,47E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0		
Acronyms	carbon dioxide	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.										





PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Use of resources

Table 19: Resource use - LIP Multi Grout Antracite

	Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D		
PERE	MJ	4,82E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0		
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0		
PERT	MJ	6,74E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0		
PENRE	MJ	2,76E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0		
PENRM	MJ.	1,29E-01	0	0	0	0	0	0	0	0		
PENRT	MJ	2,89E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0		
SM	kg	0	0	0	0	0	0	0	0	0		
RSF	MJ	0	0	0	0	0	0	0	0	0		
NRSF	MJ	0	0	0	0	0	0	0	0	0		
FW	m3	7,05E-02	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0		
Acronyms	materials; PERN renewable prim renewable prim energy resource SM = Use of sec	m3 7,05E-02 2,34E-03 7,86E-03 0 0 2,34E-04 0 7,11E-03 0 PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water										

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 20: Waste - LIP Multi Grout Antracite

Results per declared unit										
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
Hazardous waste disposed	kg	3,43E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0
Non-hazardous waste disposed	kg	2,67E-02	6,15E-02	1,13E-03	0	0	6,15E-03	0	1,00E+00	0
Radioactive waste disposed	kg	1,18E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0

Output flows

Table 21: Output flows - LIP Multi Grout Antracite

Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D	
Components for re-use	kg	0	0	0	0	0	0	0	0	0	
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0	
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	
Exported energy, electricity	MJ	0	0	0	0	0	0	0	0	0	
Exported energy, thermal	MJ	0	0	0	0	0	0	0	0	0	

Information on biogenic carbon content





Table 22: Biogenic Carbon - LIP Multi Grout Antracite

	Unit	Quantity					
Biogenic carbon content in product	kg C	<5%					
Biogenic carbon content in packaging kg C 49%							
Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2.							

LIP Multi Grout Jasmin

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 23: Core environmental impact results for the product LIP Multi Grout Jasmin

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
GWP- total	kg CO₂ eq.	4,20E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0
GWP-fossil	kg CO₂ eq.	4,32E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0
GWP-biogenic	kg CO₂ eq.	-1,28E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0
GWP- luluc	kg CO₂ eq.	2,50E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0
ODP	kg CFC 11 eq.	2,40E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0
AP	mol H⁺ eq.	1,34E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0
EP-freshwater	kg PO₄³- eq.	7,77E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0
	kg P eq.	2,53E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0
EP- marine	kg N eq.	3,18E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0
EP-terrestrial	mol N eq.	3,50E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0
POCP	kg NMVOC eq.	9,48E-04	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0
ADP-minerals&metals**	kg Sb eq.	4,22E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0
ADP-fossil**	MJ	3,09E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0
WDP **	m³	7,77E-02	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0
Acronyms	GWP-fossil = Glo GWP-luluc = Glo stratospheric oz Eutrophication p Eutrophication p Eutrophication p ADP-minerals&r depletion for for water consumpt	obal Warmin one layer; A potential, fra potential, fra potential, Ac metals = Abi ssil resource	ng Potential AP = Acidification of nusertion of nusertion of nusertion of nusertion of nusertion of nusertion depletion depletions	land use and ation potentia trients reachi trients reachi Exceedance; on potential f	land al, Ad ng fr ng m POC or no	use c ccumu reshw narine P = Fo on-fos	hange; ODP lated Excee ater end cor end compa rmation pot ssil resource	= Deplication =	oletion pote e; EP-freshw ment; EP-m nt; EP-terres I of tropospl P-fossil = Ab	ntial of the ater = arine = trial = heric ozone; iotic

Table 24: Additional environmental impact results for the product LIP Multi Grout Jasmin

	Results per declared unit												
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D			
GWP-GHG	kg CO₂ eq.	4,39E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0			
PM	disease inc.	1,04E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0			
IRP*	kBq U235 eq	3,02E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0			
ETP-fw**	CTUe	5,99E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0			
HTP-c**	CTUh	1,20E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0			
HTP-nc**	CTUh	4,94E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0			
SQP**	Dimensionless	4,59E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0			





Acronyms	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.
	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Table 25: Resource use - LIP Multi Grout Jasmin

		R	esults per	declared ι	unit							
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D		
PERE	MJ	5,38E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0		
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0		
PERT	MJ	7,30E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0		
PENRE	MJ	3,16E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0		
PENRM	MJ	1,29E-01	0	0	0	0	0	0	0	0		
PENRT	MJ	MJ 3,29E+00 7,51E-01 3,49E-01 0 0 7,51E-02 0 1,62E-01 0										
SM	kg	0	0	0	0	0	0	0	0	0		
RSF	MJ	0	0	0	0	0	0	0	0	0		
NRSF	MJ	0	0	0	0	0	0	0	0	0		
FW	m3	6,94E-02	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0		
Acronyms	PERE = Use of re materials; PERM renewable prim renewable prim energy resource SM = Use of sec secondary fuels	enewable pr 1 = Use of re ary energy r ary energy r es used as ra ondary mate	imary energ newable pr esources; P esources us w materials erial; RSF = 1	y excluding reimary energy ENRE = Use o sed as raw ma s; PENRT = Tot Use of renewa	reso f no ateria tal u	vable ources n-rene als; PE se of r	primary end used as rav ewable prim NRM = Use non-renewa	ergy reverse reserved to the contract of the c	esources use erials; PERT nergy exclud n-renewable imary energ	= Total use of ling non- e primary sy re-sources;		

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 26: Waste - LIP Multi Grout Jasmin

Results per declared unit											
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D											
Hazardous waste disposed	kg	3,61E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0	
Non-hazardous waste disposed	kg	2,76E-02	6,15E-02	1,13E-03	0	0	6,15E-03	0	1,00E+00	0	
Radioactive waste disposed	kg	1,41E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0	

Table 27: Output flows - LIP Multi Grout Jasmin

	Results per declared unit											
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D												
Components for re-use	kg	0	0	0	0	0	0	0	0	0		
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0		
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0		
Exported energy, electricity	MJ	0	0	0	0	0	0	0	0	0		
Exported energy, thermal	MJ	0	0	0	0	0	0	0	0	0		





Table 28: Biogenic Carbon - LIP Multi Grout Jasmin

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%
Results per functional or declared unit. Note: 1 kg biogenic carbon is eq	uivalent to 44/1	2 kg CO2.

LIP Multi Grout Pearl

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 29: Core environmental impact results for the product LIP Multi Grout Pearl

		R	esults per	່ declared ເ	unit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
GWP- total	kg CO₂ eq.	4,20E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0
GWP-fossil	kg CO₂ eq.	4,32E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0
GWP-biogenic	kg CO₂ eq.	-1,28E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0
GWP- luluc	kg CO₂ eq.	2,50E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0
ODP	kg CFC 11 eq.	2,40E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0
AP	mol H⁺ eq.	1,34E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0
EP-freshwater	kg PO ₄ ³⁻ eq.	7,77E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0
	kg P eq.	2,53E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0
EP- marine	kg N eq.	3,18E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0
EP-terrestrial	mol N eq.	3,50E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0
POCP	kg NMVOC eq.	9,48E-04	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0
ADP-minerals&metals**	kg Sb eq.	4,22E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0
ADP-fossil**	MJ	3,09E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0
WDP **	m³	7,78E-02	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0
Acronyms	GWP-fossil = Glo GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&I depletion for fo water consump	obal Warmin one layer; A potential, fra potential, fra potential, Ad metals = Abi ssil resource	ng Potential AP = Acidification of nusertion of nusertion of nusertion of nusertion of nusertion of nusertion depletion depletions	land use and ation potentia trients reachi trients reachi Exceedance; on potential f	land al, Ad ng fr ng m POC for no	use comunication with the communication with	hange; ODP Ilated Excee ater end con end compa irmation po ssil resource	= Depote dance mpart ertmer tentia	oletion pote e; EP-freshw ment; EP-m nt; EP-terres I of tropospl P-fossil = Ab	ntial of the ater = arine = trial = heric ozone; iotic

Table 30: Additional environmental impact results for the product LIP Multi Grout Pearl

	Results per declared unit												
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D			
GWP-GHG	kg CO₂ eq.	4,39E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0			
PM	disease inc.	1,04E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0			
IRP*	kBq U235 eq	3,02E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0			
ETP-fw**	CTUe	5,99E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0			
HTP-c**	CTUh	1,20E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0			
HTP-nc**	CTUh	4,94E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0			
SQP**	Dimensionless	4,59E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0			





Acronyms	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.
	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Table 31: Resource use - LIP Multi Grout Pearl

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D
PERE	MJ	5,38E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0
PERT	MJ	7,30E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PENRE	MJ	3,16E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
PENRM	MJ	1,29E-01	0	0	0	0	0	0	0	0
PENRT	MJ	3,29E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
SM	kg	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0
FW	m3	6,95E-02	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0
Acronyms	PERE = Use of re materials; PERM renewable prim renewable prim energy resource SM = Use of sec secondary fuels	1 = Use of re ary energy i ary energy i s used as ra ondary mat	newable presources; Presources us w materials	imary energy ENRE = Use o sed as raw ma ;; PENRT = To Use of renewa	reso f no iteria tal u	ources n-rene als; PE se of i	used as ravewable prime ENRM = Use non-renewa	v mate nary en of no ble pr	erials; PERT nergy exclud n-renewable imary energ	= Total use of ling non- e primary sy re-sources;

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 32: Waste - LIP Multi Grout Pearl

Results per declared unit											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D	
Hazardous waste disposed	kg	3,61E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0	
Non-hazardous waste disposed	kg	2,76E-02	6,15E-02	1,13E-03	0	0	6,15E-03	0	1,00E+00	0	
Radioactive waste disposed	kg	1,41E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0	

Table 33: Output flows - LIP Multi Grout Pearl

	Results per declared unit									
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
Components for re-use	kg	0	0	0	0	0	0	0	0	0
Material for recycling	kg	0	0	6.00E-04	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0
Exported energy, electricity	MJ	0	0	0	0	0	0	0	0	0
Exported energy, thermal	MJ	0	0	0	0	0	0	0	0	0





Table 34: Biogenic Carbon - LIP Multi Grout Pearl

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%
Results per functional or declared unit. Note: 1 kg biogenic carbon is eq	uivalent to 44/1	2 kg CO2.

LIP Multi Grout Sand

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 35: Core environmental impact results for the product LIP Multi Grout Sand

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
GWP- total	kg CO₂ eq.	4,20E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0
GWP-fossil	kg CO₂ eq.	4,33E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0
GWP-biogenic	kg CO₂ eq.	-1,28E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0
GWP- luluc	kg CO₂ eq.	2,51E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0
ODP	kg CFC 11 eq.	2,40E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0
AP	mol H⁺ eq.	1,34E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0
EP-freshwater	kg PO ₄ ³⁻ eq.	7,78E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0
	kg P eq.	2,53E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0
EP- marine	kg N eq.	3,18E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0
EP-terrestrial	mol N eq.	3,50E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0
POCP	kg NMVOC eq.	9,49E-04	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0
ADP-minerals&metals**	kg Sb eq.	4,23E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0
ADP-fossil**	MJ	3,09E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0
WDP **	m³	7,78E-02	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0
Acronyms	GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&r	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted								

Table 36: Additional environmental impact results for the product LIP Multi Grout Sand

		R	esults per	declared u	unit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
GWP-GHG	kg CO₂ eq.	4,39E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0
PM	disease inc.	1,04E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0
IRP*	kBq U235 eq	3,02E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0
ETP-fw**	CTUe	5,99E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0
HTP-c**	CTUh	1,20E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0
HTP-nc**	CTUh	4,94E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0
SQP**	Dimensionless	4,59E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0





Acronyms	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.
	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Table 37: Resource use - LIP Multi Grout Sand

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D
PERE	MJ	5,38E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0
PERT	MJ	7,30E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PENRE	MJ	3,16E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
PENRM	MJ	1,29E-01	0	0	0	0	0	0	0	0
PENRT	MJ	3,29E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
SM	kg	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0
FW	m3	6,95E-02	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0
Acronyms	materials; PERN renewable prim renewable prim energy resource	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable								

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 38: Waste - LIP Multi Grout Sand

Results per declared unit										
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
Hazardous waste disposed	kg	3,61E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0
Non-hazardous waste disposed	kg	2,76E-02	6,15E-02	1,13E-03	0	0	6,15E-03	0	1,00E+00	0
Radioactive waste disposed	kg	1,41E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0

Table 39: Output flows - LIP Multi Grout Sand

	Results per declared unit									
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
Components for re-use	kg	0	0	0	0	0	0	0	0	0
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0
Exported energy, electricity	MJ	0	0	0	0	0	0	0	0	0
Exported energy, thermal	MJ	0	0	0	0	0	0	0	0	0





Table 40: Biogenic Carbon - LIP Multi Grout Sand

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%
Results per functional or declared unit. Note: 1 kg biogenic carbon is eq	uivalent to 44/1	2 kg CO2.

LIP Multi Grout White

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 41: Core environmental impact results for the product LIP Multi Grout White

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
GWP- total	kg CO₂ eq.	4,22E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0
GWP-fossil	kg CO₂ eq.	4,34E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0
GWP-biogenic	kg CO₂ eq.	-1,26E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0
GWP- luluc	kg CO₂ eq.	2,54E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0
ODP	kg CFC 11 eq.	2,56E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0
AP	mol H⁺ eq.	2,30E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0
EP-freshwater	kg PO ₄ 3- eq.	8,53E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0
	kg P eq.	2,78E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0
EP- marine	kg N eq.	3,63E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0
EP-terrestrial	mol N eq.	3,91E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0
POCP	kg NMVOC eq.	1,12E-03	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0
ADP-minerals&metals**	kg Sb eq.	3,92E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0
ADP-fossil**	MJ	3,28E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0
WDP **	m ³	1,37E-01	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0
Acronyms	GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&r	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted								

Table 42: Additional environmental impact results for the product LIP Multi Grout White

		R	esults per	declared u	unit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
GWP-GHG	kg CO₂ eq.	4,41E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0
PM	disease inc.	1,41E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0
IRP*	kBq U235 eq	2,92E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0
ETP-fw**	CTUe	6,90E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0
HTP-c**	CTUh	2,68E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0
HTP-nc**	CTUh	5,61E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0
SQP**	Dimensionless	4,82E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0





Acronyms	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.
	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Table 43: Resource use - LIP Multi Grout White

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	Α4	A5	В	C1	C2	C3	C4	D
PERE	MJ	5,53E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0
PERT	MJ	7,45E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PENRE	MJ	3,36E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
PENRM	MJ	1,29E-01	0	0	0	0	0	0	0	0
PENRT	MJ	3,49E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
SM	kg	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0
FW	m3	1,17E-01	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0
Acronyms	PERE = Use of re materials; PERM renewable prim renewable prim energy resource SM = Use of sec secondary fuels	1 = Use of re ary energy r ary energy r es used as ra ondary mate	newable presources; Presources us w materials	imary energy ENRE = Use o sed as raw ma ;; PENRT = To Use of renewa	reso f no ateria tal u	ources n-rene als; PE se of r	used as ravewable prime ENRM = Use non-renewa	v mate ary er of no ble pr	erials; PERT nergy exclud n-renewable imary energ	= Total use of ling non- e primary gy re-sources;

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 44: Waste - LIP Multi Grout White

	Results per declared unit											
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D												
Hazardous waste disposed	kg	3,84E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0		
Non-hazardous waste disposed	Non-hazardous waste disposed kg 6,58E-02 6,15E-02 1,13E-03 0 0 6,15E-03 0 1,00E+00 0											
Radioactive waste disposed kg 1,41E-05 4,83E-06 2,36E-06 0 0 4,83E-07 0 9,91E-07 0												

Table 45: Output flows - LIP Multi Grout White

	Results per declared unit											
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D												
Components for re-use	kg	0	0	0	0	0	0	0	0	0		
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0		
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0		
Exported energy. electricity	MJ	0	0	0	0	0	0	0	0	0		
Exported energy. thermal	MJ	0	0	0	0	0	0	0	0	0		





Table 46: Biogenic Carbon - LIP Multi Grout White

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%
Results per functional or declared unit. Note: 1 kg biogenic carbon is eq	uivalent to 44/1	2 kg CO2.

LIP Multi Grout Black

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 47: Core environmental impact results for the product LIP Multi Grout Black

		R	esults per	declared ι	ınit						
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D	
GWP- total	kg CO₂ eq.	4,01E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0	
GWP-fossil	kg CO₂ eq.	4,14E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0	
GWP-biogenic	kg CO₂ eq.	-1,33E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0	
GWP- luluc	kg CO₂ eq.	2,93E-04	1,33E-05	3,75E-05	0	0	1,33E-06	0	1,65E-06	0	
ODP	kg CFC 11 eq.	3,89E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0	
AP	mol H⁺ eq.	1,50E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0	
EP-freshwater	kg PO ₄ 3- eq.	8,81E-05	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0	
	kg P eq.	2,87E-05	1,05E-06	5,27E-06	0	0	1,05E-07	0	1,96E-07	0	
EP- marine	kg N eq.	3,52E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0	
EP-terrestrial	mol N eq.	3,87E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0	
POCP	kg NMVOC eq.	1,04E-03	1,34E-04	3,75E-05	0	0	1,34E-05	0	6,31E-05	0	
ADP-minerals&metals**	kg Sb eq.	5,00E-06	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0	
ADP-fossil**	MJ	3,19E+00	7,07E-01	3,32E-01	0	0	7,07E-02	0	1,52E-01	0	
WDP **	m³	1,01E-01	2,30E-03	1,23E-02	0	0	2,30E-04	0	6,95E-03	0	
Acronyms	GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&i	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted									

Table 48: Additional environmental impact results for the product LIP Multi Grout Black

	Results per declared unit												
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D			
GWP-GHG	kg CO₂ eq.	4,20E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0			
PM	disease inc.	1,22E-08	3,82E-09	2,76E-10	0	0	3,82E-10	0	1,14E-09	0			
IRP*	kBq U235 eq	2,87E-02	3,60E-03	8,79E-03	0	0	3,60E-04	0	6,82E-04	0			
ETP-fw**	CTUe	6,57E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0			
HTP-c**	CTUh	1,35E-10	1,37E-11	6,04E-12	0	0	1,37E-12	0	5,96E-12	0			
HTP-nc**	CTUh	4,88E-09	6,19E-10	2,05E-10	0	0	6,19E-11	0	1,31E-10	0			
SQP**	Dimensionless	4,61E+00	8,10E-01	8,12E-02	0	0	8,10E-02	0	3,13E-01	0			





Acronyms	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.
	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Table 49: Resource use - LIP Multi Grout Black

		R	esults per	declared ເ	ınit						
Indicator	Unit	A1-A3	Α4	A5	В	C1	C2	C3	C4	D	
PERE	MJ	5,34E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0	
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0	
PERT	MJ	7,26E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0	
PENRE	MJ	3,26E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0	
PENRM	MJ	1,29E-01	0	0	0	0	0	0	0	0	
PENRT	MJ	3,39E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0	
SM	kg	0	0	0	0	0	0	0	0	0	
RSF	MJ	0	0	0	0	0	0	0	0	0	
NRSF	MJ	0	0	0	0	0	0	0	0	0	
FW	m3	9,34E-02	2,34E-03	7,86E-03	0	0	2,34E-04	0	7,11E-03	0	
Acronyms	materials; PERM renewable prim renewable prim energy resource	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable									

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 50: Waste - LIP Multi Grout Black

Results per declared unit											
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D											
Hazardous waste disposed	kg	4,34E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0	
Non-hazardous waste disposed	Non-hazardous waste disposed kg 3,47E-02 6,15E-02 1,13E-03 0 0 6,15E-03 0 1,00E+00 0										
Radioactive waste disposed											

Table 51: Output flows - LIP Multi Grout Black

	Results per declared unit											
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D												
Components for re-use	kg	0	0	0	0	0	0	0	0	0		
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0		
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0		
Exported energy. electricity	MJ	0	0	0	0	0	0	0	0	0		
Exported energy. thermal	MJ	0	0	0	0	0	0	0	0	0		





Table 52: Biogenic Carbon - LIP Multi Grout Black

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%
Results per functional or declared unit. Note: 1 kg biogenic carbon is eq	uivalent to 44/1	2 kg CO2.

LIP Natural Stone Grout

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 53: Core environmental impact results for the product LIP Natural Stone Grout

		R	esults per	declared ι	ınit						
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D	
GWP- total	kg CO₂ eq.	4,95E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0	
GWP-fossil	kg CO₂ eq.	5,11E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0	
GWP-biogenic	kg CO₂ eq.	-1,64E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0	
GWP- luluc	kg CO₂ eq.	3,72E-04	1,33E-05	3,76E-05	0	0	1,33E-06	0	1,65E-06	0	
ODP	kg CFC 11 eq.	3,94E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0	
AP	mol H⁺ eq.	2,51E-03	1,40E-04	9,45E-05	0	0	1,40E-05	0	5,45E-05	0	
EP-freshwater	kg PO ₄ 3- eq.	1,14E-04	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0	
	kg P eq.	3,72E-05	1,05E-06	5,28E-06	0	0	1,05E-07	0	1,96E-07	0	
EP- marine	kg N eq.	4,57E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0	
EP-terrestrial	mol N eq.	5,40E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0	
POCP	kg NMVOC eq.	1,48E-03	1,34E-04	3,76E-05	0	0	1,34E-05	0	6,31E-05	0	
ADP-minerals&metals**	kg Sb eq.	2,26E-05	7,75E-07	1,20E-07	0	0	7,75E-08	0	5,49E-08	0	
ADP-fossil**	MJ	6,81E+00	7,07E-01	3,33E-01	0	0	7,07E-02	0	1,52E-01	0	
WDP **	m³	2,52E-01	2,30E-03	1,45E-02	0	0	2,30E-04	0	6,95E-03	0	
Acronyms	GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&r depletion for fo	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted									
	water consumption										

Table 54: Additional environmental impact results for the product LIP Natural Stone Grout

	Results per declared unit													
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D				
GWP-GHG	kg CO₂ eq.	5,19E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0				
PM	disease inc.	2,15E-08	3,82E-09	2,77E-10	0	0	3,82E-10	0	1,14E-09	0				
IRP*	kBq U235 eq	3,19E-02	3,60E-03	8,80E-03	0	0	3,60E-04	0	6,82E-04	0				
ETP-fw**	CTUe	9,56E+00	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0				
HTP-c**	CTUh	2,36E-10	1,37E-11	6,09E-12	0	0	1,37E-12	0	5,96E-12	0				
HTP-nc**	CTUh	7,17E-09	6,19E-10	2,06E-10	0	0	6,19E-11	0	1,31E-10	0				
SQP**	Dimensionless	5,75E+00	8,10E-01	8,13E-02	0	0	8,10E-02	0	3,13E-01	0				





Acronyms	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.
	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Table 55: Resource use - LIP Natural Stone Grout

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D
PERE	MJ	6,72E-01	8,90E-03	6,30E-02	0	0	8,90E-04	0	1,35E-03	0
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0
PERT	MJ	8,64E-01	8,90E-03	6,30E-02	0	0	8,90E-04	0	1,35E-03	0
PENRE	MJ	5,60E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
PENRM	MJ	1,69E+00	0	0	0	0	0	0	0	0
PENRT	MJ	7,29E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
SM	kg	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0
FW	m3	2,37E-01	2,34E-03	8,89E-03	0	0	2,34E-04	0	7,11E-03	0
Acronyms	PERE = Use of re materials; PERM renewable prim renewable prim energy resource SM = Use of sec secondary fuels	1 = Use of re ary energy r ary energy r s used as ra ondary mat	enewable processine processing pr	imary energy ENRE = Use o sed as raw ma ;; PENRT = To Use of renewa	resc f no iteria tal u	ources n-rene als; PE se of r	used as ravewable prim SNRM = Use non-renewa	v mate nary en of no ble pr	erials; PERT nergy exclud n-renewable imary energ	= Total use of ling non- e primary gy re-sources;

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 56: Waste - LIP Natural Stone Grout

	Results per declared unit											
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D												
Hazardous waste disposed	kg	6,90E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0		
Non-hazardous waste disposed	kg	5,27E-02	6,15E-02	1,14E-03	0	0	6,15E-03	0	1,00E+00	0		
Radioactive waste disposed	kg	1,58E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0		

Table 57: Output flows - LIP Natural Stone Grout

		F	Results pe	r declared i	ınit			Results per declared unit												
Indicator Unit A1-A3 A4 A5 B C1 C2 C3 C4 D																				
Components for re-use	kg	0	0	0	0	0	0	0	0	0										
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0										
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0										
Exported energy. electricity	MJ	0	0	0	0	0	0	0	0	0										
Exported energy. thermal	MJ	0	0	0	0	0	0	0	0	0										





Table 58: Biogenic Carbon - LIP Natural Stone Grout

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%
Results per functional or declared unit. Note: 1 kg biogenic carbon is eq	uivalent to 44/1	2 kg CO2.

LIP Rapid-setting Tile Adhesive

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 59: Core environmental impact results for the product LIP Rapid-setting Tile Adhesive

		R	esults per	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D
GWP- total	kg CO₂ eq.	5,62E-01	4,36E-02	1,67E-02	0	0	4,36E-03	0	3,19E-02	0
GWP-fossil	kg CO₂ eq.	5,77E-01	4,35E-02	1,62E-02	0	0	4,35E-03	0	6,86E-03	0
GWP-biogenic	kg CO₂ eq.	-1,59E-02	3,30E-05	4,85E-04	0	0	3,30E-06	0	2,50E-02	0
GWP- luluc	kg CO₂ eq.	4,14E-04	1,33E-05	3,76E-05	0	0	1,33E-06	0	1,65E-06	0
ODP	kg CFC 11 eq.	4,54E-08	1,07E-08	1,36E-09	0	0	1,07E-09	0	2,23E-09	0
AP	mol H⁺ eq.	2,76E-03	1,40E-04	9,44E-05	0	0	1,40E-05	0	5,45E-05	0
EP-freshwater	kg PO ₄ 3- eq.	1,33E-04	3,22E-06	1,62E-05	0	0	3,22E-07	0	6,02E-07	0
	kg P eq.	4,34E-05	1,05E-06	5,28E-06	0	0	1,05E-07	0	1,96E-07	0
EP- marine	kg N eq.	4,97E-04	3,13E-05	1,55E-05	0	0	3,13E-06	0	2,64E-05	0
EP-terrestrial	mol N eq.	5,84E-03	3,42E-04	1,48E-04	0	0	3,42E-05	0	2,07E-04	0
POCP	kg NMVOC eq.	1,57E-03	1,34E-04	3,76E-05	0	0	1,34E-05	0	6,31E-05	0
ADP-minerals&metals**	kg Sb eq.	2,62E-05	7,75E-07	1,19E-07	0	0	7,75E-08	0	5,49E-08	0
ADP-fossil**	MJ	6,98E+00	7,07E-01	3,33E-01	0	0	7,07E-02	0	1,52E-01	0
WDP **	m³	2,66E-01	2,30E-03	1,41E-02	0	0	2,30E-04	0	6,95E-03	0
Acronyms	GWP-fossil = Glo GWP-luluc = Glo stratospheric oz Eutrophication Eutrophication Eutrophication ADP-minerals&r depletion for fo water consump	obal Warmin cone layer; A cotential, fra cotential, fra cotential, Ad metals = Abi ssil resource	ng Potential AP = Acidification of nu action of nu action of nu ccumulated otic depletion	land use and ation potentia trients reachi trients reachi Exceedance; on potential f	land al, Ad ing fr ng m POC	use c ccumu eshw narine P = Fo on-fos	hange; ODP ulated Excee ater end con end compa ermation pot ssil resource	= De dance mpart rtmer tentia	pletion pote e; EP-freshw ment; EP-m nt; EP-terres I of troposp P-fossil = Ab	ntial of the rater = arine = strial = heric ozone; iotic

Additional environmental impact indicators

Table 60: Additional environmental impact results for the product LIP Rapid-setting Tile Adhesive

	Results per declared unit													
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D				
GWP-GHG	kg CO₂ eq.	5,85E-01	4,38E-02	1,63E-02	0	0	4,38E-03	0	2,93E-03	0				
PM	disease inc.	2,32E-08	3,82E-09	2,77E-10	0	0	3,82E-10	0	1,14E-09	0				
IRP*	kBq U235 eq	3,91E-02	3,60E-03	8,80E-03	0	0	3,60E-04	0	6,82E-04	0				
ETP-fw**	CTUe	1,05E+01	5,63E-01	2,28E-01	0	0	5,63E-02	0	1,38E-01	0				
HTP-c**	CTUh	2,64E-10	1,37E-11	6,08E-12	0	0	1,37E-12	0	5,96E-12	0				
HTP-nc**	CTUh	8,64E-09	6,19E-10	2,06E-10	0	0	6,19E-11	0	1,31E-10	0				
SQP**	Dimensionless	6,14E+00	8,10E-01	8,13E-02	0	0	8,10E-02	0	3,13E-01	0				





Acronyms	GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.
	PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality.

Table 61: Resource use - LIP Rapid-setting Tile Adhesive

		R	esults pei	declared ι	ınit					
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	С3	C4	D
PERE	MJ	7,43E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PERM	MJ	1,92E-01	0	0	0	0	0	0	0	0
PERT	MJ	9,35E-01	8,90E-03	6,29E-02	0	0	8,90E-04	0	1,35E-03	0
PENRE	MJ	6,01E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
PENRM	MJ	1,47E+00	0	0	0	0	0	0	0	0
PENRT	MJ	7,47E+00	7,51E-01	3,49E-01	0	0	7,51E-02	0	1,62E-01	0
SM	kg	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0
FW	m3	2,51E-01	2,34E-03	8,68E-03	0	0	2,34E-04	0	7,11E-03	0
Acronyms	PERE = Use of re materials; PERM renewable prim renewable prim energy resource SM = Use of sec secondary fuels	1 = Use of re ary energy i ary energy i s used as ra ondary mat	newable presources; Presources us w materials	imary energy ENRE = Use o sed as raw ma ;; PENRT = To Use of renewa	reso f no iteria tal u	ources n-rene als; PE se of i	used as ravewable prime SNRM = Use non-renewa	v mate nary en of no ble pr	erials; PERT nergy exclud n-renewable imary energ	= Total use of ling non- e primary sy re-sources;

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material are also assumed to be non-hazardous waste.

Table 62: Waste - LIP Rapid-setting Tile Adhesive

Results per declared unit												
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D		
Hazardous waste disposed	kg	7,78E-06	1,72E-06	2,23E-07	0	0	1,72E-07	0	2,31E-07	0		
Non-hazardous waste disposed	kg	6,00E-02	6,15E-02	1,14E-03	0	0	6,15E-03	0	1,00E+00	0		
Radioactive waste disposed	kg	1,85E-05	4,83E-06	2,36E-06	0	0	4,83E-07	0	9,91E-07	0		

Table 63: Output flows - LIP Rapid-setting Tile Adhesive

	Results per declared unit											
Indicator												
Components for re-use	kg	0	0	0	0	0	0	0	0	0		
Material for recycling	kg	0	0	6,00E-04	0	0	0	0	0	0		
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0		
Exported energy. electricity	MJ	0	0	0	0	0	0	0	0	0		
Exported energy. thermal	MJ	0	0	0	0	0	0	0	0	0		





Table 64: Biogenic Carbon - LIP Rapid-setting Tile Adhesive

	Unit	Quantity
Biogenic carbon content in product	kg C	<5%
Biogenic carbon content in packaging	kg C	49%
Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2.		

Additional information

Fossil free energy:

LIP Bygningsartikler A/S has used fossil free energy since 2014. Today, the energy is delivered from the wind turbine power plant at LINDØ port of Odense from Energy Fyn. The total energy consumption on the site is equivalent to 919MWh per year.



Information related to Sector EPD

This is an individual EPD.

Differences versus previous versions

This is the first version of the EPD.

References

Project Report - LIP Grouts, LIP Bygningsartikler A/S, 2021

General Programme Instruction of the International EPD® System. Version 4.01.

ISO 14025:2010 Environmental labels and declarations-Type III Environmental Declarations-Principles and procedures

ISO 14040:2006 Environmental management-Life Cycle Assessment-Principles and framework

ISO 14044:2006 Environmental management-Life Cycle Assessment-Requirements and guidelines

PCR 2019:14 Construction products (EN 15804:A2) version 1.11

EN 15804:2012+A2:2019 Sustainability of construction works-Environmental Product Declarations-Core rules for the product category of construction products

EN 12004:2007+A1:2012 for interior and exterior bonding of ceramic tiles, porcelain, natural stone and mosaics on floors and walls.

DS/EN 13888 (Grout wall plasters for ceramic tiles - Requirements, conformity assessment, classification and designations).

Programme-related information and verification

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.

	The International EPD® System
Programme:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden www.environdec.com





	info@environdec.com
EPD registration number:	S-P-04249
Published:	2021-11-02
Valid until:	2026-10-28

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product category rules (PCR): PCR 2019:14 Construction products (EN 15804:A2) Version 1.11
PCR review was conducted by: The Technical Committee of the International EPD® System. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact
Independent third-party verification of the declaration and data, according to ISO 14025:2006:
☐ EPD process certification ☑ EPD verification
Third party verifier: Camilla Landén, Bureau Veritas Certification Sverige AB
Accredited by: SWEDAC
Procedure for follow-up of data during EPD validity involves third party verifier:
□ Yes ☑ No

Contact information

EPD owner

LIP Bygningsartikler A/S

Industrivej 16

5580, Nørre Aaby, Danmark

info@lip.dk www.lip.dk



^{*}Disclaimer: This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

^{**}Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.





Bureau Veritas HSE, Danmark

Odyssefs Papagiannidis

Oldenborgsgade 25-31

7000, Fredericia, Danmark

www.bvhse.dk

infohse@dk.bureauveritas.com



Programme operator

LCA author

the International EPD® System

www.environdec.com



THE INTERNATIONAL EPD® SYSTEM

Bureau Veritas Certification

Sverige AB 3rd party verifiers

Camilla Landen

Fabriksgatan 13,

412 50, Göteborg, Sweden

https://www.bureauveritas.se/

