





ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 for

Mapecoat ACT 021











1. COMPANY DESCRIPTION / GOAL & SCOPE

Founded in 1937 in Milan, Italy, Mapei produces adhesives and complementary products for laying all types of floor, wall and coating materials, and also specializes in other chemical products used in the building industry, such as waterproofing products, specialty mortars, admixtures for concrete, products for underground constructions and for the restoration of concrete and historical buildings.

There are currently 81 subsidiaries in the Mapei Group, with a total of 73 production facilities located around the world in 34 different countries and in 5 different continents. Mapei also has 18 central laboratories. Most locations are ISO 9001 and ISO 14001 or EMAS-certified.

Mapei's strategy of internationalization is based on two main objectives: being closer to local needs and lowering transportation costs. With the declared objective of being close to buyers and clients, Mapei's presence in the five continents enables the company to comply with the requirements of each location, and to use only locally-based managers and qualified personnel, without changing the approach of Mapei.

Mapei invests 12% in its company's total work-force and 5% of its turnover in Research & Development; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products, which give important contribution to all major green rating systems for eco-sustainable buildings such as LEED and BREEAM.

Furthermore, Mapei has developed a sales and technical service network with offices all over the world and offers an efficient Technical Assistance Service that is valued by architects, engineers, contractors and owners.

Mapei Italian plants are located in Robbiano di Mediglia, Latina and Sassuolo.

The goal of the study is to provide necessary data and documentation to produce an EPD according to the requirements of PCR under EN 15804:2014 and PCR Environdec, version 2.2, date 2017-05-30 and to have more comprehension about the environmental impacts related to **Mapecoat ACT 021** manufactured in Mapei S.p.A. located in Robbiano di Mediglia (MI-ITALY), including packaging of the finished products.

Target audiences of the study are customers and other parties with an interest in the environmental impacts of **Mapecoat ACT 021**.

This analysis shall not support comparative assertions intended to be disclosed to the public.





2. PRODUCT DESCRIPTION

Mapecoat ACT 021 is a semi-gloss enamel for interior walls, suitable for the use in food and beverage environments, mould resistant and with an excellent cleanability. The product studied is supplied in buckets with 4 kg or 16 kg of paint, put on wooden pallet and wrapped with LDPE.



3. CONTENT DECLARATION

The main components and ancillary materials of the product studied are the following:

Table 1: Composition	
Materials	Percentage (%)
Polymer dispersions	50 ÷ 70
Fillers	0 ÷ 10
Biocides	<1
Pigments	15 ÷ 25
Water	5 ÷ 10
Other (additives & packaging)	< 5

Mapecoat ACT 021 contains no substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency in a concentration more than 0,1 % (by unit weight).

4. DECLARED UNIT AND REFERENCE SERVICE LIFE

The declared unit is 1 kg of coating (packaging included).

Packaging materials include:

- Wooden pallet
- Polypropylene bucket
- LDPE for wrapping

The consumption of Mapecoat ACT 021 is beetwen 0,2-0,3 kg/m², as reported in TDS (Technical Data Sheet). According to the system boundary applied the RSL is not specified in this study.







5. SYSTEM BOUNDARIES & ADDITIONAL TECHNICAL INFORMATION

The approach is "cradle to gate". The following modules have been considered:

 A1-A3 (Product stage): extraction and transport of raw materials, packaging included, production process.

Table 2: System boundaries

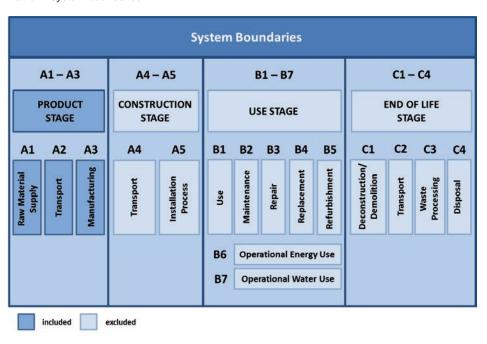


Figure 1: Mediglia Plant



A brief description of production process, is the following:

The production process starts from raw materials, that are purchased from external and intercompany suppliers and stored in the plant. Bulk raw materials are stored in specific silos and added automatically in the production mixer, according to the formula of the product. Other raw materials, supplied in bags, big bags or tanks, are stored in the warehouse and added automatically or manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches. The semi-finished product is then packaged in buckets, put on wooden pallets, covered by stretched hoods and stored in the finished products warehouse. The quality of final products is controlled before the sale.

Figure 2: Production process detail







6. CUT-OFF RULES & ALLOCATION

Criteria for the exclusion of inputs and outputs (cut-off rules) in the LCA, information modules and any additional information are intended to support an efficient calculation procedure. They are not applied in order to hide data. The procedure of exclusion of inputs and outputs is the following:

- All inputs and outputs to a unit process, for which data are available, are included in the calculation;
- Less than 1% of the total mass inputs/outputs of the unit process A3 are cut-off (see Table 3).

Input flows are covered for the whole formula.

Table 3: Cut-off criteria		
Process excluded from study	Cut-off criteria	Quantified contribution from process
A3: production (auxiliary materials)	less than 10 ⁻⁵ kg/kg of finished product	Sensibility study demonstrates a contribute lower than 0,5%
A3: waste	less than 10 ⁻⁵ kg/kg of finished product	Sensibility study demonstrates a contribute lower than 0,5%

For the allocation procedure and principles, consider the following table (Table 4):

Table 4: Allocation procedure and principles

Module	Allocation Principle
A1	All data are referred to 1 kg of product • A1: electricity is allocated to the coating department
A3	All data are referred to 1 kg of packaged product A3-wastes: all data are allocated to the whole plant production



7. ENVIRONMENTAL PERFORMANCE & INTERPRETATION



GWP₁₀₀

Global Warming Potential refers to the emission/presence of GHGs (greenhouse gases) in the atmosphere (mainly CO_2 , N_2O , CH_4) which contribute to the increase in the temperature of the planet.



AP

Acidification Potential refers to the emission of specific acidifying substances (i.e. NOx, SOx) in the air. These substances decrease the pH of the rainfall with predictable damages to the ecosystem.



EP

Eutrophication Potential refers to the nutrient enrichment of flowing water, which determines unbalance in aquatic ecosystems and causes the death of the aquatic fauna.



ODP

Ozone Depletion Potential refers to the degradation of the stratospheric layer of the ozone involved in blocking the UV component of sunrays. Depletion is due to particularly reactive components that originate from chlorofluorocarbon (CFC) or chlorofluoromethanes (CFM).



POCP

The Photochemical Ozone Creation Potential is the ozone formation in low atmosphere. This is quite common in the cities where a great amount of pollutants (like VOC and NOx) are emitted every day (industrial emissions and vehicles). It is mainly diffused during the summertime.



ADP_e (elements)

Abiotic Depletion Potential elements refers to the depletion of the mineral resources.



ADP_f (fossil fuel)

Abiotic Depletion Potential fossil fuel refers to the depletion of the fossil fuel resources.







Following tables show environmental impacts for the products considered according to CML methodology (2010 - Jan2016).

Table 5: Mapecoat ACT 021: Environmental categories

System boundary			Upstream + core
	Modules	Unit	A1-A3
Wy.	GWP ₁₀₀	${ m kg~CO}_2{ m eq}.$	2,17E+00
	ADP _e (element)	kg Sb eq.	9,43E-03
	ADP _f (fossil)	MJ	4,46E+01
	АР	${ m kg~SO}_2{ m eq}.$	3,96E-02
	EP	kg (PO₄)³- eq.	1,30E-03
	ODP	kg R-11 eq.	2,15E-06
555555	POCP	kg ethylene eq.	1,94E-03

GWP₁₀₀: Global Warming Potential; ADPe: Abiotic Depletion Potential (elements); EP: Eutrophication Potential; AP: Acidification Potential; POCP: Photochemical Ozone Creation Potential; ODP: Ozone Depletion Potential; ADPf: Abiotic Depletion Potential (fossil)

Table 6: Mapecoat ACT 021: Other environmental indicators

System k	ooundary	Upstream + core
Parameter	Unit	A1-A3
RPEE	MJ	1,63E+00
RPEM	MJ	-
TPE	MJ	1,63E+00
NRPE	MJ	4,70E+01
NRPM	MJ	-
TRPE	MJ	4,70E+01
SM	kg	-
RSF	MJ	-
NRSF	MJ	-
W	m³	2,77E-03

RPEE Renewable primary energy as energy carrier; RPEM Renewable primary energy as material utilisation; TPE Total use of renewable primary energy sources; NRPE Non-renewable primary energy as energy carrier; NRPM Non-renewable primary energy as material utilization; TRPE Total use of non-renewable primary energy sources; SM Use of secondary materials; RSF Renewable secondary fuels; NRSF Non-renewable secondary fuels; W Net use of fresh water [total freshwater consumption]

Table 7: Mapecoat ACT 021: Waste production & other output flows

System boundary		Upstream + core
Parameter	Unit	A1-A3
NHW	kg	5,23E-03
HW	kg	2,89E-06
RW	kg	0,00E+00
Components for re-use	kg	-
Materials for recycling	kg	-
Materials for energy recovery	kg	-
Exported energy	MJ	-
HW Hazardous waste disposed; NHW Non Hazardous waste disposed; RW Radioactive waste disposed		

EPD®






Tables above (from 5 to 7) and the following histogram (Table 8) show absolute results and relative contributions for the environmental categories considered in this EPD. The module A1 (raw materials extraction and processing) has the greatest contribution for all the environmental categories included in this study (up to 99%).

Considering ODP and ADPe, module A1 highlights a relative contribution close to 100%.


In Table 9, a GWP₁₀₀ detail shows that polymeric dispersions and pigments give a significant contribution; also biocides have a remarkable importance even though they are included in the formula with a relative weight lower than 1%.

Both packaging materials and the electricity consumption used for the manufacturing process give to module A3 a relative contribution between 5% to 15%, according to the environmental category considered.

The module A2 (raw materials transportation) gives a negative contribution to POCP due to the NO and NO_2 emission factors (for more details, see the methodology used: CML2001 – Jan2016).

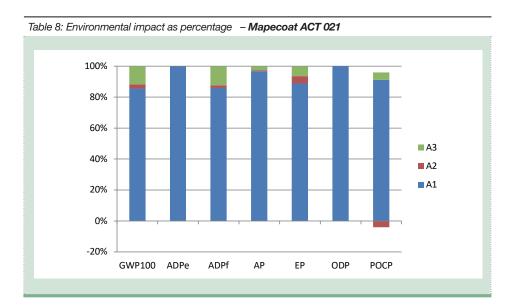

MAPEI

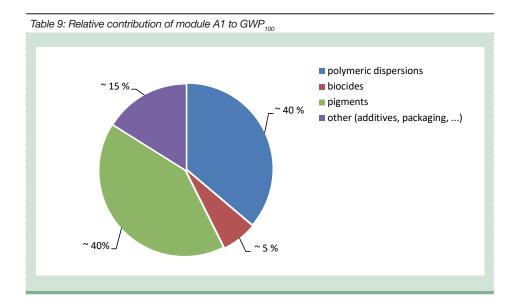

More details about electrical mixes used in this EPD are shown below:

	Data source	Amount	Unit
Electricity grid mix (IT) – 2013	GaBi database	0,4290	kg CO ₂ -eqv/kWh
Electricity from photovoltaic (IT) - 2013	GaBi database	0,0512	kg CO ₂ -eqv/kWh





8. DATA QUALITY

	,	
Table 10: Data quality		
Dataset & Geographical reference	Database (source)	Temporary reference
	A1; A3	
Fillers (EU)	GaBi Database	2016
Additives (EU)	GaBi Database; ecoinvent 3.3	2010 – 2016
EPDLA Life Cycle Inventory of Polymer Dispersions (EU)	EcoProfile EPDLA	2015
Electricity grid mix (IT)	GaBi Database	2013
Electricity from photovoltaic (IT)	GaBi Database	2013
Other (ex. Packaging components)	GaBi Database, ecoinvent 3.3, PlasticEurope	2005 – 2016
A2		
Truck transport (euro 3, 27 ton payload – GLO)	GaBi Database	2016
Diesel for transport (EU)	GaBi Database	2013

All data included in table above refer to a period between 2005 and 2016; the most relevant ones are specific from supplier, while the others (i.e. transport and minor contribution dataset) come from European and global databases.

All dataset are not more than 10 years old (according to EN 15804 § 6.3.7 "Data quality requirements"). Unique exception is due to one packaging component coming from PlasticEurope database.

Primary data are about the year 2016 and represent the entire annual production.



9. VERIFICATION AND REGISTRATION

EPD of construction products may not be comparable if they do not comply with EN 15804

Environmental product declarations within the same product category from different programs may not be comparable

CEN standard EN15804 contenente le PCR		
PCR:	PCR 2012:01 Construction products and Construction services, Version 2.2, 2017-05-30	
PCR review was conducted by:	The Technical Committee of the International EPD® System. Chair: Massimo Marino Contact via info@environdec.com	
Independent verification of the declaration and data, according to ISO 14025	☑ EPD Process Certification (Internal)☐ EPD Verification (external)	
Third party verifier:	Certiquality S.r.l. Number of accreditation: 003H rev14	
Accredited or approved by:	Accredia	

10. REFERENCES

- GENERAL PROGRAMME INSTRUCTIONS OF THE INTERNATIONAL EPD® SYSTEM. VERSION 3.0
- PCR 2012:01; "PRODUCT GROUP CLASSIFICATION: MULTIPLE UN CPC CODES CONSTRUCTION PRODUCTS AND CONSTRUCTION SERVICES"; VERSION 2.2
- EN 15804: SUSTAINABILITY OF CONSTRUCTION WORKS,
 ENVIRONMENTAL PRODUCT DECLARATIONS, CORE RULES FOR THE PRODUCT CATEGORY OF CONSTRUCTION PRODUCTS
- ISO 14025: ENVIRONMENTAL LABELS AND DECLARATIONS -- TYPE III ENVIRONMENTAL DECLARATIONS -- PRINCIPLES AND PROCEDURES





11. CONTACT INFORMATION

EPD owner:

ADHESIVES - SEALANTS - CHEMICAL PRODUCTS FOR BUILDING

Mapei SpA

WWW.mapei.it

LCA Author:

Mapei SpA

Www.mapei.it; Environmental Sustainability Office

Programme operator:

EPD International AB info@environdec.com



SEDE MAPEI SpAVia Cafiero, 22 - 20158 Milano
Tel. +39-02-37673.1
Fax +39-02-37673.214

Internet: www.mapei.com E-mail: mapei@mapei.it



